

## 3535 Step Motor Drive

### Full & Half Stepping

3.5 amps, 35 VDC

#### Features

- DC bus voltage 12-35 VDC motor supply (including ripple)
- Switch selectable motor current from 0.4–3.5 amps/phase
- Switch selectable full or half step
- Automatic 50% idle current reduction
- Optically isolated 5 VDC inputs for step, direction and enable
- Enable input to turn off current to the motor
- 122 watts of usable power
- Screw terminal connectors
- MOSFET, dual H-bridge, inaudible PWM amplifier
- 3 state, pulse width modulated current control, switching at 20–30 KHz
- Drives 4, 6 or 8 lead size 11, 14, 17 or 23 step motors
- CE compliant


#### Description

The 3535 step motor driver is a full or half drive, step phase sequencer with MOSFET three state switching amplifiers and optoisolated circuits. The drive also includes an automatic feature to lower motor current by 50% anytime the motor is left at rest for more than one second.


The amplifier regulates motor current by chopping at a constant, inaudible frequency. Phase current is selected from 32 levels by a DIP switch. Full or half resolution is DIP switch selected.

#### Recommended motors for the 3535 drive:


| Size 11  | Size 14  | Size 17  | Size 23  |
|----------|----------|----------|----------|
| HT11-012 | 5014-842 | HT17-068 | HT23-394 |
| HT11-013 |          | HT17-071 | HT23-397 |
|          |          | HT17-075 | HT23-400 |

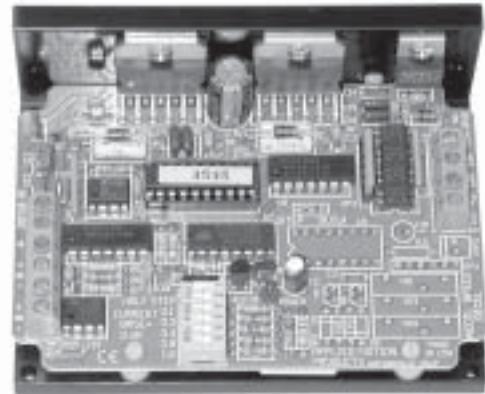










#### MECHANICAL OUTLINE

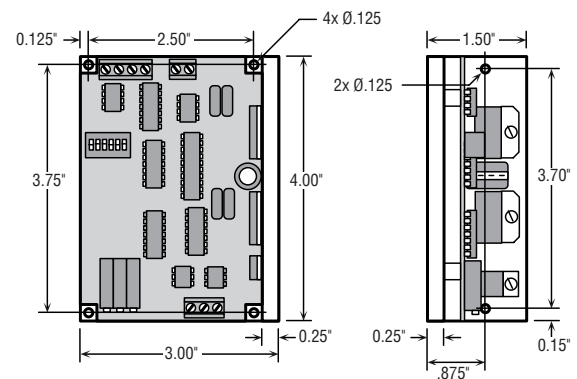

#### BLOCK DIAGRAM

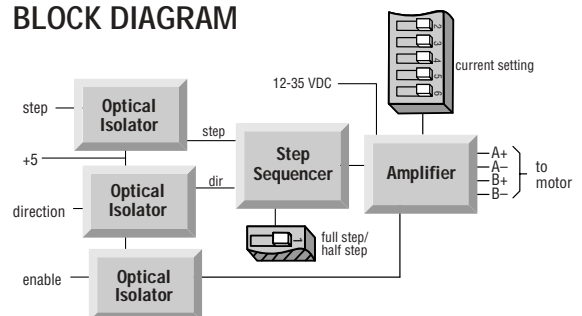

## 3535 Torque Curves

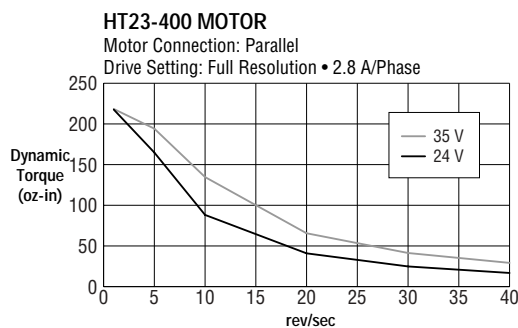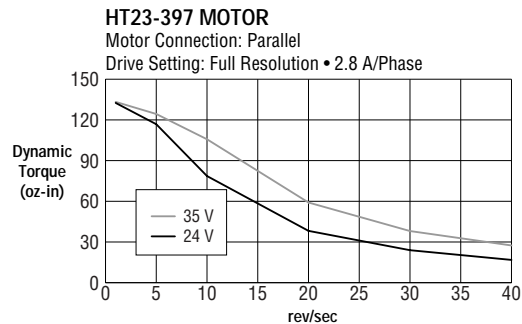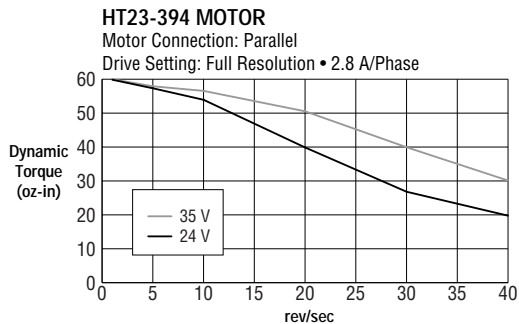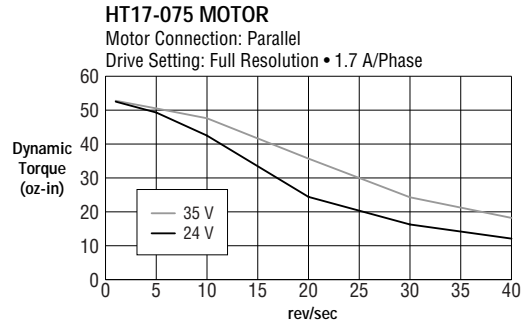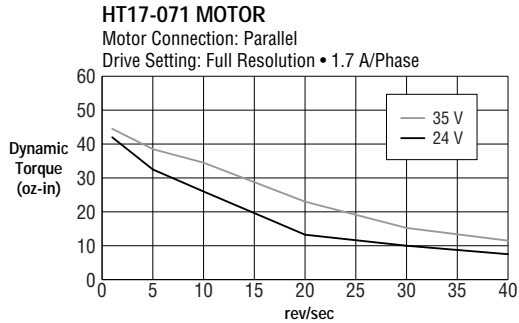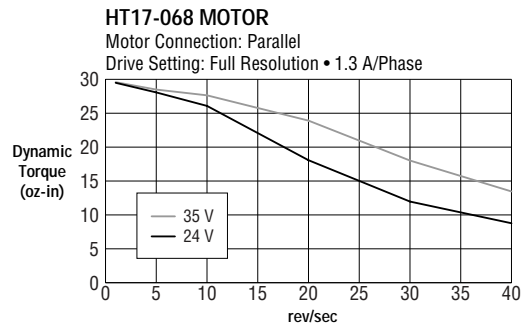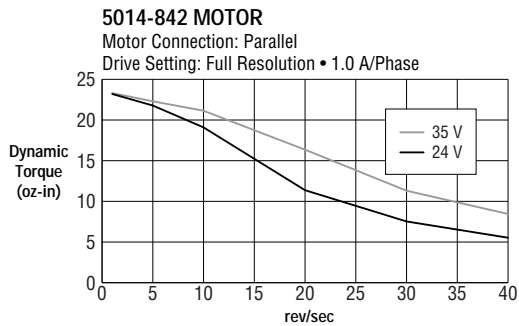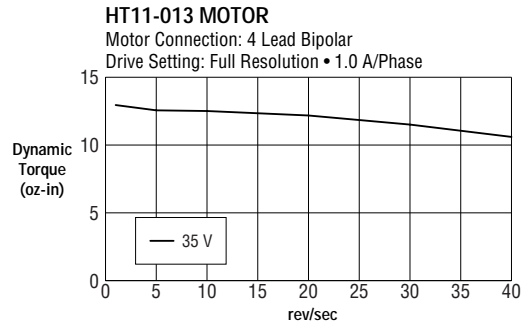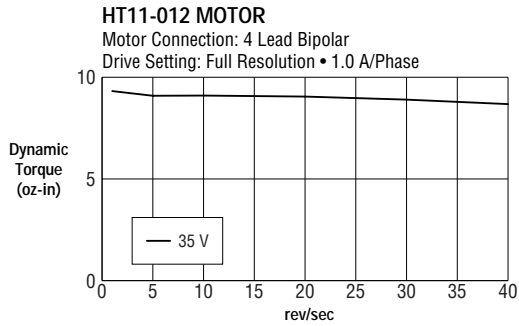

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Motor Drives](#) category:*

*Click to view products by [Applied Motion](#) manufacturer:*

Other Similar products are found below :

[GMA02](#) [R7DBP02L](#) [1300920283](#) [ST10-S](#) [GMA11](#) [GMA20](#) [R88DUA03LAAC100V30W](#) [R88DUA12HA](#) [R88DUP03LAAC100V30W](#)  
[STR2](#) [VFD002EL11A](#) [MFMCB0030GET](#) [MFECA0030EAM](#) [1302263150](#) [1300920078](#) [R88D-GT04H](#) [R88D-GN04H-ML2](#) [R7D-BP01H](#)  
[R88D-KN04L-ECT](#) [70354063](#) [79294435](#) [27358015](#) [15275008](#) [ST5-Q-EN](#) [1SFA896103R1100](#) [1SFA896103R7000](#) [1SFA896112R1100](#)  
[R88D-GP08H](#) [GNCF8-11](#) [KLC35BE](#) [ST10-Q-RN](#) [1302263161](#) [SV2D10-Q-AE](#) [VX5A1300](#) [R88A-CA1C005SF-E](#) [R88A-CR1B005NF-E](#)  
[SEH 71-4B](#) [U-PKZ0\(400V50HZ\)](#) [LUCC12BL](#) [LUCC12FU](#) [LU9BN11L](#) [LULC08](#) [GV2P01](#) [UDS1UR6M50CANCZ183](#) [LC1D09M7](#)  
[103H7126-1740](#) [103H7823-1741](#) [111.3761.20.00E](#) [111.3761.30.00E](#) [808070RAT250](#)