




TinkerKit!

## TinkerKit Mega Sensor Shield V.2

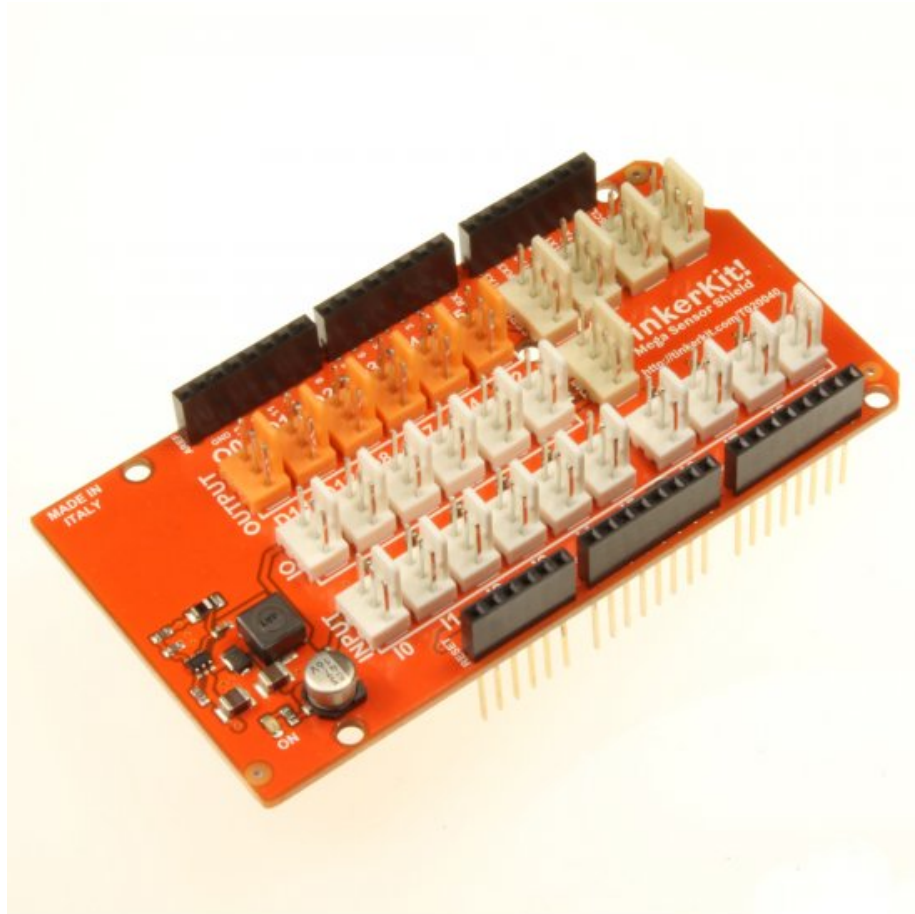

### Overview

The **Mega Sensor Shield v.2** allows you to hook up the TinkerKit **SENSORS** and **ACTUATORS** directly to the Arduino Mega or Mega 2560 or Mega ADK, without the use of the breadboard.

It has 22 standard TinkeKit 3pin connectors. The 10 labeled **I0** through **I9** are **Analog Inputs**. The ones labeled **O0** through **O5** are **Analog Outputs** connected to the PWM capable outputs of the Arduino Board (it is possible to change these to Digital Inputs, in which case they will report either HIGH or LOW, but nothing in between).

On a Standard Arduino Mega 2560 board the pins are:

Pin 11 on the Arduino Mega is O0 on the shield.

Pin 10 on the Arduino Mega is O1 on the shield.

Pin 9 on the Arduino Mega is O2 on the shield.

Pin 6 on the Arduino Mega is O3 on the shield.

Pin 5 on the Arduino Mega is O4 on the shield.

Pin 3 on the Arduino Mega is O5 on the shield.

The one labeled **IO (D13, D12, D8, D7, D4, D2)** are Input / Output pins capable of PWM, digitalRead and digitalWrite. They correspond to Digital 13, 12, 8, 7, 4, 2.

**Module description:** A green LED signals that the shield is correctly powered.

The **4pin TWI socket** allows communication to any device supporting the I2C protocol through the Wire library on Arduino. 5V and Ground are provided on the socket.

4 **4pin SERIAL socket** allows the board to communicate with other devices that support serial communication. 5V and Ground are provided on the socket for your convenience.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multiple Function Sensor Development Tools](#) category:*

*Click to view products by [Arduino](#) manufacturer:*

Other Similar products are found below :

[MAXWSNENV#](#) [STEVAL-MKIT01V1](#) [KT-O2-25%-TB200A-E](#) [KT-TVOC-200-TB200A](#) [KT-NmHc-200-TB200A](#) [SEN0344](#) [PIM520](#)  
[PIM518](#) [PIM519](#) [PIM502](#) [EVAL-AD7746HDZ](#) [AS7022-EVALKIT](#) [ALTEHTG2SMIP](#) [MAX30101WING#](#) [OB1203SD-U-EVK](#) [MIKROE-](#)  
[4265](#) [A000070](#) [EV\\_ICG-20660L](#) [GX-F12A-P](#) [GX-F15A](#) [GX-F6A-P](#) [GX-F8AI-P](#) [GX-F8B](#) [GX-H12A-P](#) [GX-H15AI-P](#) [GX-H6A-P](#) [GX-](#)  
[HL15B-P](#) [1093](#) [MIKROE-2455](#) [MIKROE-2458](#) [MIKROE-2507](#) [MIKROE-2508](#) [MIKROE-2516](#) [MIKROE-2529](#) [1458](#) [MIKROE-1628](#) [176](#)  
[189](#) [1893](#) [2106](#) [ATQT4-XPRO](#) [GP30-DEMO MODULE](#) [GX-F12AI-P](#) [GX-F15A-P](#) [GX-F8A-P](#) [GX-FL15B-P](#) [GX-H12AI-P](#) [GX-H15A-P](#)  
[GX-H6AI-P](#) [GX-H8A](#)