

Full metal, Cylindrical, Long Sensing Distance, Cable Connector Type Proximity Sensor

NEW

■ Features

- Long sensing distance
- High impact and wear resistance to friction with the work or metallic brush (sensing face/housing material: stainless steel)
- Reduced possibility of malfunction by aluminum scraps
- Excellent noise immunity with specialized sensor IC
- Built-in surge protection circuit and output short over current protection circuit
- Stability indicator (green LED) and operation indicator (red LED)
: excellent visibility with the 360° ring type indicator
- Equipped with the oil resistant cable
- Protection structure: IP67 (IEC standard)


⚠ Please read "Safety Considerations" in operation manual before using.



■ Durability Test


High resistance to the impact of removing Welding sludge attached to the sensing face

◎ Continuous hitting test

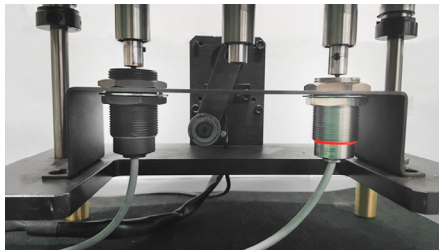

Test conditions

Hitting object: 1.3kg of weight
Hitting speed: 48 times per 1 min
The number of hitting times: 300 thousand times
Test model: PRFDW18



<Test result>

◎ Metallic brush test



Test conditions


Testing object: stainless cup brush
Rotation speed: 80RPM
Testing time: 3 hours
Test model: PRFDW18



<Test result>

■ Electromagnetic Resistance Test

Large current from welding generates magnetic field which can affect the proximity sensor to malfunction due to noise. This product, however, can be used near strong noise without malfunctioning, thanks to excellent electromagnetic resistance. This test is conducted in the environment of welding.

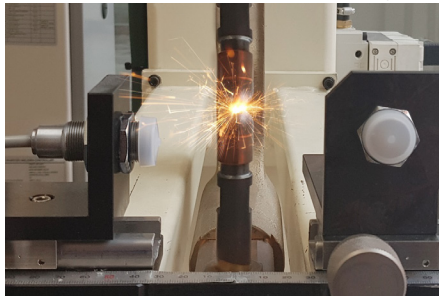

Test conditions

Welding current: 13,000A
Installation direction: front and side
Test model: PRFDW Series

Diameter of sensing side	Minimum sensing distance between weld and sensor	
Installation direction	Front	Side
12mm	No effect from noise	50mm
18mm	30mm	50mm
30mm	120mm	110mm

※ Minimum sensing distance can be different by welding environment.

※ When using PRFDW Series in the environment of welding, use the spatter-resistant protection cover.

The protection cover is sold separately. Refer to the 'Proper Usage' in (D) Proximity Sensors for usage of the protection cover.




Full metal, Cylindrical, Long Sensing Distance, Cable Connector Type

■ Effect of Aluminum Scraps

When aluminum scraps are attached or stacked at sensing side, the proximity sensor does not detect and sensing signal is OFF. However, the below cases may occur to sensing signal. In this case, remove the scraps.

(1) When the size of aluminum scraps (d) is bigger than 2/3 of the sensing side size (D)



Model	Size	D (mm)
PRFDW12		10
PRFDW18		16
PRFDW30		28

(2) When aluminum scraps are attached on the sensing side by external pressure



■ Specifications

● DC 2-wire type

Model		PRFDWT12-3DO-IV	PRFDWT18-7DO-IV	PRFDWT30-12DO-IV
Diameter of sensing side		12mm	18mm	30mm
Sensing distance※ ¹		3mm	7mm	12mm
Installation		Shield (flush)		
Hysteresis		Max. 15% of sensing distance		
Standard sensing target		12×12×1mm (iron)	30×30×1mm (iron)	54×54×1mm (iron)
Setting distance		0 to 2.1mm	0 to 4.9mm	0 to 8.4mm
Power supply (operating voltage)		12-24VDC≡ (10-30VDC≡)		
Leakage current		Max. 0.8mA		
Response frequency※ ²		80Hz	80Hz	50Hz
Residual voltage		Max. 3.5VDC≡		
Affection by Temp.		Max. ±20% for sensing distance at ambient temperature 20°C		
Control output		Max. 3 to 100mA		
Insulation resistance		Over 50MΩ (at 500VDC megger)		
Dielectric strength		1,000VAC 50/60Hz for 1 min		
Vibration		1.5mm amplitude at frequency 10 to 55Hz (for 1 min) in each X, Y, Z direction for 2 hours		
Shock		1,000m/s ² (approx. 100G) in each X, Y, Z direction for 10 times		
Indicator		Stability indicator: green LED, Operation indicator: red LED		
Environ	Ambient temperature	-25 to 70°C, storage: -25 to 70°C		
-ment	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH		
Protection circuit		Surge protection circuit, output short over current protection circuit		
Protection		IP67 (IEC standard)		
Cable		Ø5mm, 2-wire, 300mm, M12 connector (AWG22, core diameter: 0.08mm, no. of cores: 60, insulator diameter: Ø1.25mm)		
Material		Case/Nut: stainless steel 303 (SUS 303), washer: stainless steel 304 (SUS 304), sensing side: stainless steel 303 (SUS 303, thickness of PRFDWT12/18: 0.4mm, PRFDWT30: 0.5mm), oil resistant cable (gray): oil resistant polyvinyl chloride (PVC)		
Approval		CE		
Weight※ ³		Approx. 110g (approx. 83g)	Approx. 132g (approx. 97g)	Approx. 225g (approx. 170g)

※1: When using the nut which is not stainless steel 303 (SUS303) material such as brass, the sensing distance is variable.

※2: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※3: The weight includes packaging. The weight in parenthesis is for unit only.

※Environment resistance is rated at no freezing or condensation.

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) Door/Area Sensors

(D) Proximity Sensors

(E) Pressure Sensors

(F) Rotary Encoders

(G) Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets

(H) Temperature Controllers

(I) SSRs / Power Controllers

(J) Counters

(K) Timers

(L) Panel Meters

(M) Tacho / Speed / Pulse Meters

(N) Display Units

(O) Sensor Controllers

(P) Switching Mode Power Supplies

(Q) Stepper Motors & Drivers & Controllers

(R) Graphic/ Logic Panels



(S) Field Network Devices

(T) Software

PRFDW Series



■ Dimensions

● PRFDWT12-3DO-IV

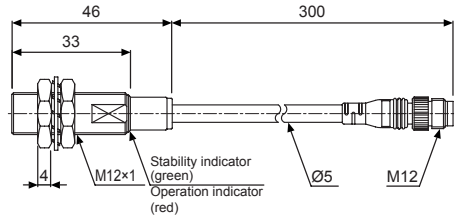



(unit: mm)

● PRFDWT18-7DO-IV

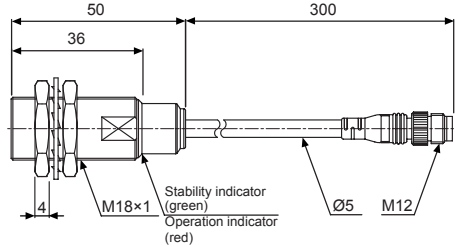


● PRFDWT30-12DO-IV

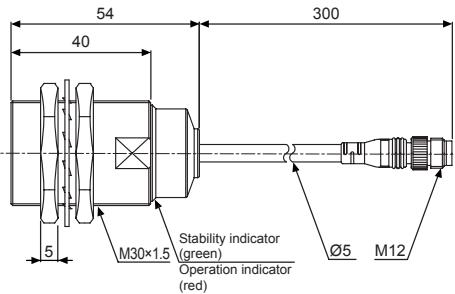

■ Control Output Diagram & Load Operating


● DC 2-wire type

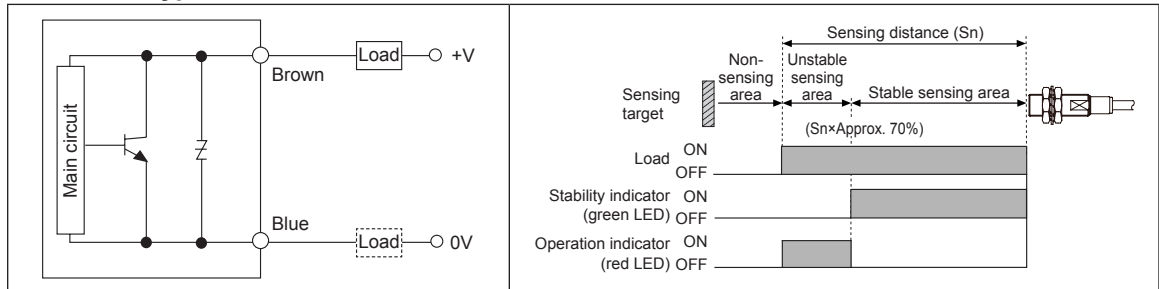

■ Connections

● DC 2-wire type (IEC standard)

Normally Open (N.O.)

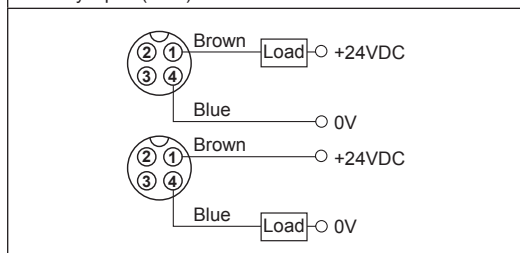


※②, ③ are N-C (Not Connected) terminals.

※For the type and specifications of connector wires, please refer to G-5 page.

Full metal, Cylindrical, Long Sensing Distance, Cable Connector Type

■ Sensing Distance Feature Data by Target Material and Size



(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) Door/Area Sensors

(D) Proximity Sensors

(E) Pressure Sensors

(F) Rotary Encoders

(G) Connectors/
Connector Cables/
Sensor Distribution
Boxes/Socket

(H) Temperature
Controllers

(I) SSRs / Power
Controllers

(J) Counters

(K) Timers

(L) Panel
Meters

(M) Tacho /
Speed / Pulse
Meters

(N) Display
Units

(O) Sensor
Controllers

(P) Switching
Mode Power
Supplies


(Q) Stepper Motors
& Drivers
& Controllers

(R) Graphic/
Logic
Panels


(S) Field
Network
Devices

(T) Software


● PRFDWT12-3DO-IV

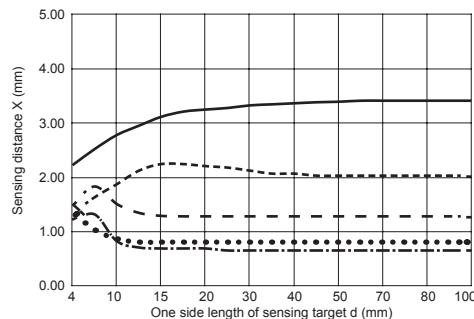


● PRFDWT18-7DO-IV

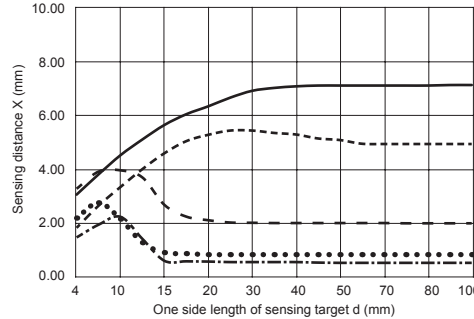


● PRFDWT30-12DO-IV

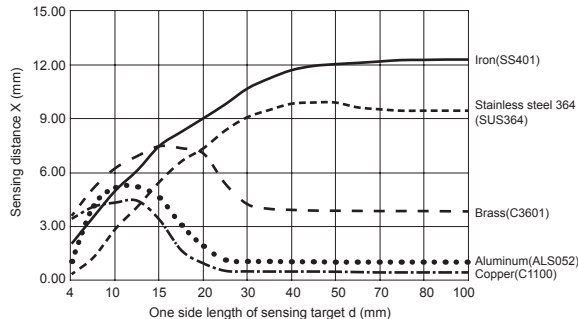


■ Sensing Distance Feature Data by Parallel (Left/Right) Movement




● PRFDWT12-3DO-IV

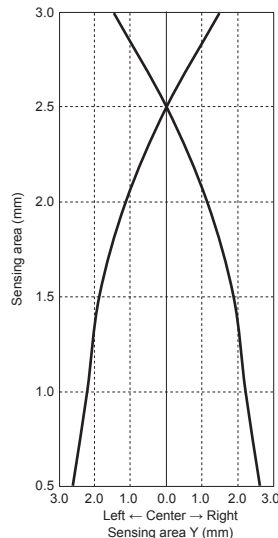

● PRFDWT18-7DO-IV

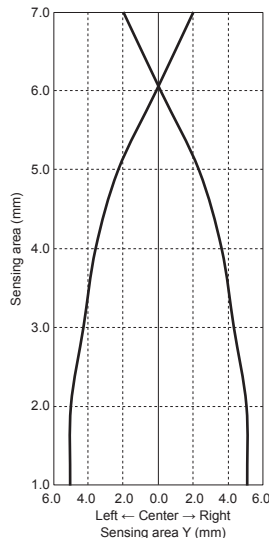



● PRFDWT30-12DO-IV

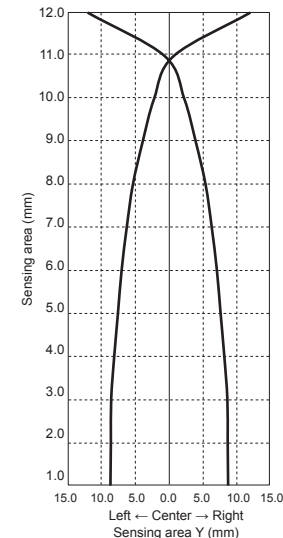

PRFDW Series

■ Proper Usage


◎ Load connections

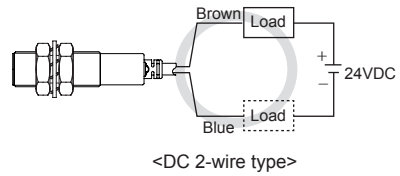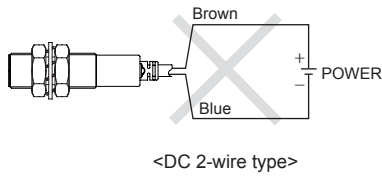

When using DC 2-wire type proximity sensor, the load must be connected, otherwise internal components may be damaged. The load can be connected to either wire.

◎ In case of the load current is small

● DC 2-wire type



$$R \leq \frac{V_s}{I_o - I_{off}} \text{ (k}\Omega\text{)} \quad P > \frac{V_s^2}{R} \text{ (W)}$$

[Vs: Power supply, I_o : Min. action current of proximity sensor, I_{off} : Return current of load, P : Number of Bleeder resistance watt]



Please make the current on proximity sensor smaller than the return current of load by connecting a bleeder resistor in parallel.

※W value of Bleeder resistor should be bigger for proper heat dissipation.


◎ Mutual-interference & Influence by surrounding metals

When several proximity sensors are mounted close to one another a malfunction of the may be caused due to mutual interference. Therefore, be sure to keep a minimum distance between the two sensors as below chart indicates.

Do NOT connect the sensors more than three in parallel.



When sensors are mounted on metallic panel, it is required to protect the sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart indicates.

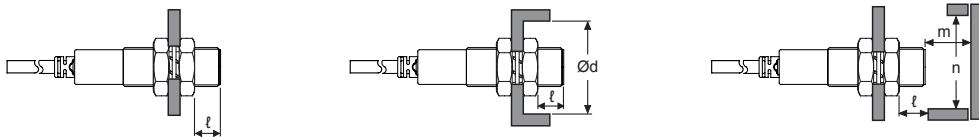

(unit: mm)

Model	PRFDWT12-3DO-IV	PRFDWT18-7DO-IV	PRFDWT30-12DO-IV
Item			
A	40	65	110
B	35	60	100
ℓ	0	0	0
Ød	12	18	30
m	12	28	48
n	40	60	100

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [Autonics](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [9221350022](#) [980659-1](#) [QT-12](#)
[E2EX10D1NN](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2E-X3D1-N 10M](#) [E2E-X4MD1-G](#) [E2FMX1R5D12M](#) [E2K-F10MC1 5M](#)
[EI1204TBOSL-6](#) [EI5515NPAP](#) [BSA-08-25-08](#) [IC08ANC15PO-K](#) [IMM2582C](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#)
[25.523.3253.0](#) [9151710023](#) [922FS1.5C-A4P-Z774](#) [SC606ABV0S30](#) [SM952A126100LE](#) [A1220EUA-T](#) [F3S-A162-U](#) [CL18](#) [QT-08L](#)
[34.110.0010.0](#) [TL-C2MF1-M3-E4](#) [IA08BLF15NOM5](#) [IA08BSF15NOM5](#) [IA12ASF04DOM1](#) [IMM32188C](#) [IS2](#) [IS31SE5000-UTLS2-TR](#)
[34.110.0021.0](#) [34.110.0022.0](#) [CA150-120VACDC](#) [VM18VA3000Q](#) [XS508BSCBL2](#) [XS512BLNAM12](#)