


TROMPETER SPECIFICATION SHEET
CABLE, RADIO FREQUENCY, TWIN CONDUCTOR, BALANCED LINE
TWC-78-1

RED INDICATES ORIGINAL

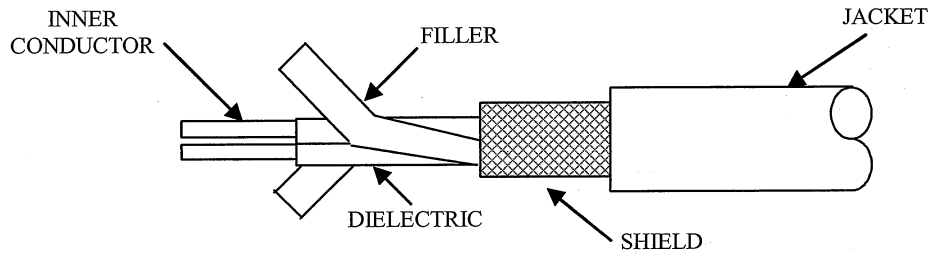

REQUIREMENTS:

1. IMPEDENCE (OF PAIR) ----- 78 ± 3 OHMS
2. OPERATING VOLTAGE ----- 0.3 KVRMS MAX/0.6 KVDC MAX
3. BEND RADIUS ----- 1.5 INCH MIN
4. CAPACITANCE ----- COND TO COND ----- 20.3 PF/FT MAX
 ----- CONDS TO SHIELD ----- 36.5 PF/FT
5. CONDUCTOR LOOP RESISTANCE ----- 179 OHMS/M FT MAX
6. VELOCITY OF PROPAGATION ----- 66% NOM
7. ATTENUATION: FREQUENCY dB/100 FT NOM FREQUENCY dB/100 FT NOM

1 MHz	2.00	40 MHz	10.60
3 MHz	3.00	50 MHz	11.90
4 MHz	3.50	100 MHz	16.80
5 MHz	4.00	200 MHz	23.70
7 MHz	4.50	500 MHz	37.50
10 MHz	5.30	700 MHz	44.30
20 MHz	7.50	1000 MHz	53.00
30 MHz	9.20		
8. WEIGHT ----- 15.7 LB/1000 FT
9. OPERATING TEMPERATURE RANGE ----- -40° C TO +80° C
10. MARK: TROMPETER ELECTRONICS TWINAX TWC-78-1 (*)
 (*) VENDOR I.D. CODE

DESCRIPTION	CONSTRUCTIONAL DETAILS
INNER CONDUCTORS	TWO CONDUCTORS, EACH 7 STRANDS OF AWG SIZE 33 TINNED COPPER WIRE PER ASTM-B-33. NOM DIA .022
DIELECTRICS	TWO EACH POLYETHYLENE PER L-P-390C, TYPE II, C1.H, 1 EA GR.3, NATURAL, 1 EA GR.2, BLUE. .043 ± .002 DIA TYP
FILLERS	TWO EACH POLYETHYLENE PER L-P-390C, TYPE II C1.L GR.3
CABLE CORE	.085 ± .003 O.D. DIELECTRICS AND FILLERS TO HAVE A RIGHT HAND OR LEFT HAND LAY, 8 TWISTS PER FOOT. AN OPTIONAL NYLON-THREAD WRAP MAY THEN BE APPLIED WITH SUFFICIENT COVERAGE TO MAINTAIN THE POSITION OF THE COMPONENTS
SHIELD	SINGLE BRAID, AWG SIZE 36 TINNED COPPER WIRE SHIELD COVERAGE 93%. .108 NOM O.D.
JACKET	BLUE (PER EIA-359-A, MUNSELL COLOR CHART, SYMBOL CENTROID) POLYVINYLCHLORIDE .150 ± .005 O.D.

DATE 7-1-2008
 APPR *[Signature]*
 DWN MWJ
 ECO 16590
 REV L

TSI	DWN	M JOHNSON	3-12-08	MATERIAL	CODE IDENT	DRAWING NO.	REV
	CHK	<i>jm</i>	6-26-08	_____	14949	TWC-78-1	L
	ENG	_____	_____	SCALE -----	DATE 10-6-76	SHEET	
	APPR	<i>jm</i>	4-30-08				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coaxial Cables](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[89880-003-1000](#) [CY2389-000](#) [8221-010-U1000](#) [9116-010-U500](#) [1322R-010-1000](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [735A1-008-1000](#) [8212-010-U500](#) [480414-000](#) [7915A 009U1000](#) [5024A1311-0](#) [1281S5 010250](#) [1530A 010U1000](#) [9248 010U1000](#) [9244 0101000](#) [1694A 0081000](#) [1190A 0101000](#) [8241F J5C1000](#) [1674A TIN50](#) [7915A 0091000](#) [TRCH-50-2](#) [9066 0031000](#) [7805R 008100](#) [1674A TIN100](#) [9116SB 0101000](#) [9271 0061000](#) [1613A 0101000](#) [1807A B591000](#) [5339Q5 009U500](#) [539945 0091000](#) [9116R 0101000](#) [89207 010100](#) [9058 0101000](#) [8241A 0101000](#) [DA7805R 0101000](#) [C6424](#)