

BK PRECISION®

BK PRECISION®

Instruction Manual

PN: 480 – 826 – 9 – 001
Printed in China
©1998 B&K Precision Corp.

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4604
USA
TEL: 714-921-9095
FAX: 714-921-6422
www.bkprecision.com

Model 3003
10 MHz HANDHELD SIGNAL GENERATOR



SAFETY GUIDELINES

WARNING

An electrical current of over 10 milliamps passing through the heart will stop most human hearts. Voltage of as low as 35Volts dc or ac rms should be considered hazardous since it can produce lethal current under certain conditions. Be sure to observe the following safety precautions:

1. There are no high voltages in the signal generator, but the equipment under test usually contains hazardous high voltage. Always follow the safety recommendations of the manufacturer of your equipment.
2. Some equipment may be wired as a "hot chassis" type; equipment using two-wire power plugs are always suspect and it may even include those with polarized plugs. Never touch chassis of "hot chassis" type equipment to avoid the possibility of a serious, possibly fatal electrical shock.
3. Don't expose yourself needlessly to high voltage; only remove housings and covers when necessary.
4. Familiarize yourself with the equipment being tested and the location of its high voltage points. However be aware that high voltage may appear at unexpected points in defective equipment.
5. Never work alone. Someone should be nearby to render aid if needed. Training in CPR (Cardio-pulmonary resuscitation) is highly recommended.

Service Information

Contact B&K Precision to receive a repair Return Authorization tracking number. This number must be clearly written on the exterior of the shipping carton and will assist us with the processing of your return. Return all merchandise to B&K Precision Corp. with pre-paid shipping. The flat-rate repair charge includes return shipping to locations in North America. For overnight shipments and non-North America shipping fees contact B&K Precision Corp.

Warranty Service: Please return the product in the original packaging with proof of purchase to the below address. Clearly state in writing the performance problem and return any leads, connectors and accessories that you are using with the device.

Non-Warranty Service: Return the product in the original packaging to the below address. Clearly state in writing the performance problem and return any leads, connectors and accessories that you are using with the device. Customers not on open account must include payment in the form of a money order or credit card. For the most current repair charges contact the factory before shipping the product.

B&K Precision Corp.
22820 Savi Ranch Parkway
Yorba Linda, CA 92887
Phone: 714-921-9095
Facsimile: 714-921-6422

Include with the instrument your complete return shipping address, contact name, phone number and description of problem.

10 MHz SIGNAL GENERATOR

SPECIFICATIONS

Introduction:

The Model 3003 signal generator is a cost-effective signal source. Its architecture is based on the latest advances in DDS (direct-digital synthesizer) technology. Microprocessor control delivers clean and accurate **DC to 10MHz** waveforms with **frequency accuracy of 0.02% and 0.1 Hz frequency resolution**. User-friendly features include eight push wheel switches which enable the user to quickly and easily set the frequency. The unit also has following features.

- ◆ Produces sine and square waves.
- ◆ Variable amplitude control for sine wave.
- ◆ Standard BNC connectors for sine and square waves.
- ◆ An adapter power source or one 9V battery.
- ◆ Low battery indicator.

Frequency Characteristics

| | | |
|-----------|--------------------|-------------|
| Waveforms | Sine, Square | |
| Range | DC to 9.9999999MHz | 0.1Hz steps |
| Accuracy | 0.02% | |

Sine Wave

| | |
|------------------|---|
| Output | 0 – 4.5Vp-p (no load) Variable amplitude control |
| Output impedance | 50 ohms |

Square Wave

| | |
|------------------|-----------------|
| Output | 5Vp-p (no load) |
| Duty Cycle | 50% typical |
| Output impedance | 50 ohms |

| | |
|--------------|---|
| Power | An external AC adapter (6V - 9V DC 150mA 5.5mm x 2.1mm center pin+) or one 9V battery |
|--------------|---|


| | |
|-------------------|--------------------|
| Dimensions | 2.1" x 3.6" x 6.0" |
|-------------------|--------------------|

Controls and Indicators

1. **Power Switch** – Power on or off
2. **Power Indicator** – LED to show when power is on.
3. **Frequency indicator** – The eight push wheel switches indicate the frequency that output on the sine and square waves jacks.
4. **Output level control** – Controls the amplitude of the sine wave at output jack.
5. **Sine connector** – Sine wave output at this jack.
6. **Square connector** – Square wave output at this jack.
7. **Bat Low** – Indicates battery condition.
8. **AC Adapter Jack** – (6.5V – 9V) DC, 150mA center pin + adapter input.

HANDHELD SIGNAL GENERATOR

MODEL 3003

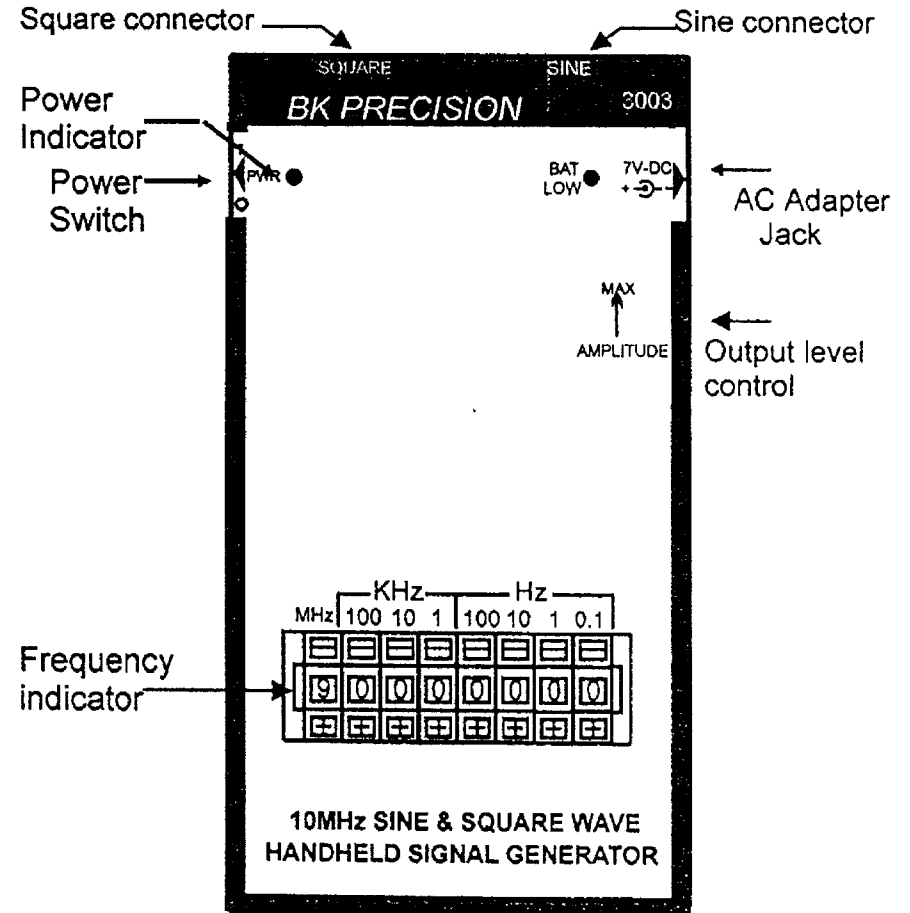

OPERATION:

1. Turn the unit on and select the desired frequency of the waveform by pushing the eight push wheel switches.
2. Adjust the amplitude of the output as desired using the output level control (affects sine wave output jack only).
3. Connect the generator output to desired test points.

CAUTION:

The signal generator output should never be connected to a signal injection point. Excessive voltage at the point of signal injection of the signal generator can cause internal damage.



Limited One-Year Warranty

B&K Precision Corp. warrants to the original purchaser that its product and the component parts thereof, will be free from defects in workmanship and materials for a period of one year from the date of purchase.

B&K Precision Corp. will, without charge, repair or replace, at its' option, defective product or component parts. Returned product must be accompanied by proof of the purchase date in the form a sales receipt.

To obtain warranty coverage in the U.S.A., this product must be registered by completing and mailing the enclosed warranty card to B&K Precision Corp., 22820 Savi Ranch Parkway, Yorba Linda, CA 92887 within fifteen (15) days from proof of purchase.

Exclusions: This warranty does not apply in the event of misuse or abuse of the product or as a result of unauthorized alternations or repairs. It is void if the serial number is alternated, defaced or removed.

B&K Precision Corp. shall not be liable for any consequential damages, including without limitation damages resulting from loss of use. Some states do not allow limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific rights and you may have other rights, which vary from state-to-state.

Model Number: _____ Date Purchased: _____

22820 Savi Ranch Parkway
Yorba Linda, CA 92887

714-921-9095 VOICE
714-921-6422 FAX

OTHER TEST & MEASUREMENT PRODUCTS AVAILABLE FROM B&K PRECISION

B & K Precision offer many different types of electronic test equipment to suit your needs. Below is a list of the different product categories of test equipment we offer.

High-Performance Oscilloscopes
Oscilloscope Accessories
High Performance Multimeters
Handheld Digital Multimeters
Bench Top Digital Multimeter
Digital Multimeter Accessories
Power Supplies
Function Generators
Frequency Counters
Spectrum Analyzers

Universal Device Programmers
Insulation Testers
Digital Thermometers
Capacitance & Semiconductor testers
Component Testers
LCR Meters
Telephone Product Testers
Video Testers
CRT Tester/Restorer & analyzers

For more information on these products please contact B&K Precision for your local distributor or to request literature. You can contact us at:

**B&K Precision Corp. 22820 Savi Ranch Parkway • Yorba Linda CA,
92887-4604**

**PHONE (714)- 921-9095 • FAX (714)- 921-6422
(800)-462-9832**

www.bkprecision.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Function Generators & Synthesisers](#) category:

Click to view products by [B&K Precision](#) manufacturer:

Other Similar products are found below :

[3001](#) [CT3734](#) [4047B](#) [4010A](#) [SFG-210](#) [SFG-205](#) [33502A/903](#) [4013B](#) [AD9166BBPZ](#) [CT3736](#) [FIT0778](#) [28II](#) [3446GPBU](#) [EDU33211A](#)
[EDU33212A](#) [U2010A](#) [MOKU:GO M1 \(STORM\)](#) [MOKU:GO M0 \(STORM\)](#) [MOKU:GO M2 \(STORM\)](#) [MOKU:GO M0 \(WHITE\)](#)
[MOKU:GO M1 \(WHITE\)](#) [MOKU:GO M2 \(WHITE\)](#) [IZD0024](#) [114991659](#) [T3AFG10](#) [T3AFG500](#) [T3AFG5](#) [T3AFG30](#) [T3AFG60](#) [T3AFG80](#)
[W09-4A-12V](#) [33509B](#) [33519B](#) [33512B](#) [33520B](#) [33522B](#) [AFG31051](#) [AFG31101](#) [AFG31152](#) [AFG31251](#) [AFG31252](#) [CT3733](#) [33510B/903](#)
[4011A](#) [33509B/903](#) [33511B/903](#) [33612A](#) [4010](#) [4053](#) [4001A](#)