

# GW101 / GW201 SUPERCAPACITOR

## Datasheet Rev 4.3, July 2018

This Datasheet should be read in conjunction with the CAP-XX Supercapacitors Product Guide which contains information common to our product lines.

### Electrical Specifications

The GW101 is a single cell supercapacitor. The GW201 is a dual cell supercapacitor with two GW101 cells in series, so GW201 capacitance = Capacitance of GW101/2 and GW201 ESR = 2 x GW101 ESR.

**Table 1: Absolute Maximum Ratings**

Parameter	Name		Conditions	Min	Typical	Max	Units
Terminal Voltage	V <sub>peak</sub>	GW101		0		2.75	V
		GW201				5.5	
Temperature	T <sub>max</sub>			-40		+70	°C

**Table 2: Electrical Characteristics**

Parameter	Name		Conditions	Min	Typical	Max	Units
Terminal Voltage	V <sub>n</sub>	GW101		0		2.5	V
		GW201		0		5.0	
Capacitance	C	GW101	DC, 23°C	740	800	960	mF
		GW201		320	400	480	
ESR	ESR	GW101	DC, 23°C		30	36	mΩ
		GW201			55	66	
Leakage Current	I <sub>L</sub>		2.3V, 23°C 120hrs		1	2	μA
RMS Current	I <sub>RMS</sub>		23°C			6	A
Peak Current <sup>1</sup>	I <sub>P</sub>		23°C			30	A


<sup>1</sup>Non-repetitive current, single pulse to discharge fully charged supercapacitor.

**Table 3: Thickness**

GW101F	1.3mm	No adhesive tape on underside of the supercapacitor	GW101G	1.4mm	Adhesive tape on underside, release tape removed
GW201F	2.7mm		GW201G	2.8mm	

## Definition of Terms

In its simplest form, the Equivalent Series Resistance (ESR) of a capacitor is the real part of the complex impedance. In the time domain, it can be found by applying a step discharge current to a charged cell as in Fig. 1. In this figure, the supercapacitor is pre-charged and then discharged with a current pulse,  $I=1\text{A}$  for duration  $0.01\text{secs}$ .

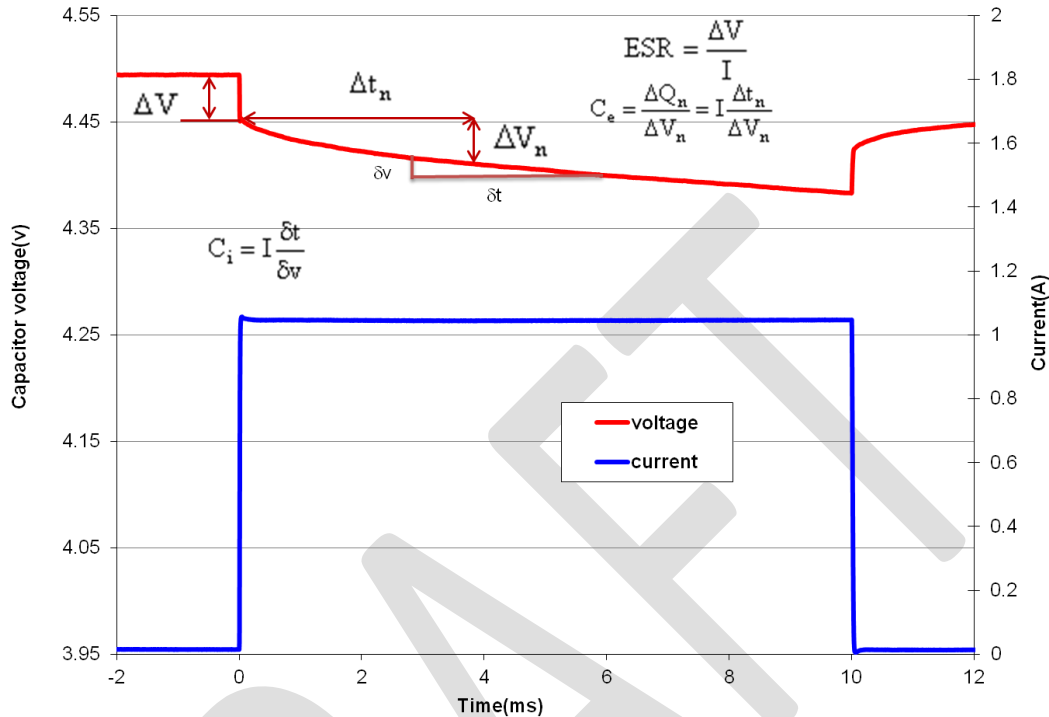


**Figure 1: Effective capacitance, instantaneous capacitance and ESR for a GW201**

The ESR is found by dividing the instantaneous voltage step ( $\Delta V$ ) by  $I$ . In this example  $= (4.494\text{V} - 4.457\text{V}) / 1.02\text{A} = 36\text{m}\Omega$ .

The instantaneous capacitance ( $C_i$ ) can be found by taking the inverse of the derivative of the voltage, and multiplying it by  $I$ .

The effective capacitance for a pulse of duration  $\Delta t_n$ ,  $C_e(\Delta t_n)$  is found by dividing the total charge removed from the capacitor ( $\Delta Q_n$ ) by the voltage lost by the capacitor ( $\Delta V_n$ ). For constant current  $C_e(\Delta t_n) = I \times \Delta t_n / \Delta V_n$ .  $C_e$  increases as the pulse width increases and tends to the DC capacitance value as the pulse width becomes very long ( $\sim 10\text{secs}$ ). After 2msecs, Fig 1 shows the voltage drop  $V_{2\text{ms}} = (4.457\text{V} - 4.422\text{V}) = 35\text{mV}$ . Therefore  $C_e(2\text{ms}) = 1.02\text{A} \times 2\text{ms} / 35\text{mV} = 58.3\text{mF}$ . After 10ms, the voltage drop  $= 4.457\text{V} - 4.383\text{V} = 74\text{mV}$ . Therefore  $C_e(10\text{ms}) = 1.02\text{A} \times 10\text{ms} / 74\text{mV} = 138\text{mF}$ . The DC capacitance of a GW201 =  $400\text{mF}$ . Note that  $\Delta V$ , or  $IR$  drop, is not included because very little charge is removed from the capacitor during this time.  $C_e$  shows the time response of the capacitor and it is useful for predicting circuit behavior in pulsed applications.


## Measurement of DC Capacitance

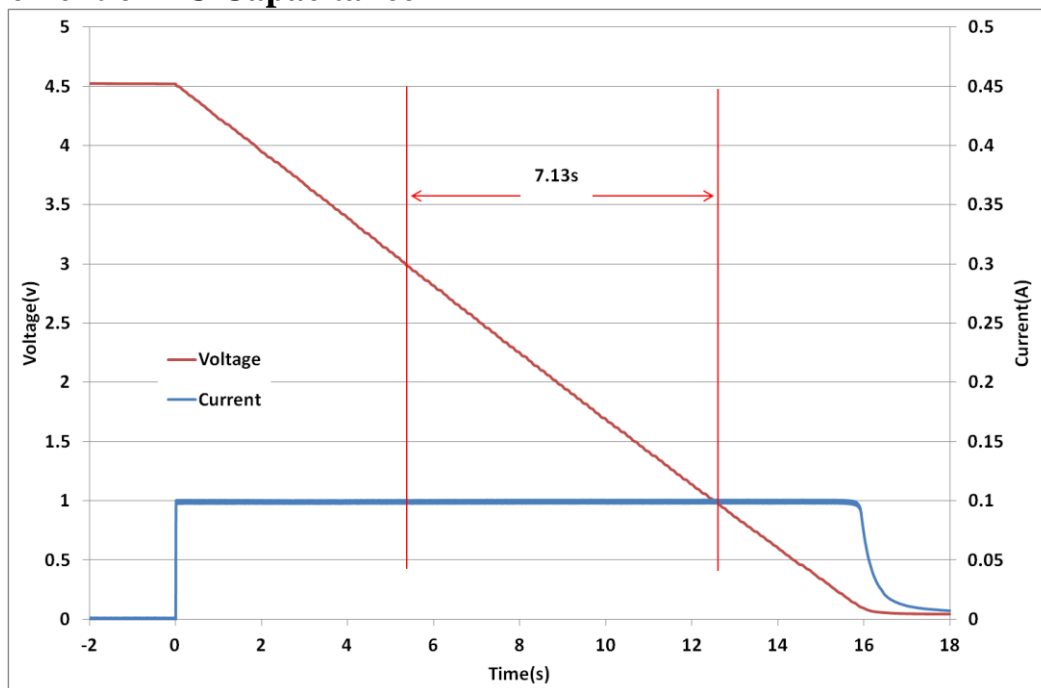

**Fig 2: Measurement of DC Capacitance for a GW201**

Fig 2 shows the measurement of DC capacitance by drawing a constant 100mA current from a fully charged supercapacitor and measuring the time taken to discharge from 1.5V to 0.5V for a single cell, or from 3V to 1V for a dual cell supercapacitor. In this case,  $C = 0.1A \times 7.13s / 2V = 356.5mF$ , which is well within the 400mF +/- 20% tolerance for a GW201 cell.


## Measurement of ESR

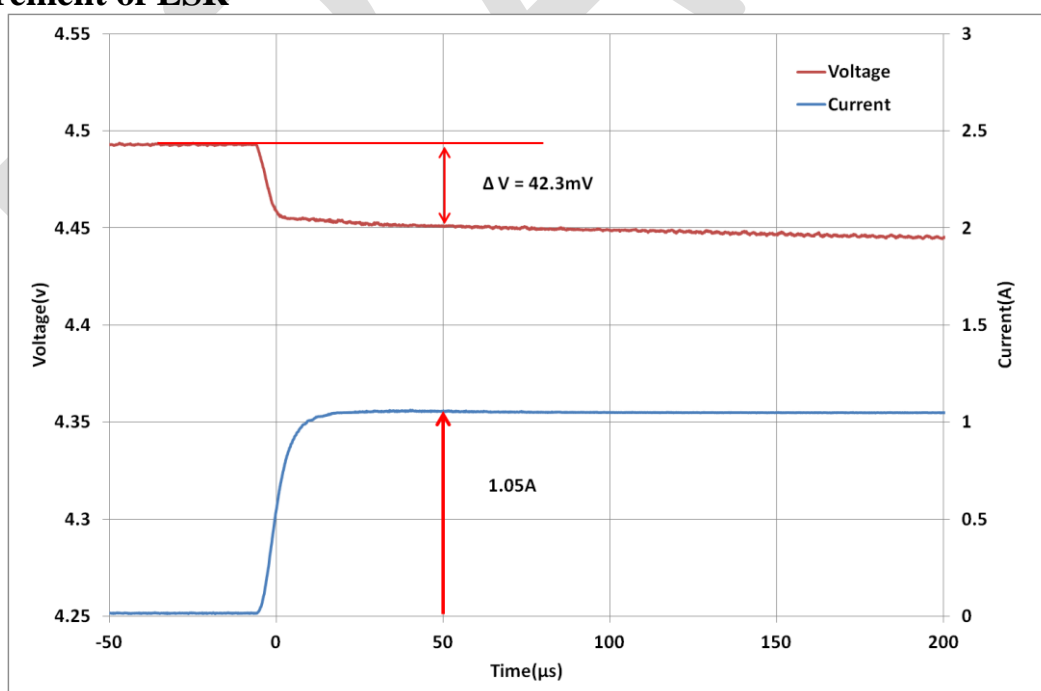

**Fig 3: Measurement of ESR for a GW201**

Fig 3 shows DC measurement of ESR by applying a step load current to the supercapacitor and measuring the resulting voltage drop. CAP-XX waits for a delay of 50μs after the step current is applied to ensure the voltage and current have settled. In this case the ESR is measured as  $42.3mV / 1.05A = 40.3m\Omega$ .


## Effective Capacitance

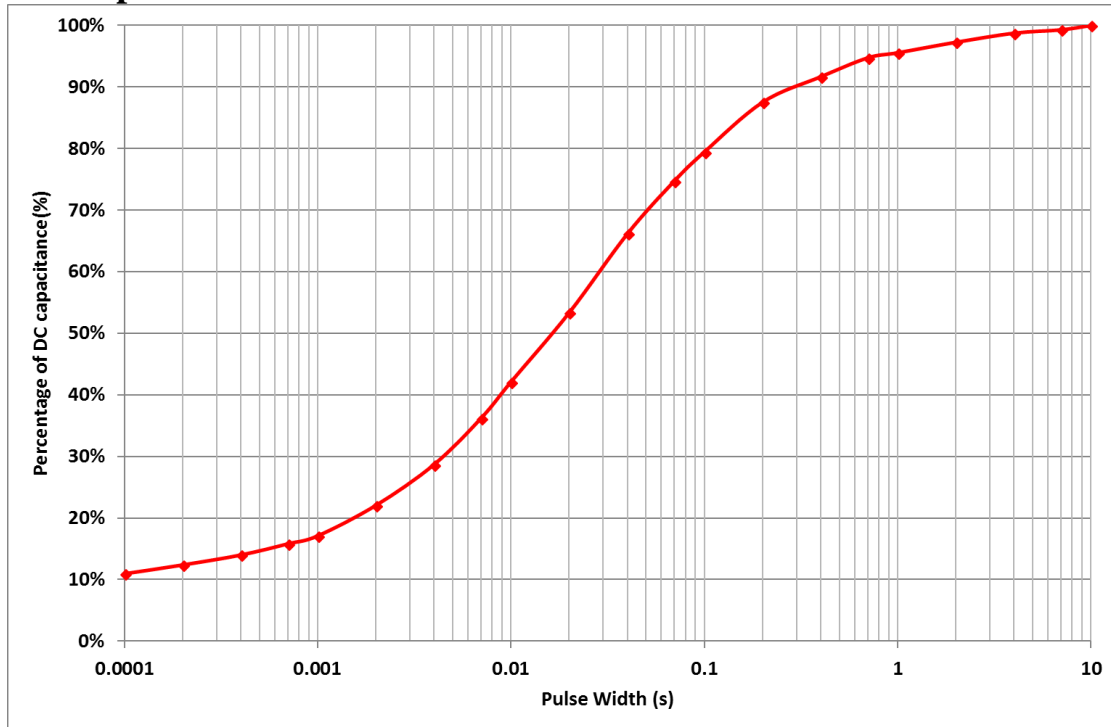

**Figure 4: Effective Capacitance**

Fig 4 shows the effective capacitance for the GW101, GW201 @ 23°C. This shows that for a 1ms PW, you will measure 17% of DC capacitance or 136mF for a GW101 or 68mF for a GW201. At 10ms you will measure 42% of the DC capacitance, and at 100ms you will measure 79% of DC capacitance. Effective is a time domain representation of the supercapacitor's frequency response. If, for example, you were calculating the voltage drop if the supercapacitor was supporting 1A for 10ms, then you would use the  $C_{eff}(10ms) = 42\%$  of DC capacitance = 168mF for a GW201, so  $V_{drop} = 1A \times ESR + 1A \times duration/C = 1A \times 55m\Omega + 1A \times 10ms / 168mF = 115mV$ . The next section on pulse response shows how the effective capacitance is sufficient for even short pulse widths.


## Pulse Response

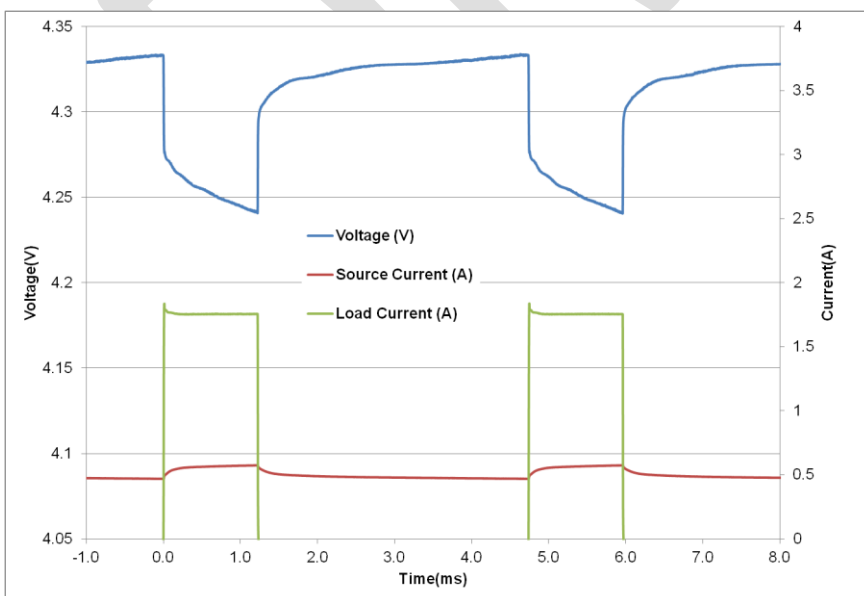

**Fig 5: GW201 Pulse Response with GPRS Class 10 Pulse Train**

Fig 5 shows that the GW201 supercapacitor does an excellent job supporting a GPRS class 10 pulse train, drawing 1.8A for 1.1ms at 25% duty cycle. The source is current limited to 0.6A and the supercapacitor provides the 1.2A difference to achieve the peak current. At first glance the freq response of Fig 8 indicates the supercapacitor would not support a 1ms pulse, but the  $C_{eff}$  of 56mF coupled with the low ESR supports this pulse train with only ~93mV droop in the supply rail.


## DC Capacitance variation with temperature

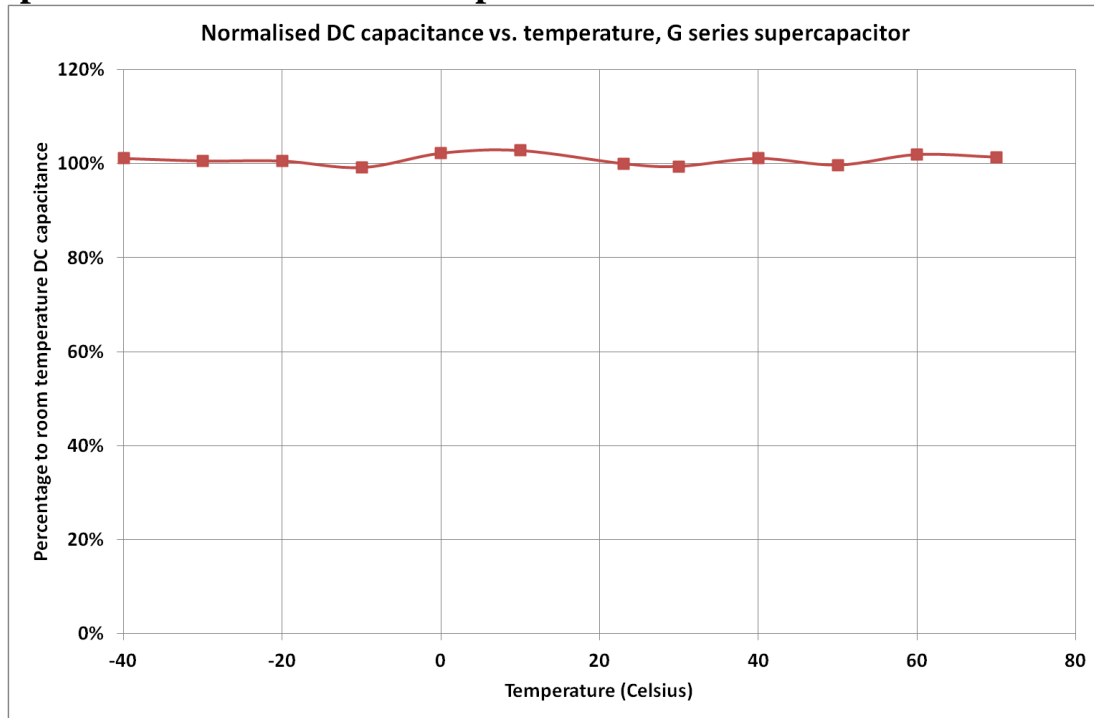

**Figure 6: Capacitance change with temperature**

Fig 6 shows that DC capacitance is approximately constant with temperature.

## ESR variation with temperature

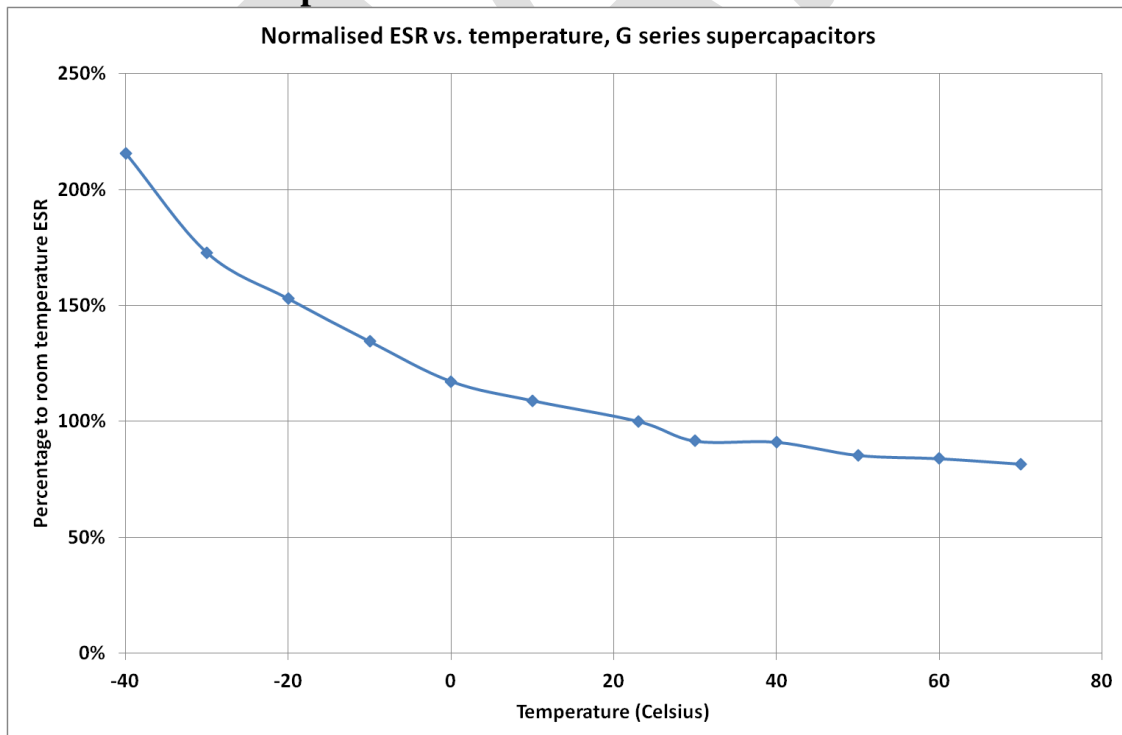

**Figure 7: ESR change with temperature**

Fig 7 shows that ESR at  $-40^{\circ}\text{C}$  is  $\sim 2.2 \times$  ESR at room temp, and that ESR at  $70^{\circ}\text{C}$  is  $\sim 0.80 \times$  ESR at room temperature.

## Frequency Response

GW201 Magnitude and Phase vs. Frequency

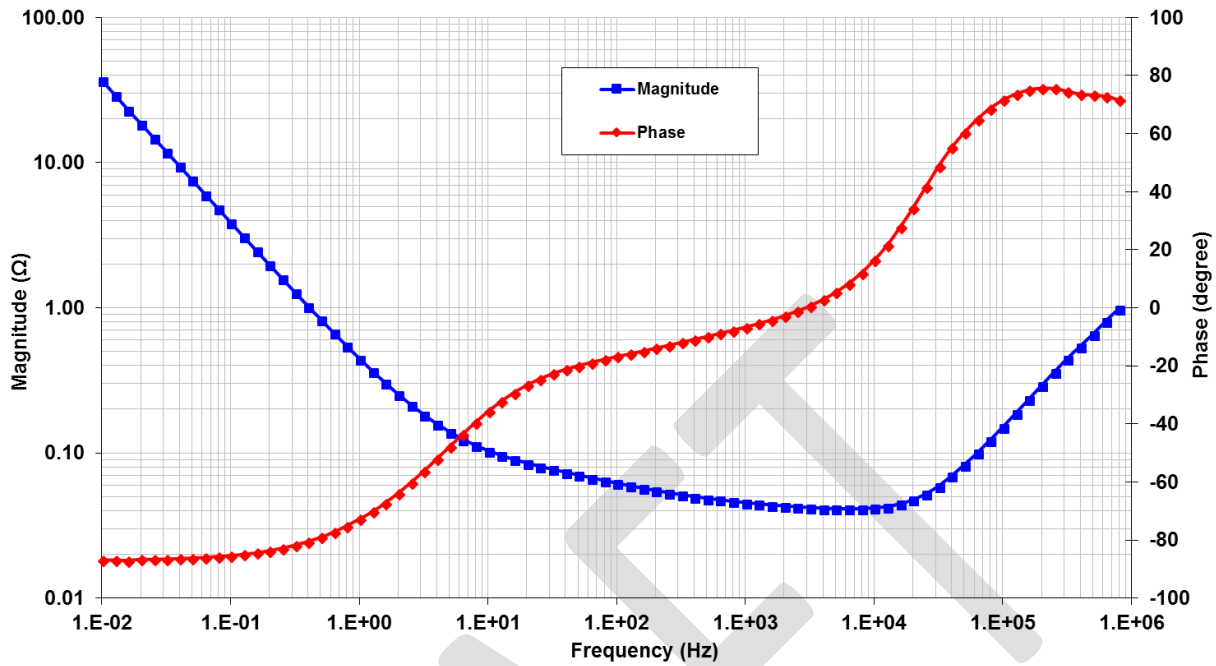


Fig 8: Frequency Response of Impedance (biased at 5V with a 50mV test signal)

GW201 ESR, Capacitance and Inductance vs. Frequency


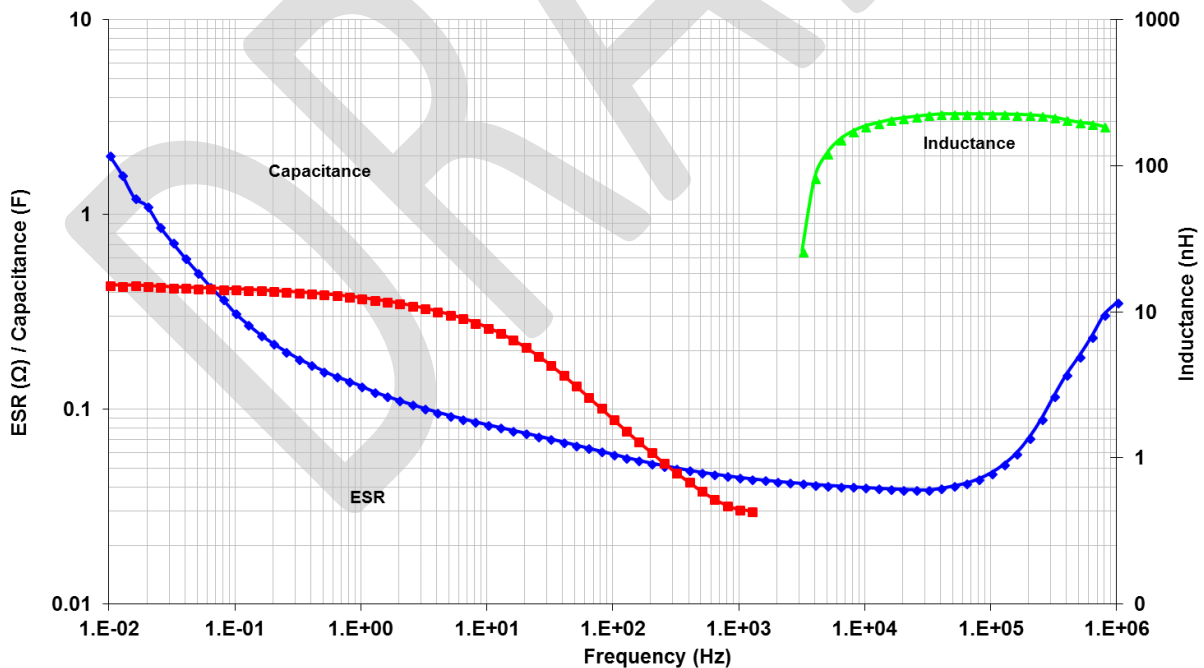


Fig 9: Frequency Response of ESR, Capacitance & Inductance

Fig 8 shows the supercapacitor behaves as an ideal capacitor until approx 6 Hz when the magnitude no longer rolls off proportionally to 1/freq and the phase crosses  $-45^\circ$ . Performance of supercapacitors with frequency is complex and the best predictor of performance is Fig 4 showing effective capacitance as a function of pulsewidth.


## Leakage Current

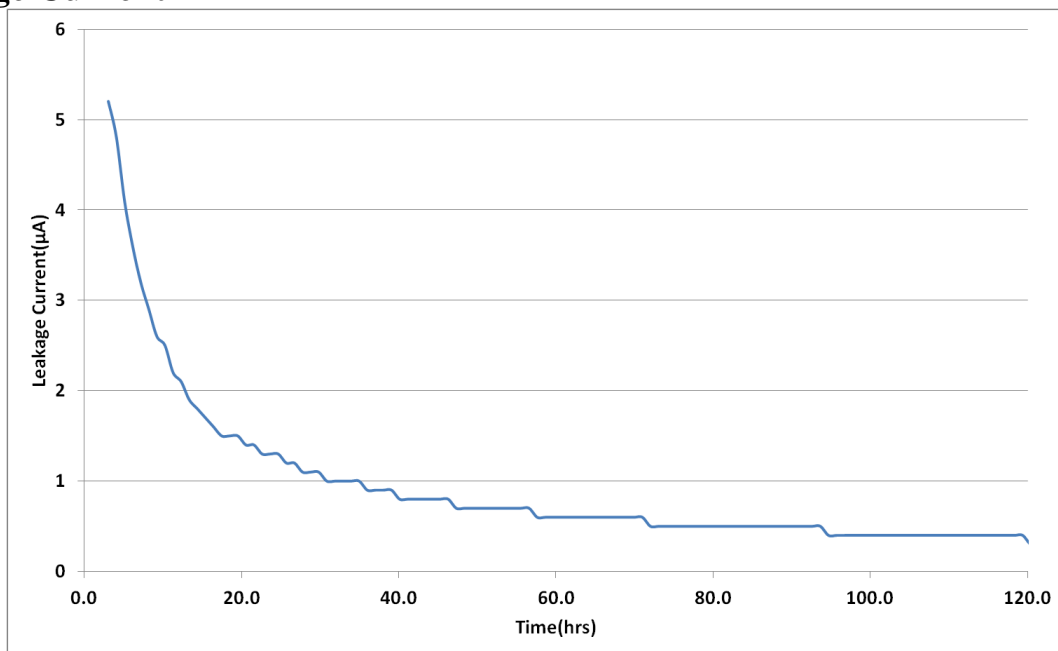

**Fig 10: Leakage Current**

Fig 10 shows the leakage current for GW101 at room temperature. The leakage current decays over time and the equilibrium value leakage current will be reached after ~120hrs at room temperature. The typical equilibrium leakage current is 0.5µA at room temperature. At 70°C leakage current will be ~5µA.


## Charge Current

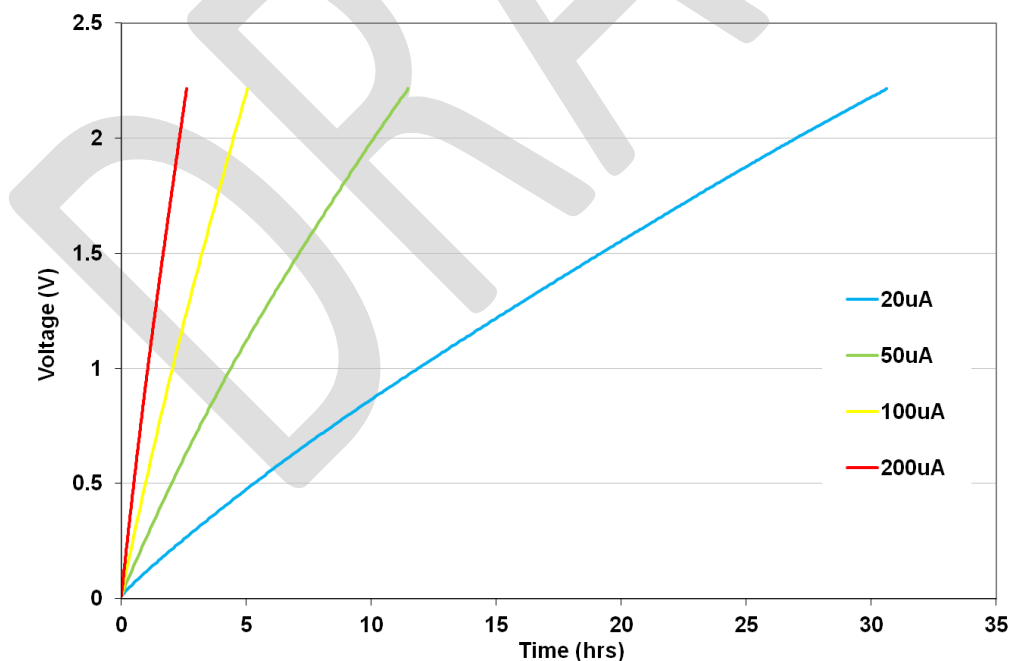

**Fig 11: Charging an GW101 with low current**

The corollary to the slow decay in leakage currents shown in Fig 10 is that charging a supercapacitor at very low currents takes longer than theory predicts. At higher charge currents, the charge rate is as theory predicts. For example, it should take  $0.7F \times 2.3V / 0.00002A = 22.4hrs$  to charge a 0.7F supercapacitor to 2.3V at 20µA, but Fig 11 shows it took 30hrs. At 100µA charging occurs at a rate close to the theoretical rate.

## RMS Current

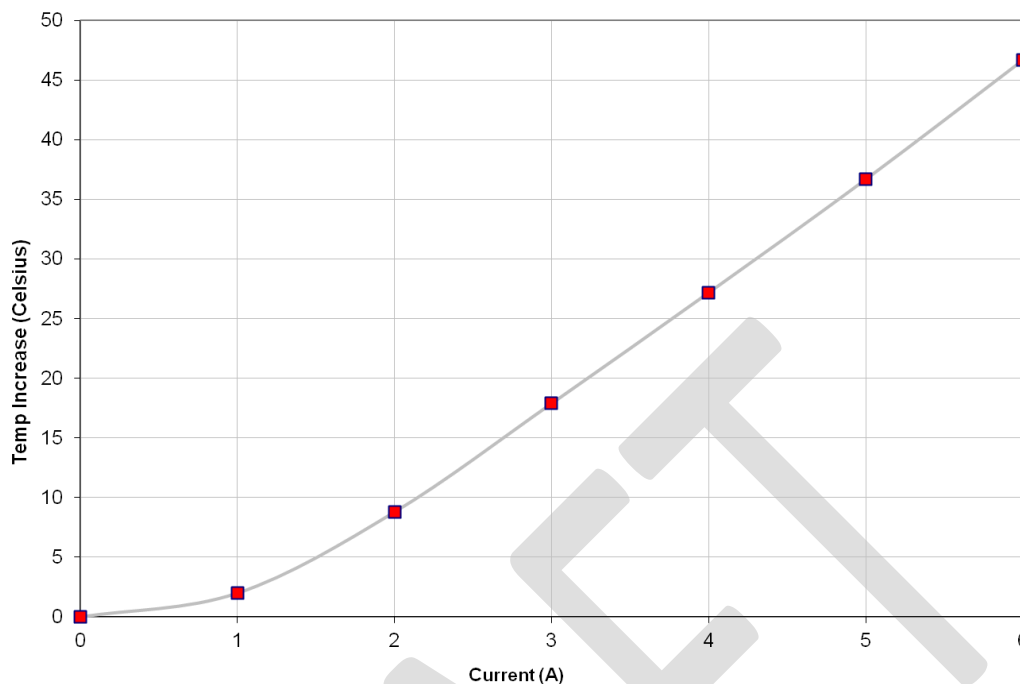

**Fig 12: Temperature rise in GW201 with RMS current**

Continuous current flow into/out of the supercap will cause self heating, which limits the maximum continuous current the supercapacitor can handle. This is measured by a current square wave with 50% duty cycle, charging the supercapacitor to rated voltage at a constant current, and then discharging the supercapacitor to half rated voltage at the same constant current value. For a square wave with 50% duty cycle, the RMS current is the same as the current amplitude. Fig 12 shows the increase in temperature as a function of RMS current. From this, the maximum RMS current in an application can be calculated, for example, if the ambient temperature is 40°C, and the maximum desired temperature for the supercapacitor is 70°C, then the maximum RMS current should be limited to 4.3 A, which causes a 30°C temperature increase.

## CAP-XX Supercapacitors Product Guide

Refer to the package drawings in the CAP-XX Supercapacitors Product Guide for detailed information of the product's dimensions, PCB landing placements, active areas and electrical connections.

Refer to the CAP-XX Supercapacitors Product Guide for information on endurance and shelf life, transportation and storage, assembly and soldering, safety and RoHS/EREACH certification.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Supercapacitors](#) / [Ultracapacitors](#) category:*

*Click to view products by [Cap-XX](#) manufacturer:*

Other Similar products are found below :

[DCK-3R3E224U-E](#) [BZ12GA154ZHB](#) [BZ195B273ZNBDM](#) [C-TEC2403-1](#) [C-TEC2410-10](#) [CEM2](#) [KW-5R5C105H-R](#) [KW-5R5C224H-R](#)  
[KR-5R5C105H-R](#) [DBJ-5R5D105T](#) [DXJ-5R5H334U](#) [DSK-3R3H703T414-HRL](#) [DHL-5R5D224GT](#) [LX055105A](#) [LT055105A](#)  
[SCCY73B407SLBLE](#) [VPF127M3R8](#) [VPF706M3R8](#) [VMF706M3R8](#) [VMF506M3R8](#) [VPF506M3R8](#) [VMF306M3R8](#) [VPF227M3R8](#)  
[VMF227M3R8](#) [VMF127M3R8](#) [DB5U207M30045HA](#) [DH5U128W60074TH](#) [DRE10/2.5](#) [DRL106S0TI25RRDAP](#) [DRL226S0TK25RR](#)  
[106DCN2R7M](#) [SCCR20B335SRB](#) [SCCS30B106SRB](#) [SCCT30B156SRB](#) [SCCU30B306MRB](#) [SCCW45B107VSB](#) [SCMR14C474MSBA0](#)  
[SCMR22C155MRBA0](#) [SCMR22C155MSBA0](#) [SCMS22C255MRBA0](#) [SCMT22C505MRBA0](#) [SCMT32C755MRBA0](#)  
[DRL475S0TG20RRDAP](#) [FT0H225ZF](#) [FCS0H224ZFTBR24](#) [FR0H473ZF](#) [GS206F](#) [DS5U506M18040BB](#) [SCCV40B506MRB](#)  
[NEXT474Z5.5V16.5X13F](#)