

Energy Management Energy Meter Type EM330



- Digital input (for tariff management)
- Easy connection or wrong current direction detection
- Certified according to MID Directive (option PF only): see "how to order" below
- Other versions available (not certified, option X): see "how to order" on the next page

- Three phase energy meter
- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Accuracy $\pm 0.5\%$ RDG (current/voltage)
- Current measurement via CT
- Backlit LCD display (3x 8-digit) with integrated touch key-pad
- Energy readout on display: 8 digit
- Variable readout on display: 4 digit
- Energy measurement: kWh and kvarh (imported/exported); kWh+ by 2 tariffs; kWh per phase
- System variables: kW, kvar, kVA, VLL, VLN, PF, Hz, kWdmd, kWdmd peak
- Phase variables: kW, kvar, kVA, VLL, VLN, A, PF
- Auxiliary power supply
- Dimensions: 3-DIN module
- Protection degree (front): IP51
- Pulse output (optional, by open collector PNP)
- RS485 Modbus port (optional)
- M-bus port (optional)
- Run hour meter
- Neutral current calculation

Product description

Three-phase energy meter with backlit LCD display with integrated touch keypad. Particularly indicated for active energy metering and for cost


allocation (CT connection), with dual tariff management availability. It can measure imported and exported energy or be programmed to consider

only the imported one. Housing for DIN-rail mounting, with IP51 front degree protection. The meter is optionally provided with pulse output proportional

to the active energy being measured, RS485 Modbus port or M-bus port. Available for legal metrology (PF option, only for imported energy).

MID Certified according to MID Directive, Module B and Module D of Annex II, for legal metrology relevant to active electrical energy meters (see Annex V, MI003, of MID). Can be used for fiscal (legal) metrology.

How to order EM330 DIN AV5 3 H O1 PF B

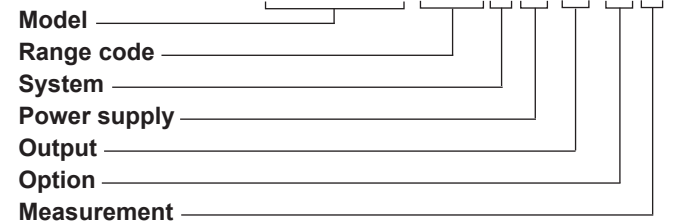

Type Selection


| Range code | System | Power supply | Output |
|--|---|--|--|
| AV5: 400 VLL AC - 5(6)A (CT connection) | 3: 3-phase, 3 or 4 wire | H: auxiliary power supply 90 to 260 V ac/dc | O1: pulse output S1: RS485 Modbus port M1: M-bus port |
| Option | Measurement | | |
| PF: Certified according to MID Directive. Can be used for fiscal (legal) metrology. | A: The power is always integrated (both in case of positive imported and negative exported power) and the total energy meter is certified according to MID. B: Only the total positive energy meter is certified according to MID. | | |



STANDARD

Not certified according to MID Directive. Cannot be used for fiscal (legal) metrology.

How to order **EM330 DIN AV5 3 H O1 X**

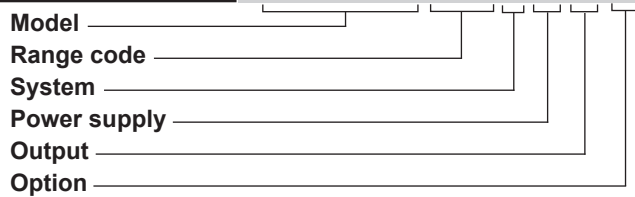

Type Selection

| Range code | System | Power supply | Output |
|--|---|--|--|
| AV5: 400 to 480 VLL ac - 5(6)A (CT connection) 230 to 277 VLN ac - 5(6)A (CT connection) | 3: 3-phase, 3- or 4-wire; 2-phase 3-wire, 1-phase 2 wire | H: auxiliary power supply 100 to 240V ac/dc | O1: pulse output S1: RS485 Modbus port M1: M-bus port |

Option

X: none

Input specifications

| | | | |
|--------------------------------------|---|-----------------------------------|--|
| Rated Inputs | | Temperature drift | ≤200ppm/°C |
| Current type | 3-phase loads, CT connection | Sampling rate | 4096 samples/s @ 50Hz 4096 samples/s @ 60Hz |
| Current range | 5(6)A | Display and touch key-pad | |
| Nominal voltage | AV5: 400 to 480 VLL ac | Type | Backlit LCD, 3 rows by 8-digit each, h 7 mm |
| Max CTxVT | AV5: 1000 | Read-out | Energy: 8 digit. Variables: 4 digit |
| Accuracy | | Touch key | 3 (DOWN, Enter and UP). |
| (@25°C ±5°C, R.H. ≤60%, 45 to 65 Hz) | | Max. and Min. indication | |
| Current | AV5: Imin=0.25A; In: 5A, Imax: 6A; Un: 230 to 277 VLN (400 to 480 VLL) From 0.04In to 0.2In: ±(0.5%RDG+1DGT) From 0.2In to Imax: ±(0.5%RDG) | Energies | Max. 99 999 999 Min. 0.01 |
| Phase-neutral voltage | In the range Un: ±(0.5% RDG) | Variables | Max. 9999 Min. 0.01 |
| Phase-phase voltage | In the range Un: ±(1% RDG) | Memory | |
| Frequency | Range: 45 to 65Hz. | Energy | 10 ¹² cycles. Energy value is saved every time the less significant digit increases. |
| Active power | From 0.05 In to Imax, within Un range, PF=1: ±(1% RDG) From 0.1 In to Imax, within Un range, PF=0.5L or 0.8C: ±(1% RDG) | Programming parameters | 10 ¹² cycles. When a parameter is modified, only the relevant memory cell is overwritten |
| Power factor | ±[0.001+1%(1.000 - "PF RDG")] | LEDs | |
| Reactive power | From 0.05 In to Imax, within Un range, sinphi=1: ±(2% RDG) From 0.1 In to Imax, within Un range, sinphi=0.5L or 0.8C: ±(2% RDG) | Flashing red light pulses | Proportional to the product of the CT and VT ratios |
| Energies | | Weight (pulses/kWh) 1 | > 700,1 (CT x VT) |
| Active energy | Class 1 according to EN62053-21 and MID Annex MI-003 Class B (Class B (kWh) according to EN50470-3) | Weight (pulses/kWh) 10 | 70.1–700 (CT x VT) |
| Reactive energy | Class 2 according to EN62053-23 | Weight (pulses/kWh) 100 | 7.1–70 (CT x VT) |
| Start-up current: | 10mA | Weight (pulses/kWh) 1000 | < 7.1 (CT x VT) |
| Start-up voltage | 90VLN | Duration | 90ms |
| Resolution | Display | Fix orange light | wrong current direction (only with PFB option or with "B" measurement selection in case of X option) |
| Current | 0.1 A | Current overloads | |
| Voltage | 0.1 V | Continuous | 6A, @ 50Hz |
| Power | 0.01 kW or kvar | For 500ms | 5 In |
| Frequency | 0.1 Hz | Voltage Overloads | |
| PF | 0.01 | Continuous | 1.2 Un |
| Energies (positive) | 0.01 kWh or kvarh | For 500ms | 2 Un |
| Energies (negative) | 0.01 kWh or kvarh | Input impedance | |
| Serial communication | | 230VL-N | 1.2 Mohm |
| Current | 0.001 A | 5(6) A | < 0.072 VA per channel |
| Voltage | 0.1 V | Wrong connection detection | Installation guide to indicate if connections are correctly carried out. Can be disabled. |
| Power | 0.1 W or var | Phase sequence | Indicates if the phase sequence is not the correct one (L1-L2-L3) |
| Frequency | 0.1Hz | Correct current direction | Indicates if the current direction is not the right one (only with PFB option or with type "B" measurement selection in case of X option). |
| PF | 0.001 | | |
| Energies (positive) | 0.001 kWh or kvarh | | |
| Energies (negative) | 0.001 kWh or kvarh | | |
| Energy additional errors | | | |
| Influence quantities | According to EN62053-21 | | |

Input specifications (cont.)

| | | |
|-----------------|--|---|
| Load conditions | The wrong connection detection works in case of loads with: - PF>0.766 (<40°) if inductive or PF>0.996 (<5°) if capacitive - a current at least equal to 10% rated current | are summed to increase the total positive energy totalizer (kWh+), while the others increase the total negative totalizer (kWh-). Ex. P L1= +2kW, P L2 . +2kW, P L3 = -3 kW |
| Energy metering | in every measuring interval the single phase energies with positive sign | Integration time = 1 hour +kWh = (2+2) x1h = 4 kWh -kWh = 3 x 1h= 3kWh |

Digital input specifications

| | | | |
|-----------------------------|--|--------------------|---|
| Digital inputs | Free of voltage contact | Contact resistance | ≤1kohm, close contact |
| Function | Tariff management (switch between t1-t2) | Overload | ≥100kohm, open contact |
| Number of inputs | 1 | | In case a voltage is erroneously applied to the digital input, the input is not damaged up to 30 V ac/dc. |
| Contact measurement voltage | 5 V | | |
| Input impedance | 1kohm | | |

Output specifications

| | | | |
|--------------------------|--|-----------------------------|--|
| RS485 serial port | RS485 by screw connection. | Meters in the M-bus network | 250 |
| Function | For communication of measured data, programming parameters | Primary address | Selectable |
| Protocol | ModBus RTU (slave function) | Secondary address | Univocally defined in each unit |
| Baud rate | 9.6, 19.2, 38.4, 57.6, 115.2 kbaud, | Identification number range | from 9000 0000 to 9999 9999 |
| Data format | even or no parity, | Other | Available functions: wild card, header, initialisation |
| Address | 1 to 247 (default: 01) | | SND_NKE, and req_uds management. Management of primary address |
| Driver input capability | 1/8 unit load. Maximum 247 devices on the same bus. | | modification via M-bus and reset of partial energy via M-bus available. |
| Data refresh time | 1sec | | VIF, VIFE, DIF and DIFE: see protocol |
| Read command | 50 words available in 1 read command | Static output | |
| Rx/Tx indication | Rx segment on display is shown when a valid Modbus command is sent to that specific meter Tx segment on display is shown when a valid Modbus reply is sent back to the master | Purpose | For pulse output proportional to the active energy (kWh) |
| | | Pulse rate | Selectable in multiple of 100 Max 500 or 1500 kWh according to pulse ON duration |
| M-bus port | M-bus by screw connection. | | Note: max CTxVT x pulse ratio 20000 (e.g.: if pulse ratio is set to 1000, CTxVT max = 20) |
| Function | For communication of measured data | | |
| Protocol | M-bus according to EN13757-1 | | |
| Baud rate | 0.3, 2.4, 9.6 kbaud | | |

Output specifications

| | | | |
|--|---|-------------------|---|
| Weight (pulses/kWh) 1 Weight (pulses/kWh) 10 Weight (pulses/kWh) 100 Weight (pulses/kWh) 1000 | Note 2: in MID models, the pulse rate is automatically set according to CT x VT ratio: > 700,1 (CT x VT) 70.1–700 (CT x VT) 7.1–70 (CT x VT) < 7.1 (CT x VT) | Pulse ON duration | Selectable: 30 ms or 100 ms according to EN62052-31 |
| | | Output type | Open collector PNP |
| | | Load | V_{ON} 1 V dc max. 100mA |
| | | | V_{OFF} 80 V dc max. |

General specifications

| | | | |
|------------------------------------|---|----------------------------|---|
| Operating temperature | -25 to +65 °C (-13 to 149° F), indoor, (R.H. from 0 to 90% non-condensing @ 40°C) | Standard compliance | EN62052-11 |
| Storage temperature | -30°C to +80°C (-22 to 176° F) (R.H. < 90% non condensing @ 40°C) | Safety | EN62053-21, EN50470-3 |
| Overvoltage category | Cat. III | Metrology | |
| Insulation (for 1 minute) | 4000 V ac RMS between measuring inputs and digital/serial output (see table) 4000 V ac RMS | Approvals | CE, MID (PF option only), cULus (UL61010-1) |
| Dielectric strength | 4000 V ac RMS for 1 minute | Connections | |
| EMC | Electrostatic discharges Immunity to irradiated electromagnetic fields Electromagnetic fields | Cable cross-section area | Voltage inputs: max. 4 mm ² , min. 1 mm ² with/without metallic cable ferrule; Max. screw tightening torque: 0.6 Nm |
| | | Other terminals | 1.5 mm ² , Min./Max. screws tightening torque: 0.4 Nm |
| Burst | On current and voltage measuring inputs circuit: 4kV | Housing | |
| Immunity to conducted disturbances | 10V/m from 150KHz to 80MHz | Dimensions (WxHxD) | 54 x 90 x 63 mm |
| | | Material | Noryl, self-extinguishing: UL 94 V-0 |
| Surge | On current and voltage measuring inputs circuit: 4kV; | Sealing covers | Included |
| Radio frequency | According to CISPR 22 | Mounting | DIN-rail |
| | | Front | IP51 |
| | | Screw terminals | IP20 |
| | | Weight | Approx. 240 g (packing included) |

Power supply specifications

Auxiliary power supply

H: 100 to 240 V ac/dc

Power consumption


 $\leq 1W, \leq 8VA$

Insulation (for 1 minute) between inputs and outputs


| | Measuring input | Digital or serial output | Digital input |
|--------------------------|-----------------|--------------------------|---------------|
| Measuring input | - | 4 kV | 4 kV |
| Digital or serial output | 4 kV | - | 0 kV |
| Digital input | 4 kV | 0 kV | - |

Accuracy (according to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

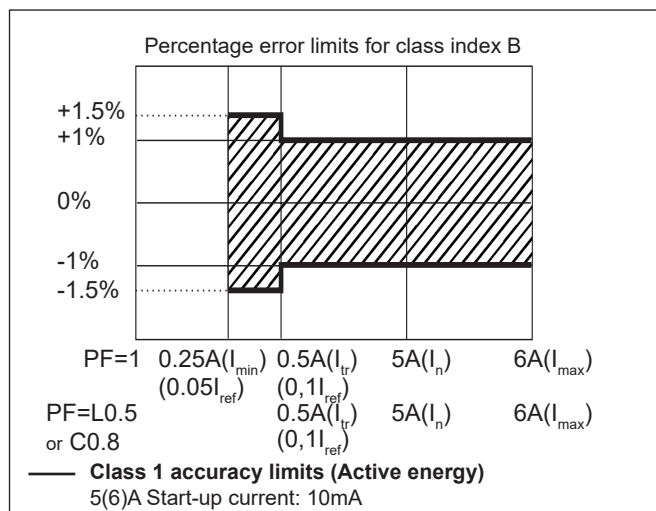

kvarh, accuracy (RDG) depending on the current

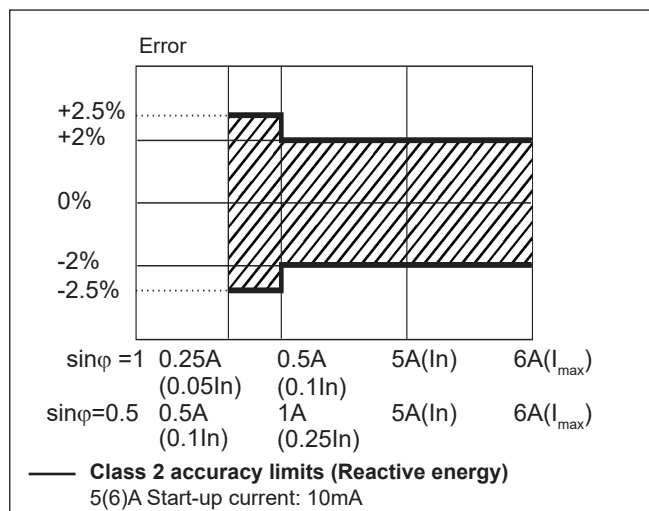

Display pages








| 1 st row | 2 nd row | 3 rd row | “Full” mode | “Easy” mode | Note |
|---------------------|---------------------|---------------------|-------------|-------------|---|
| kWh+ (imported) | | kW system | X | X | In case of Measurement set to “A”, total energy without considering the current direction. |
| kWh- (exported) | | kW system | X | X | Only with Measurement set to “B” |
| kWh+ (imported) | | V L-L system | X | X | |
| kWh+ (imported) | | V L-N system | X | X | |
| kWh+ (imported) | | PF system | X | | |
| kWh+ (imported) | | Hz | X | | |
| kvarh+ (imported) | | Kvar system | X | X | In case of Measurement set to “A”: total positive reactive energy without considering the current direction. |
| kvarh- (exported) | | Kvar system | X | X | Only with Measurement set to “B” |
| kWh+ (imported) | | kVA system | X | | |
| kWh+ (imported) | kWdmd peak | kWdmd | X | | |
| kWh (t1) | “t1” | kW system | X | X | Only relevant to kWh+, with Tariff menu set to ON. |
| kWh (t2) | “t2” | kW system | X | X | Only relevant to kWh+, with Tariff menu set to ON. |
| kWh L1 | kWh L2 | kWh L3 | X | | In case of Measurement set to “A”, total energy without considering the current direction. In case of Measurement set to “B”, only imported energy. |
| kVA L1 | kVA L2 | kVA L3 | X | | |
| kvar L1 | kvar L2 | kvar L3 | X | | |
| PF L1 | PF L2 | PF L3 | X | | |
| V L1-N | V L2-N | V L3-N | X | | |
| V L1-2 | V L2-3 | V L3-1 | X | | |
| run hour meter | | An | X | | |
| A L1 | A L2 | A L3 | X | X | |
| kW L1 | kW L2 | kW L3 | X | | |

X= available





Additional available information on the display

| Page | Display | Description |
|--------|-------------------------|---|
| Info 1 | YEAr (2015) | Year of production |
| Info 2 | SErIAL n (dddnnnA) | Serial number (ddd= day of the year; nnn=progressive number; A= production line, internal use only) |
| Info 3 | rEVIStion (A.01) | Firmware revision |
| Info 4 | PuLS LEd | Pulse rate of front LED (pulse/kWh) |
| P3 | SYStEM | System type |
| P4 | CT ratio | current transformer ratio |
| P5 | VT ratio | voltage transformer ratio |
| P6 | MEASurE (only X option) | Measurement type |
| P7 | InStALL | Wrong connection detection function |
| P8 | P Int | Integration time for Wdmd calculation |
| P9 | ModE | Set of variables on display |
| P10 | tArIFF | Tariff enabling (and current tariff if enabled) |
| P11 | HoME (only X option) | Selected home page |
| P12-1 | PuLSE (O1 option) | Selection of pulse ON duration of output |
| P12-2 | PuLrAtE (O1 option) | Selection of the pulse rate of output |
| P13 | PrI Add (M1 option) | M-bus primary address |
| P14 | AddrESS (S1 option) | Modbus serial address |
| P15 | bAud (M1 or S1) | M-bus or Modbus baud rate |
| P16-1 | PARItY (S1) | Modbus parity |
| P16-2 | StoP blt (S1) | Stop bit (in case of No parity only) |
| Info 5 | Secondary address (M1) | M-bus secondary address |


Wiring diagrams

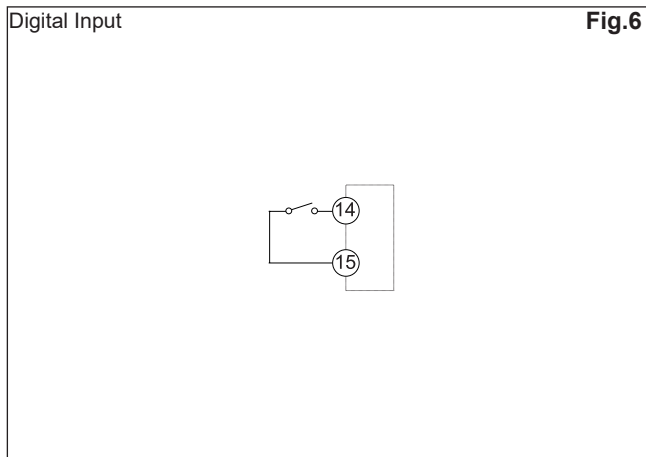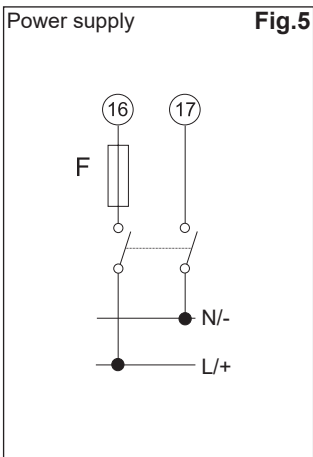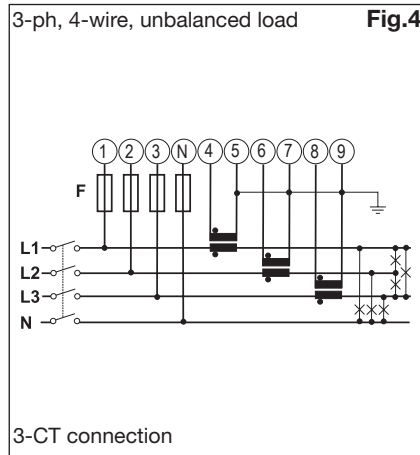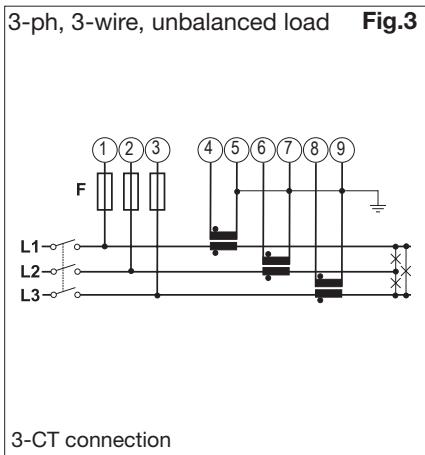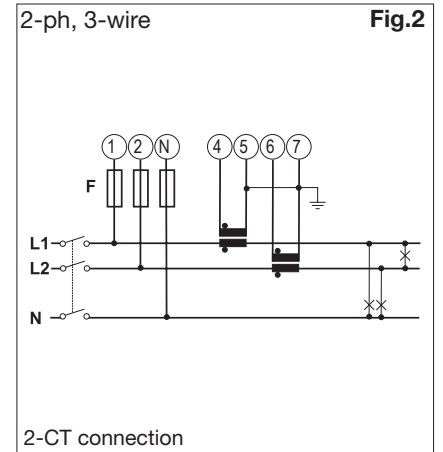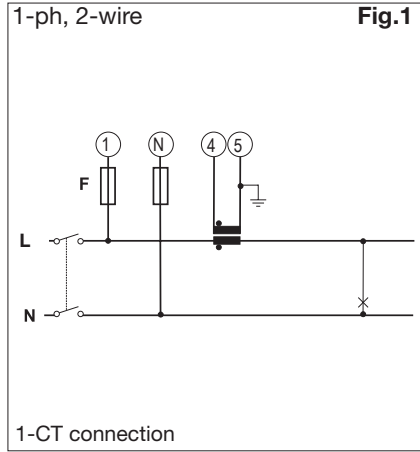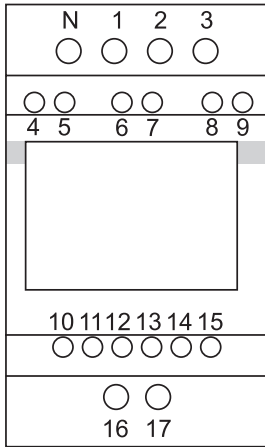

Wiring diagrams (cont.)

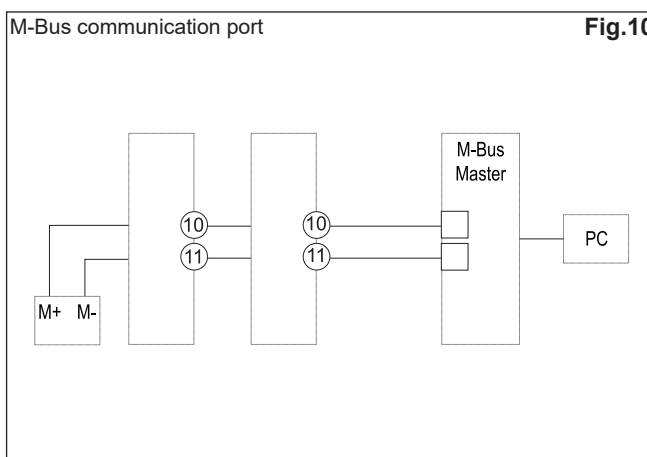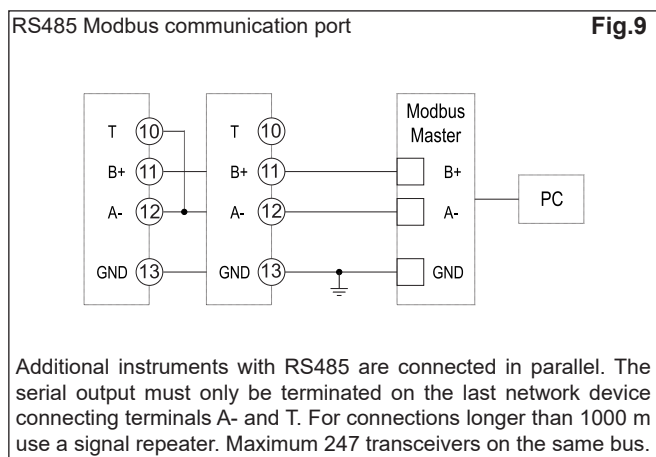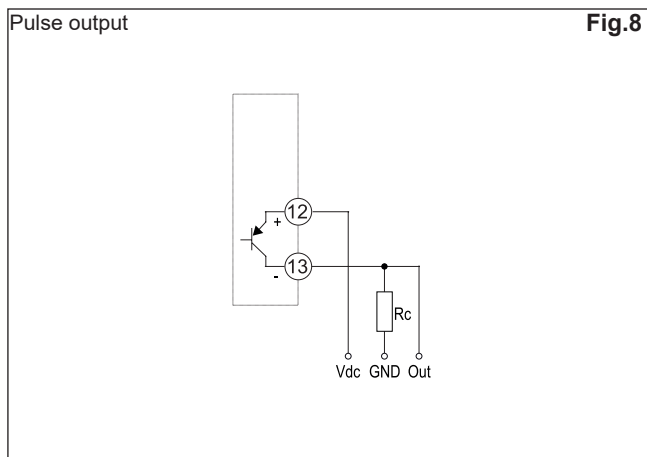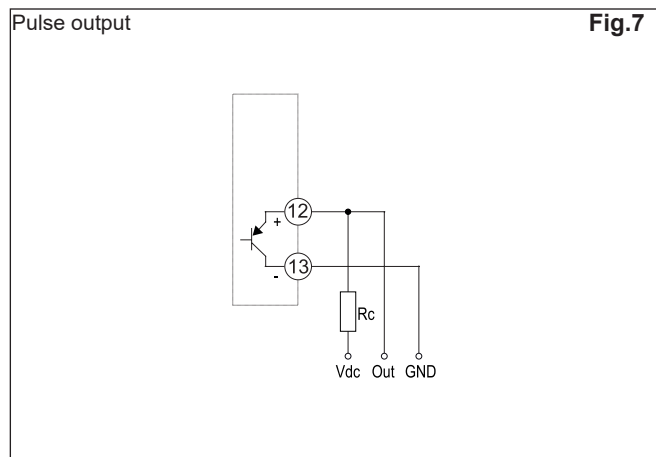


Front panel description

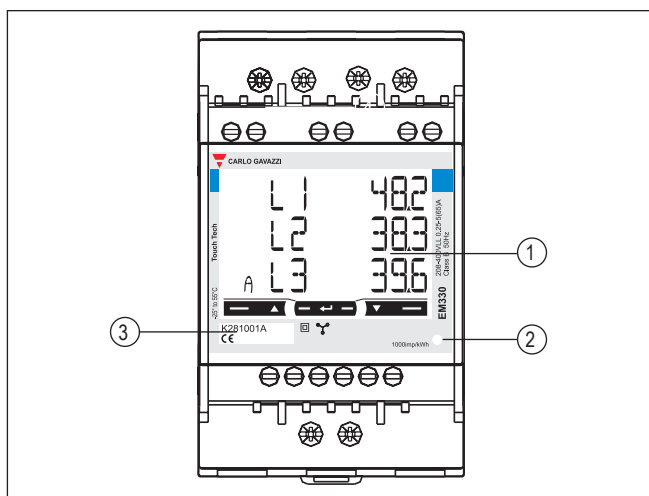

1. **Display**
Backlit LCD display with touch key-pad.
2. **LED**
LED proportional to kWh reading
3. **Serial number**
Area reserved to serial number and MID-relevant data in PF versions

Dimensions

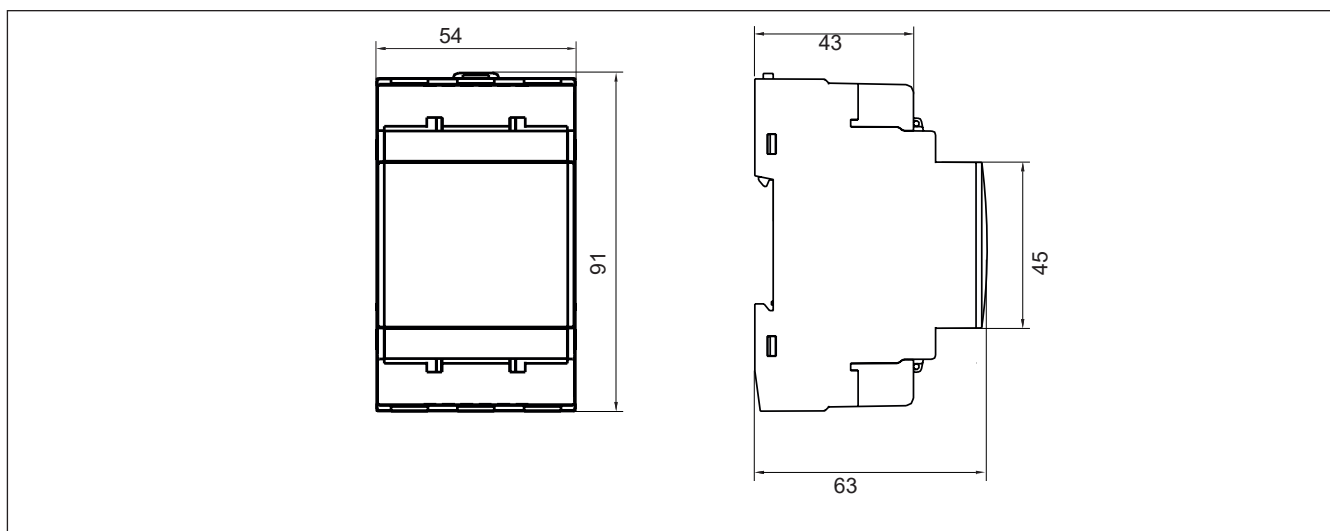

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [carlo gavazzi](#) manufacturer:

Other Similar products are found below :

[CTD10S16005AXXX](#) [CTD2X1005AXXX](#) [FPD01SBS200](#) [FPD06SCC200](#) [FPT01SBS200](#) [MP3100](#) [PD30CNG02NPM5RT](#)
[PD30CNP06NPM5DU](#) [PD30CNP06PPM5DU](#) [PH18CNT20PASA](#) [G21305521700](#) [G21960005700](#) [G34296470800](#) [G34304443115](#)
[G34396470115](#) [G34404443824](#) [G34960003700](#) [G38000016230](#) [G89111010](#) [GAD1213024](#) [GH34850000724](#) [GMS-63S-63A](#) [GP67630107](#)
[PPB01CM23N](#) [PPC01DM23](#) [PS21M-US11PR-M0L](#) [PS21R-NT11N7-YK0](#) [PS31L-NS11LS-M00](#) [GT225S100A](#) [GT400S400A](#) [GT63S18A](#)
[GT800S800A](#) [GT95L36A](#) [GT95L50A](#) [GT95L95A](#) [A208024060](#) [A82-10100](#) [RAP48A3](#) [AD2000](#) [RCP1100324DC](#) [RCP800224VDC](#)
[REC2R48D30GKE](#) [REC3B48A30GKE](#) [RGC1A60D62KGU](#) [RGC1FS60D30GGE](#) [RJ1A23D45E](#) [RJ1P23MBT50ECV](#) [RJ1P48V30E](#)
[DFC01DB48](#) [DHA51CM24S8](#)