


SD2DUG24



Dupline® bus generator

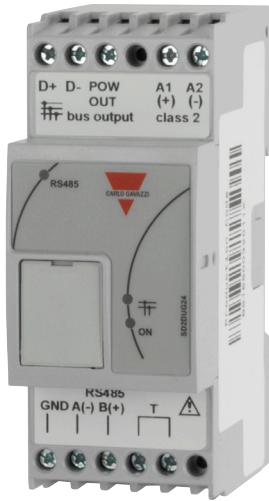

Benefits

- **Integrated system.** Dupline® is the brand name for Carlo Gavazzi's 2-wire and 3-wire bus system.
- **Cost reduction.** The use of a bus system is a proven way to reduce installation costs – especially when the distance between I/O points are extensive.
- **Fast and easy installation.** Completely free topology, no special cable required, no screen or twist. It can go for 10 km and even further with repeaters.
- **High noise immunity.** Can run next to power cables.
- **Scalability.** New modules can be progressively integrated into the system according to the application needs.
- **Modularity.** The system is composed by many modules, powered by the bus, so that each installation can be precisely and easily sized.

Description

SD2DUG24 is designed as a cost-effective Plug & Play solution for interfacing Dupline® I/O's to control systems. It performs three functions: Dupline® channel generator, power supply synchronization (enables 3-wire system with supply) and Modbus RS485 interface.

It is fully programmable via software and the software is free downloadable from Carlo Gavazzi website.

It substitutes the G34900000xxx and G34960005xxx modules.


Applications

Dupline® is a bus system that offers unique solutions for a wide range of applications in industrial automation, water distribution, energy management, railway systems and many other areas.

Main features

- Modbus-RTU slave interface
- Built-in 2 and 3-wire Dupline® Channel Generator
- Generates 8, 16, 24, 32, 40, 48, 56, 64, 96 and 128 channels
- All Dupline® protocols are supported
- LED-indications for supply, Dupline® carrier and RS485
- Formulas to scale the raw data read from the field
- Easy connection to the PC via a USB port

Structure

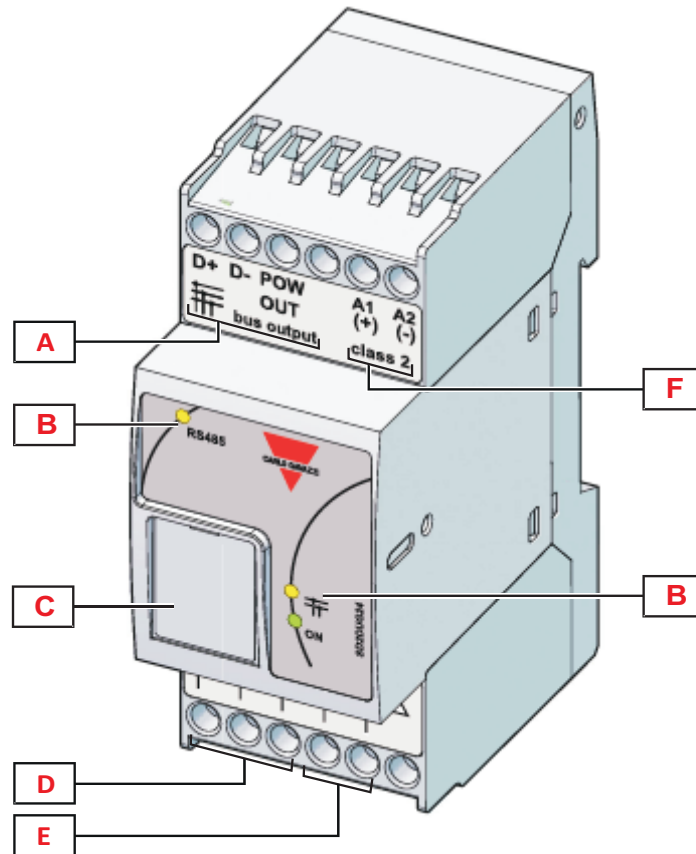


Element	Component	Function
A	Dupline bus	Connection to Dupline® modules
B	Information LED	Indicating the following status: Green LED: Power supply Yellow LEDs: Dupline® bus and communication
C	Micro-USB port	Connection to the USB port of the PC for programming
D	RS485	Modbus RS485 connection
E	RS485 termination	Termination for RS485
F	Power supply	Power supply connection block

Features

General

Material	Noryl
Dimensions	2-DIN module
Weight	150 g
Protection grade	Front: IP50; Screw terminal: IP20
Dielectric strength	Power supply to Dupline®: 500 V AC for 1 min. (IEC60664-1, TAB. A.1)
Terminal	12 screw-type; Section: 1.5 mm ² maximum; Torque: 0.4-0.8 Nm

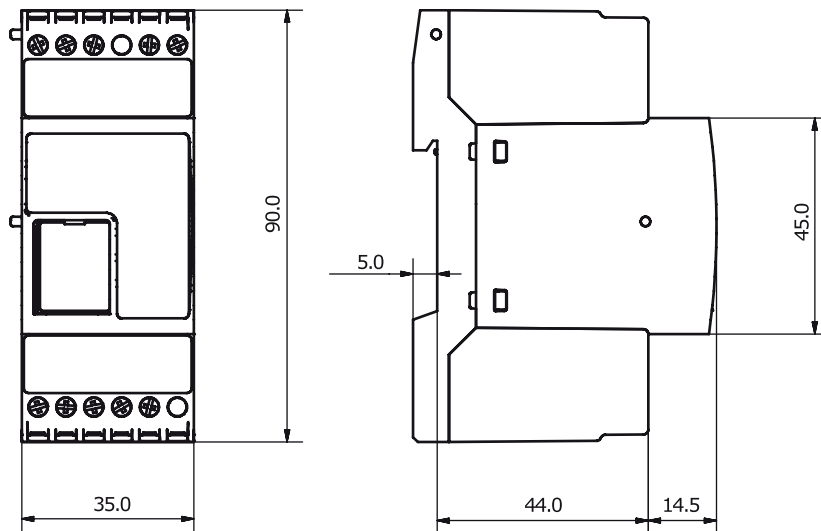

Environmental specifications

Operating temperature	-20° to +50°C (-4° to 122°F)
Storage temperature	-50° to +85°C (-58° to 185°F)
Humidity (non-condensing)	20 to 80% RH

Compatibility and conformity

Electromagnetic compatibility (EMC) - immunity	EN 61000-6-2
Electromagnetic compatibility (EMC) - emissions	EN 61000-6-3
Approvals	 

Power Supply

Power Supply	Overvoltage cat. II (IEC 60664-1, par. 4.3.3.2); Rated operational voltage: 15 to 24 VDC \pm 20% Note: No galvanic separation between power supply A1, A2 and power out. Use always separate power supplies for each SD2DUG24.
Operational voltage range	10 to 30 VDC (ripple included)
Rated operational power	6.5 W
Protection for reverse polarity	Yes
Connection	A1 (+) and A2 (-)
Power on delay	Typ. 4 s
Power off delay	1 s

Ports

Dupline®

Voltage	8.2 V \pm 10%
Maximum Dupline® current	130 mA 3-wire bus, max current on pow output 2.8 A, CL.2
Terminal	D+, D- and pow out, protected against reversal of connection and short circuit
Default number of Dupline® channel	128, outputs repeat inputs
Dupline® protocol supported	Split I/O, Double scan, Analink, 8-bit binary with and without multiplexer, 3 1/2 digit BDC with and without multiplexer, EM24: transmission of analogue data, transmission of counter values, transmission of alarms

RS485

Bus type	RS485
Protocol	Modbus slave
Connection	Terminals GND, A(-), B(+). T1, T2: termination inputs. They have to be short-circuited on the last module of the network. See wiring diagrams.
Data format	Selectable: 1 start bit, 7/8 data bit, no/odd/even/ parity, 1/2 stop bit
Baud rate	Selectable: 2400, 4800, 9600, 19200, 38400, 57600, 115200 bits/s
Modbus address	1 to 247
Default Modbus parameters	Address = 1, Speed = 9600, Data bits = 8, Parity = None, Stop bit = 1
Default USB address	0 and 1

USB

Type	High speed 2.0
Connections	"Micro A" type as "Device" function on the front of the housing protected by front cover

Connection Diagrams

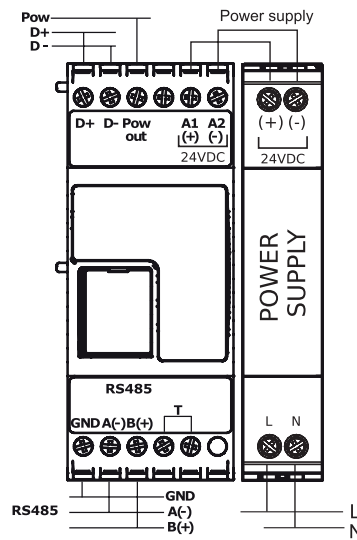


Fig. 1 Wiring diagram

Note: Terminals T, these two terminals must be short-circuited in the last module of the network.

References

Further reading

Information	Document	Where to find it
SD2DUG24 software manual	SD2DUG software manual	www.productselection.net/MANUALS/UK/SD2DUG_manual.pdf
SD2DUG24 software	Configuration software	
SD2DUG24 Modbus map	Modbus map	


Order code



SD2DUG24

CARLO GAVAZZI compatible components

Purpose	Component name/code	Notes
Substitution	G34900000xxx	
Substitution	G349600005xxx	



COPYRIGHT ©2015
Content subject to change. Download the PDF: www.productselection.net

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[8500-003](#) [IFD8520](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [OPT8AP-AE](#) [60006-016](#) [96RMKVM-19V1C-A](#) [60016-011](#)
[60016-014](#) [60006-008](#) [60016-015](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-](#)
[17V1C-A](#) [PCE-DP10-00A1E](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-019](#) [60006-009](#)
[60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-025](#) [60016-024](#) [60016-021](#) [60016-018](#) [60016-007](#) [60016-006](#) [60016-005](#)
[60016-004](#) [60007-002](#) [60006-018](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#)