


ENTRY LEVEL MODEL

conga-ELXeco

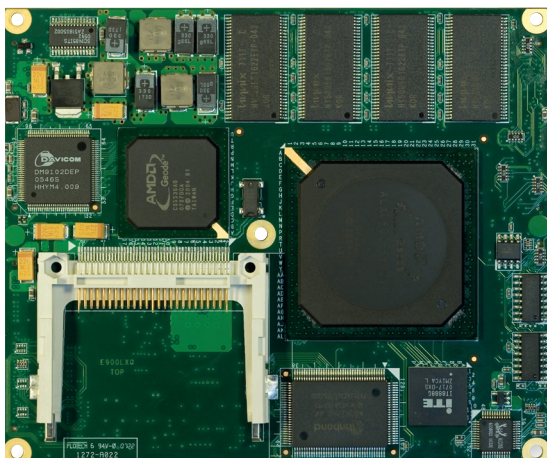


- Onboard DRAM
- ISA bus provided by PCI2ISA bridge
- Featuring AMD® Geode® LX800

ETX®

Formfactor	ETX® Spec 2.7
CPU	AMD Geode™ LX 800 Processor 400 MT/s memory bus speed 128 kByte L2 Cache
DRAM	Up to 256 MByte onboard DDR memory
Chipset	Companion Device: AMD Geode™ CS5536 Ethernet: Davicom DM9102D I/O Controller: Winbond 83627HG Audio Codec: ALC203
Ethernet	IEEE 802.3u 100Base-Tx Fast Ethernet compatible
I/O Interfaces	1x EIDE (UDMA-33) 1x CompactFlash Socket onboard 4x USB 2.0 (EHCI) PCI Bus Rev. 2.1 ISA Bus generated by PCI2ISA bridge I ² C (Fast Mode / 400 kHz / Multi Master) LPT (EPP/ECP) 2x COM Ports TTL Level x IrDA Port PS/2 Keyboard Mouse
Sound	AC'97 Rev.2.2 compatible Line In Line Out Mic In
Graphics	Integrated in chipset up to 254 MByte graphic memory (UMA)
Motion Video Support	H/W Up- and Downscaling High Definition digital video support alpha blending and color keying
Flat panel Interface	68 MHz LVDS Transmitter Automatic Panel Detection via EPI Embedded Panel Interface based on VESA EDID™ 1.3 1x18 Bit TFT resolutions 320x240 up to 1024x768
CRT Interface	350 MHz RAMDAC Resolutions up to 1920x1440x32bpp @ 85 Hz 1600x1200x32bpp @ 100 Hz
congatec Board Controller	Multi Stage Watchdog Non-volatile User Data Storage Manufacturing and Board information Board Statistics BIOS Setup Data Backup I ² C (Fast Mode / 400 kHz / Multi Master) Power Loss Control
Embedded BIOS Features	OEM Logo OEM CMOS Defaults LCD Control (Auto Detection / Backlight Control) Flash Update Based on Insyde XpressROM
Power Management	APM 1.2
Operating Systems	Microsoft® Windows CE 6.0 Microsoft® Windows XP Microsoft® Windows® embedded Standard Linux
Power Consumption	Typ. application 5W @ 5V see manual for full details CMOS Battery Backup
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.
Size	95 x 114 mm (3.7" x 4.5")

conga-ELXeco | Block diagram

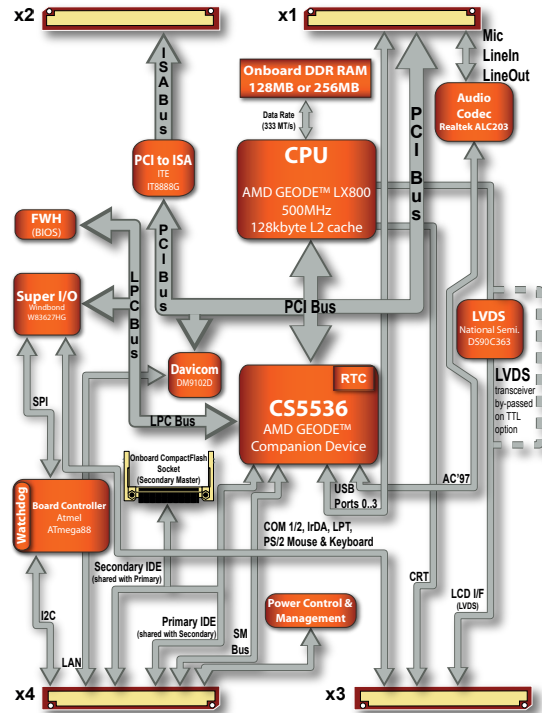

conga-ELXeco | Order Information

Article	PN	Description
conga-ELXeco-128-LVDS	078944	AMD Geode LX800 processor with 500MHz onboard 128MB RAM LVDS graphics interface 128kB L2 cache Companion Chip CS5536AD and ISA bus via PCI to ISA bridge
conga-ELXeco-256-LVDS	085431	AMD Geode LX800 processor with 500MHz onboard 256MB RAM LVDS graphics interface 128kB L2 cache Companion Chip CS5536AD and ISA bus via PCI to ISA bridge
conga-ELXeco-256-TTL	012247	AMD Geode LX800 processor with 500MHz onboard 256MB RAM TTL graphics interface (Advantech mapping) 128kB L2 cache Companion Chip CS5536AD and ISA bus via PCI to ISA bridge
conga-ELX/DD-HSP-B	045458	Heatspreader (Deep drawn stamped) for conga-ELX and ELXeco with 2.7mm bore hole
conga-ELX/DD-HSP-T	066558	Heatspreader (Deep drawn stamped) for conga-ELX and ELXeco with 2.5mm thread

Accessories

conga-EEVAL	033269	Evaluation carrier board for ETX-modules
conga-FPA2	047250	Flatpanel prototype adapter to develop your own flatpanel adapter Including cables set
XTX/ETX-carrierboard-socket-3	400006	Connector for ETX and XTX carrier boards height 3.0 mm packing unit 8 pieces
XTX/ETX-carrierboard-socket-9.5	400009	Connector for ETX and XTX carrier boards height 9.5 mm packing unit 8 pieces

© 2015 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. Dec 04, 2015 MR

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Computer-On-Modules - COM category](#):

Click to view products by [Congatec manufacturer](#):

Other Similar products are found below :

[FP2-BP12](#) [CEM881PG-i7-5650U](#) [t2Express-HL-i5-4402E](#) [34099-0000-99-2](#) [38017-0000-00-0](#) [36024-0000-99-1](#) [34099-0000-99-0](#) [36026-0000-99-1](#) [36026-0000-99-0](#) [38017-0000-00-5](#) [36016-4000-19-4](#) [VSTK-6ULL-NFC](#) [Express-SL-i7-6820EQ](#) [W612M3A600SC](#) [24828-10724571-309](#) [30846-682](#) [ET970K-X3G](#) [UPC-PLUSX5Q-A20-0464](#) [UPC-PLUSX7-A20-08128](#) [UPC-PLUSX5D-A20-0232](#) [UPC-PLUSX7-A20-0864](#) [UPX-WHLCR-A20-04064](#) [cExpress-BL-i5-5350U](#) [cExpress-KL-i3-7100U](#) [Express-BD7-D1539](#) [Express-CF-i5-8400H](#) [Express-HLE-i3-4100E](#) [Express-IBR-i7-R-3612QE](#) [LEC-BT4-4G-8G-ER](#) [nanoX-BT-E3825-2G/8G](#) [nanoX-BT-E3845-4G](#) [Q7-BT1-2G-8G-ER](#) [ROM-3310CS-MCA1E](#) [ROM-3310WS-MCA1E](#) [Evo M51](#) [EmNANO-a56M0-210HA](#) [EmQ-i2301-E3825](#) [EmQ-i2301-E3845](#) [EmQ-i2506](#) [G552BE](#) [CEM130-V1202B](#) [CEM700-D1508](#) [ET976-1807LV-4G](#) [ET976-1202-4G](#) [ET976-1605-4G](#) [ET976-1605LV-4G](#) [ET976-1605LV-8G](#) [ET976-1807LV-8G](#) [ET976-1202LV-E4G](#)