

## 7.5° 10 Watts 2 phases Part number made to order



- 48 steps/revolution (7.5°)
- Absorbed power : 10 W
- 2 or 4 phase versions available


### Part numbers

	Type	Type	Number of phases	Electronic controller used	Resistance per phase (Ω)	Inductance per phase (mH)	Current per phase (A)	Voltage at motor terminals (V)
82 930 002	2 phases	82 930 0 2		Bipolar	22.3	57	0,48	10,4

### Specifications

Absorbed power (W)	10
Holding torque (mNm)	180
Step angle (°)	7,5
Positioning accuracy (%)	5
Rotor inertia (gcm <sup>2</sup> )	84
Max. detent torque (mNm)	12
Max. coil temperature (°C)	120
Storage temperature (°C)	-40 → +80
Thermal resistance of coil - ambient air (°C/W)	7
Insulation resistance (at 500 Vcc) (MΩ) following NFC 51200 standard	> 10 <sup>3</sup>
Insulation voltage (50 Hz, 1 minute) (V) following NFC 51200 standard	> 600
Wires length (mm)	250
Weight (g)	340
Protection rating	IP40


### Dimensions (mm)

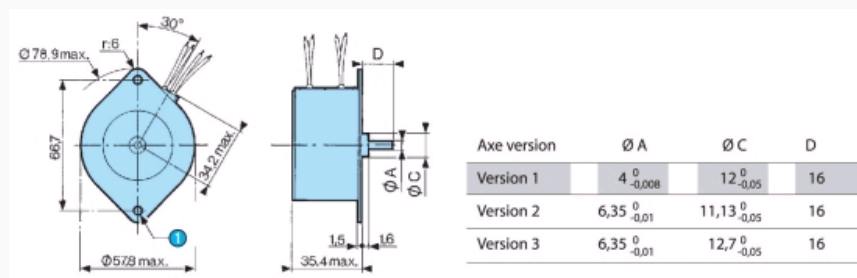

N°	Legend
①	2 Fixing holes Ø 4.4

### Curves

2 phases

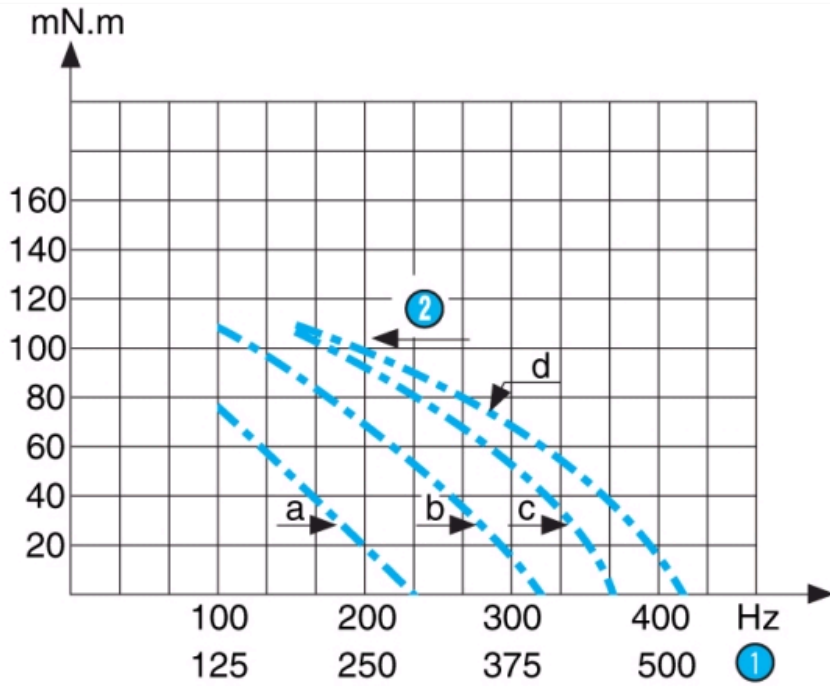


Inertia of measuring chain : 3.4 g.cm<sup>2</sup> a = constant voltage controller with Rs (resistance in series) = 0 b = constant voltage controller with Rs (resistance in series) = R motor c = constant voltage controller with Rs (resistance in series) = 2R motor d = constant voltage controller with Rs (resistance in series) = 3R motor The measurements are made with full stepping, 2-phases energised.

N°	Legend
1	RPM
2	Max. stopping-starting curves

**Curves**

2 phases - Max. stopping-starting and operating curves at 1 constant (PBL 3717) for 2 (motor) phases 9 Ω. Holding torque 150 mN.m. Current per phase 0.53 A

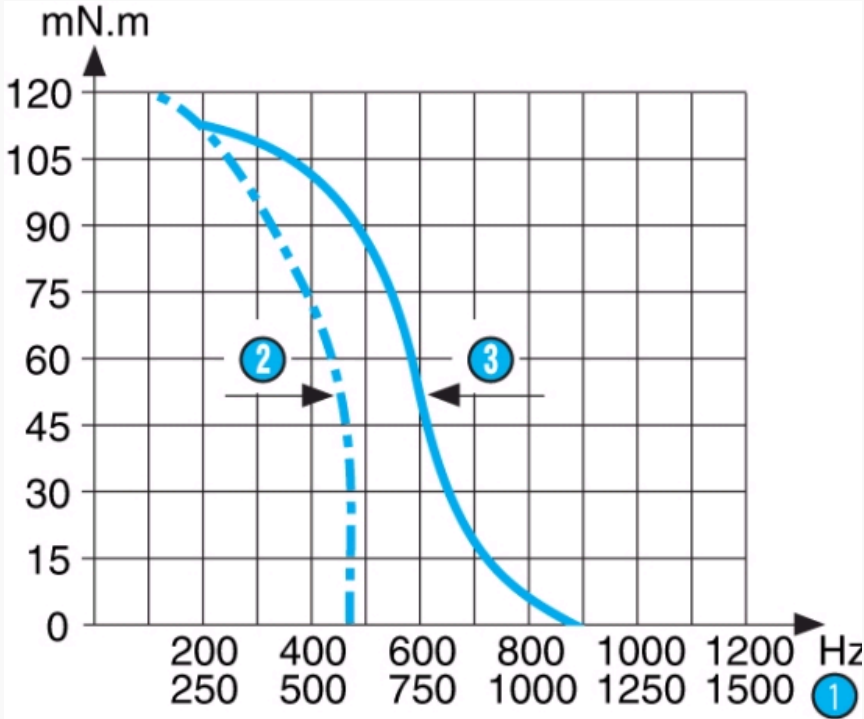


Inertia of measuring chain : 3.4 g.cm<sup>2</sup> a = constant voltage controller with Rs (resistance in series) = 0 b = constant voltage controller with Rs (resistance in series) = R motor c = constant voltage controller with Rs (resistance in series) = 2R motor d = constant voltage controller with Rs (resistance in series) = 3R motor The measurements are made with full stepping, 2-phases energised.

N°	Legend
1	RPM
2	Max. stopping-starting curves

**Curves**

Max. stopping-starting frequency curves as a function of the external inertia load at zero antagonistic torque. Tests at constant U.

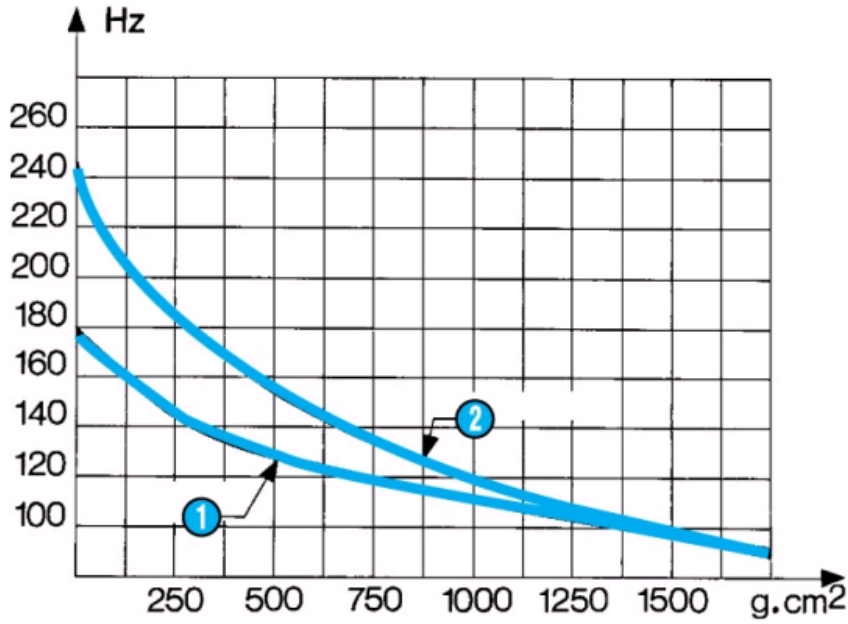


N.B. Measurement conditions : Tam = 25 °C, motor cold

N°	Legend
1	2 phases
2	4 phases

**Connections**

2 phases

	1	2	3	4
1	-	+	-	+
2	-	+	+	-
3	+	-	+	-
4	+	-	-	+
5	-	+	-	+

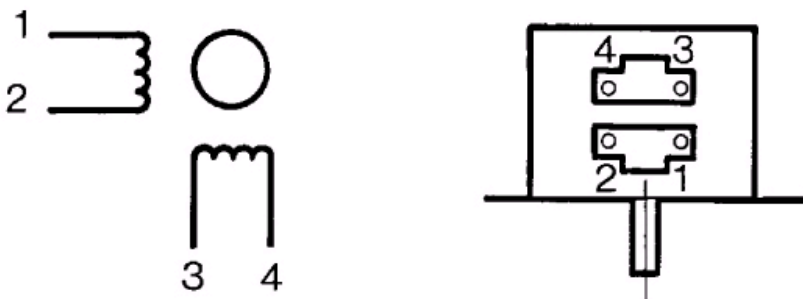

Energisation sequence for clockwise rotation : (viewed shaft end)

N°	Legend
----	--------



#### Product adaptations



- Special output shafts
- Special supply voltages
- Special cable lengths
- Special connectors

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Stepper Motors](#) category:*

*Click to view products by [Crouzet](#) manufacturer:*

Other Similar products are found below :

[HT17-275](#) [5014-020](#) [82924041](#) [82924036](#) [82914016](#) [80910502](#) [80910501](#) [80910003](#) [HT23-598](#) [HT08-221](#) [902-0135-000](#) [MS11HS3P4067-09RL](#) [MS17HD6P4200-24RL](#) [MS11HS5P4150-13RL](#) [MS08HY1P4050-09RL](#) [MS08HY3P4050-02RL](#) [ML24HCAL3550-01RL](#) [MS17HD6P4100-16RL](#) [ML23HS8P4220-16RL](#) [MS17HD2P4200-20RL](#) [ML23HSAL4500-E](#) [MS14HS5P4100-03RL](#) [MS17HD2P4100-27RL](#) [MS14HS1P4100-09RL](#) [MS11HS1P4100-25RL](#) [ML23HSAP4300-18RL](#) [ML23HS4P4100-02RL](#) [PL23HS8L4550-05RL](#) [MS17HD4P4150-22RL](#) [PM42S-048-HHC8](#) [PM20L-020-HHC3](#) [PM42L-048-HHC9](#) [82930002](#) [HT34-504](#) [82910003](#) [103H7126-0440](#) [103H8223-5141](#) [103H8223-6340](#) [103H7126-0740](#) [103H7126-5840](#) [103H8221-6240](#) [103H7126-5740](#) [103H7822-5740](#) [103H7823-5740](#) [103H8222-6340](#) [STEPPER MOTOR BIPOLAR 42X38MM 2.8V 1.7A](#) [SY20STH30-0604A](#) [STEPPER MOTOR: UNIPOLAR/BIPOLAR 57Å—56MM](#) [ROB-10551](#) [STEPPER MOTOR: UNIPOLAR/BIPOLAR 57Å—76MM](#)