

Phase control

→ EWS2

- Space savings, accurate measurement and optimized functions all improve the efficiency of your electrical installation
- Control : You simply install your EWS2 phase control relay and without any adjustment you can monitor the loss or inversion of one of the phases
- Safety : The EWS2 range enables you to choose the level of safety for your installation by using versions with 1, 2 or 3 output changeovers
- Self-powered : Simple to install, EWS2 control relays use the controlled mains supply for their own power supply voltage



Part numbers


Type	Output relay	Code
EWS2	2 changeovers	84 873 034

General characteristics

Input	
Operating range	3 x 230 → 3 x 400 V ~
Operating range	3 x 200 → 3 x 484 V ~
Frequency	50 / 60 Hz
Maximum consumption	28 VA
Output	
Output relay	2 changeovers
Type of contacts	No cadmium
Nominal rating	8 A
Maximum breaking voltage	250 V ~
Nominal breaking capacity	2 000 VA
Min. breaking current	10 mA / 5 V ---
Electrical life (number of operations)	10 ⁵ at 8A/250 V ~
Maximum rate (at full load)	360 operations / hour
Mechanical life (operations)	10 x 10 ⁶
Pick-up delay T1	≤ 650 ms
Turn-off delay T2	< 300 ms
Connection capacity - without ferrule	1 x 0.5 → 4 mm ² (AWG 20 → AWG 11) 2 x 0.5 → 2.5 mm ² (AWG 20 → AWG 14)
Connection capacity - with ferrule	1 x 0.5 → 2.5 mm ² (AWG 20 → AWG 14) 2 x 0.5 → 1.5 mm ² (AWG 20 → AWG 16)
Max. tightening torque (IEC/EN 60947-1)	0.6 → 1 Nm / 5.3 → 8.8 lbf.in
Environment	
Operating temperature range (°C)	-20 → +50
Storage temperature (°C)	-40 → +70
Housing material	Self-extinguishing
Protection (IEC/EN 60529) - Casing	IP40
Protection (IEC/EN 60529) - Term. block	IP20
Dielectric strength (IEC/EN 60255-5)	2.5 KV / 1 mn / 1 mA / 50 Hz
Insulation coordination (IEC/EN 60664-1)	Overvoltage category III, degree of pollution 3 : 4 KV / 3
Weight (g)	86


Dimensions (mm)

EWS / EWS2

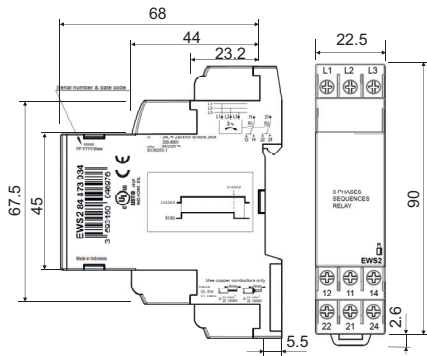


Connections

EWS2

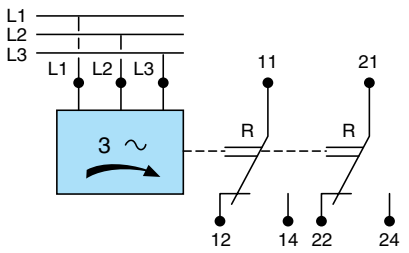

Principles

Timing diagrams EWS2

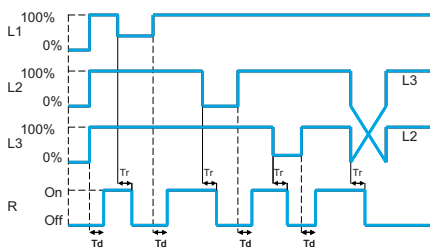

Td : Power on delay
 Tr : Responsible time after a fault has occurred
 R : Output relay

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Crouzet](#) manufacturer:

Other Similar products are found below :

[61FGPN8DAC120](#) [CV500SLK21](#) [70177-1011](#) [F03-03 HAS C](#) [F03-31](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [H2CRSAC110B](#)
[R88A-CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [AFP0RT32CT](#) [DRT2ID08C](#) [DTB4896VRE](#) [DTB9696CVE](#)
[DTB9696LVE](#) [E53-AZ01](#) [E53E01](#) [E53E8C](#) [E5C4Q40J999FAC120](#) [E5CWLQ1TCAC100240](#) [E5GNQ03PFLKACDC24](#) [B300LKL21](#)
[NSCXDC1V3](#) [NSH5-232CW-3M](#) [NT20SST122BV1](#) [NV-CN001](#) [OAS-160-N](#) [C40PEDRA](#) [K31S6](#) [K33-L1B](#) [K3MA-F](#) [100-240VAC](#)
[K3TX-AD31A](#) [89750101](#) [L595020](#) [SRM1-C02](#) [SRS2-1](#) [G32X-V2K](#) [26546803](#) [26546805](#) [PWRA440A](#) [CPM1AETL03CH](#) [CV500SLK11](#)
[3G2A5BI081](#) [3G2A5IA122](#) [3G2A5LK010E](#) [3G2A5OA223](#)