



(2,00 mm) .0787"

TW-20-07-T-D-550-SM

TW-25-02-F-S-260-SM

TW-10-04-L-D-300-SM

TW SERIES

SMT BOARD STACKERS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?TW-SM

Insulator Material: Black Liquid Crystal Polymer

Terminal Material: Phosphor Bronze

Plating: Sn or Au over 50µ" (1,27 µm) Ni

Current Rating: 4.9 A per pin (1 pin powered per row)

Operating Temp Range: -55°C to +105°C with Tin; -55°C to +125°C with Gold

RoHS Compliant: Yes

Processing: Lead-Free Solderable: Yes

SMT Lead Coplanarity: (0,15 mm) .006" max



Mates with:

CLT, SQT, SQW, ESQT, TLE, SMM, MMS, TCSD

OTHER SOLUTIONS

- Stacker height ranges and standard part numbers on double row.

Contact Samtec

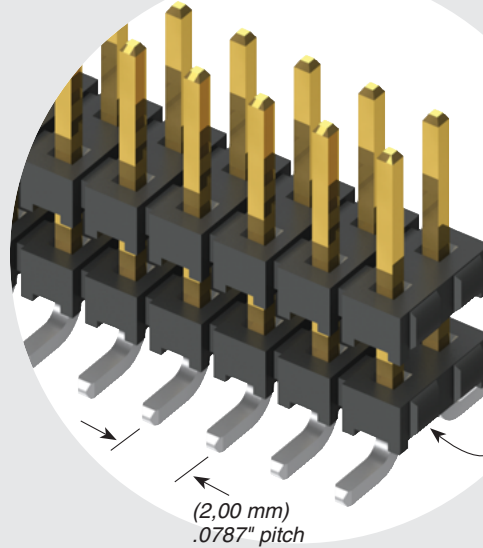

Available with optional Pick & Place Pads

Available with optional Alignment Pins

(2,00 mm) .0787" pitch

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Other platings
 - End shrouds with or without guide post
- Contact Samtec.

Note: For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.

Note: This Series is non-standard, non-returnable.

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	SM	OTHER OPTIONS
02 thru 36		Specify LEAD STYLE from chart below.	-F = Gold flash on post, Matte Tin on tail -L = 10µ" (0,25 µm) Gold on post, Matte Tin on tail -T = Matte Tin	-S = Single Row -D = Double Row	-"XXX" = Stacker Height in inches (0,13 mm) .005" increments Example: -250 = (6,35 mm) .250"		-"XXX" = Polarized Position -A = Alignment Pin (Metal or plastic at Samtec discretion) (4,83 mm) .190" min. board space (-D only) -P = Pick & Place Pad (1,91 mm) .075" min. post height (04-36 only) -TR = Tape & Reel Packaging (-07 lead style not available) (-06 lead style with -P option not available as a standard)

LEAD STYLE	OAL
-02	(7,85) .309
-03	(11,86) .467
-04	(12,37) .487
-06	(15,37) .605
-07	(17,35) .683
-09	(9,86) .388

ROW OPTION	A
-S	(5,08) .200
-D	(6,35) .250

Technical drawings include:

- Top view showing pin positions and dimensions: No. of positions x (2,00) .0787, (2,00) .0787, 36, 01, (2,00) .0787, 02, 72, (4,00) .1574, 01, (1,27) .050 TYP, 71, (0,51) .020 SQ, (0,00) .000 MIN, (1,27) .050, (1,50) .059, (2,00) .0787, STACKER HEIGHT OAL (4,32) .170 MIN.
- Side view showing dimensions: (5,33) .210, A, (1,27) .050, (1,09) .043 DIA.
- Lead style diagrams for -P OPTION and -A OPTION.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)