



ZIGBEE ADAPTERS
FOR SERIAL AND
USB DEVICES



DIGI XBEE-PRO ZIGBEE ADAPTERS

Easy-to-use adapters bring wireless connectivity to electronic devices in legacy wired applications

Digi XBee-PRO ZigBee adapters deliver wireless connectivity to electronic devices through advanced mesh networks. These adapters utilize the ZigBee PRO Feature Set, for robust self-healing, self-configuring networks. They are ideal for wirelessly enabling sensors, controllers and other devices in legacy wired applications, or where a common hardware interface is preferable.

Digi XBee-PRO ZigBee adapters can be battery or mains powered. They are available in a wide range of physical interfaces, including RS-485 and USB (power harvesting). Built upon Digi XBee-PRO modules, these adapters can be


purchased in a broad range of configurations and customized to meet your application needs.

Digi XBee adapters are compatible with ConnectPort® X gateways, Digi XBee® modules and Digi XBee accessories. This family of hardware, software and management tools provides users with unparalleled flexibility and end-to-end communication between devices.


BENEFITS

- Hardened design with extended operating temperature (-35° C to +74° C) for hazardous locations
- Class 1, Division 2 certified
- Multi-master/Multi-protocol concurrent support for Allen-Bradley and Modbus protocols
- Serial and Ethernet protocol bridging support for Allen-Bradley and Modbus protocols promotes interoperability
- ASCII to protocol translation for Allen-Bradley and Modbus
- Switch selectable RS-422/485 serial port

APPLICATION EXAMPLE

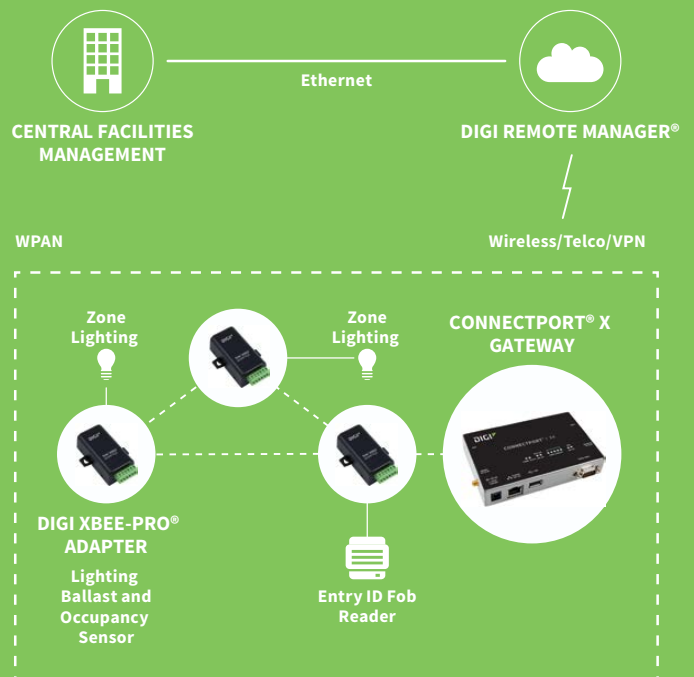

RELATED PRODUCTS

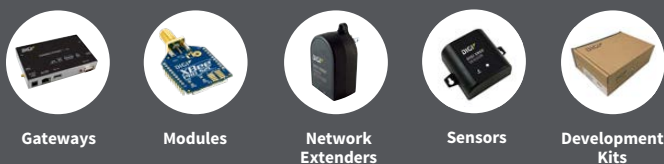

SPECIFICATIONS

Digi XBee-PRO® ZigBee Adapter

PERFORMANCE

RF DATA RATE	250 kbps
INDOOR/URBAN RANGE*	Up to 300 ft (90 m) / 200 ft (60 m) Int'l variant
OUTDOOR/RF LINE-OF-SIGHT RANGE*	Up to 2 miles (3200m) / 5000 ft (1500 m) Int'l variant
TRANSMIT POWER	63 mW (+18 dBm) / Int'l version
RECEIVER SENSITIVITY (1% PER)	-102 dBm

FEATURES

ANTENNA TYPE	USB models: internal wire antenna; RS-485 models: external RPSMA antenna
FREQUENCY BAND	2.4 GHz
SERIAL DATA INTERFACE	RS-485 (6-position wire terminal block) switch selectable between RS-422 half-duplex, RS-422 full duplex and RS-485
USB DATA INTERFACE	USB 2.0 Full Speed (with ESD protection); connects to host via captive 1-meter cable

NETWORKING & SECURITY

NETWORK TOPOLOGIES	Point-to-point, Point-to-multipoint, Mesh
NUMBER OF CHANNELS	14
SPREAD SPECTRUM TYPE	Direct Sequence Spread Spectrum
FILTRATION OPTIONS	PAN ID, 64-bit MAC, channel
ADDRESSING	65,000 available addresses for each channel

OTHER

LEDS	Power: Glows green when external power is supplied (not active when battery powered to limit power drain) Associate: Blinks when unit is connected and associated on an RF network
CONTROLS	Device reset (internal push button); Identification (internal push button) – relays ID to gateway
DIMENSIONS (L X W X H) & WEIGHT	RS-485 models: 3.60 in x 1.90 in x 1.20 in (9.14 cm x 4.82 cm x 3.04 cm) 2.29 oz (64.92 g) USB models: 2.87 in x 1.80 in x 0.83 in (7.29 cm x 4.57 cm x 2.10 cm) 1.60 oz (45.36 g)
OPERATING TEMPERATURE	-40° C to +70° C


POWER REQUIREMENTS

INPUT VOLTAGE	RS-485 models: 3.7-6VDC and 9-30 VDC USB models: Bus powered (+5V) USB Models: Bus Powered (+5V)
POWER CONSUMPTION	USB: 70 mA Rx and 250 mA Tx (normal operation) / 200 uA (suspend mode)

REGULATORY APPROVALS

EMISSIONS	FCC Part 15.247, IC, ETSI/CE, Telec, EN55022 (Class B)
SAFETY	CAN/CSA C22.2 No.60950
ROHS	Yes

*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

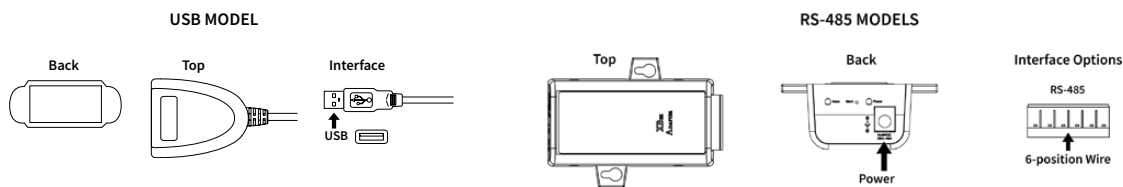

PART NUMBERS	DESCRIPTION
XA-Z14-CE1P-A	Digi XBee-PRO ZB USB adapter, internal wire antenna
XA-Z14-CS3PH-A	Digi XBee-PRO RS-485 adapter, external RPSMA antenna included (9 - 30V)

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2019 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001420
E8/619

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - Other Processors](#) category:

Click to view products by [Digi International](#) manufacturer:

Other Similar products are found below :

[EVB-MEC1418MECC](#) [20-101-1252](#) [CC-ACC-18M433](#) [STM8S/32-D/RAIS](#) [RTK0EN0001D01001BZ](#) [MAXQ622-KIT#](#)
[YR0K50571MS000BE](#) [QB-R5F104PJ-TB](#) [CC-ACC-ETHMX](#) [OV-7604-C7-EVALUATION-BOARD](#) [SK-AD02-D62Q1747TB](#) [SK-BS01-](#)
[D62Q1577TB](#) [ST7MDT1-EMU2](#) [GROVE BASE KIT FOR RASPBERRY PI](#) [CY3280-MBR3](#) [CY8CPROTO-062-4343W](#) [RASPBERRY PI](#)
[PICO](#) [EK-MPC5744P](#) [KITAURIXTC234TFTTOBO1](#) [QB-R5F104LE-TB](#) [ARTY S7-50](#) [BANANA PI GPIO EXTEND MODULE](#) [BPI](#)
[CAMERA](#) [HOLDER TYPE UNO](#) [USB POWER DELIVERY ANALYZER](#) [KAMODLVC](#) [KAMODPIC](#) [KAMODRPI PWRRELAY](#) [KA-](#)
[NUCLEO-WEATHER](#) [CAB/AB](#) [CAB/AR](#) [CAB/GR](#) [CAB/IDC10FF-30](#) [ZL4USB](#) [10-PIN SPLIT CABLE](#) [SK-GEN4-43D-PI](#) [SK-GEN4-](#)
[50D-PI](#) [SK-GEN4-70D-PI](#) [CHEETAH SPI HOST ADAPTER](#) [CMOD S6](#) [TINKERKIT - PRO](#) [W7500-EVB](#) [20-101-1253](#) [VS1003 SD CARD](#)
[MINI PLAYER](#) [ARDUINO MOTOR SHIELD REV3](#) [USB-ULIPO](#) [STM8/128-MCKIT](#) [UEXTX5](#) [CAB/HU06-30](#) [XTERM-01](#)