



ZIGBEE® RF MODULES
FOR OEMS



DIGI XBEE® AND DIGI XBEE-PRO® ZIGBEE

Embedded ZigBee modules provide OEMs with a simple way to integrate mesh technology into their application

Digi XBee and Digi XBee-PRO ZigBee RF modules provide cost-effective wireless connectivity to electronic devices. They are interoperable with other ZigBee PRO feature set devices, including devices from other vendors*.

Digi XBee and Digi XBee-PRO ZigBee modules are ideal for applications in the energy and controls markets where manufacturing efficiencies are critical. The Serial Peripheral Interface (SPI) provides a high-speed interface and optimizes integration with embedded microcontrollers, lowering development costs and reducing time to market.

Products in the Digi XBee family require little to no configuration or additional development. Programmable

versions of the Digi XBee and Digi XBee-PRO ZigBee module make customizing applications easy. Programming directly on the module eliminates the need for a separate processor. Because the wireless software is isolated, applications can be developed with no risk to RF performance or security.

Digi's ZigBee compatible module is based on the Ember EM35x (EM357 and EM3587) system on chip (SoC) radio ICs from SiliconLabs, utilizing 32-bit ARM Cortex™ M3 processor. The S2D EM3587 version has a larger memory footprint for customers who may want to upgrade to Thread, an IPv6 based networking stack.

*Interoperability requires the ZigBee Feature Set or ZigBee PRO Feature Set to be deployed on all devices. Contact Digi Support for details.

BENEFITS

- Programmable versions with on-board microprocessor enable custom ZigBee application development
- Through-Hole and Surface Mount form factors enable flexible design options
- Link budgets of 110 dB for Digi XBee and 119 dB for Digi XBee-PRO
- Industry-leading sleep current
- Firmware upgrades via UART, SPI or over the air (OTA)
- Thread updatable on the S2D EM3587 variant for maximum flexibility

RELATED PRODUCTS



Digi XBee
Gateways



Modules



Network
Extenders




Development
Kits



Digi Remote
Manager®

APPLICATION EXAMPLE

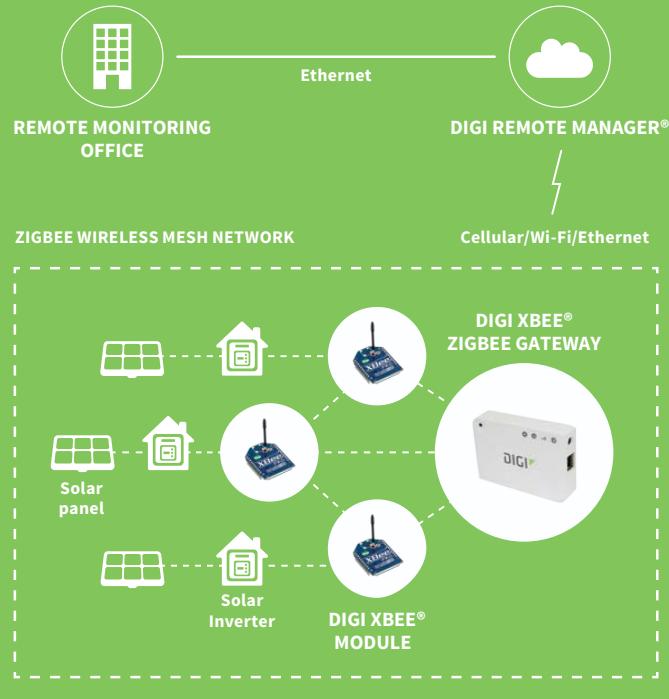

SPECIFICATIONS		Digi XBee® S2C ZigBee Standard Programmable	Digi XBee-PRO® S2C ZigBee Standard Programmable	Digi XBee® S2D ZigBee Thread Ready Standard		
PERFORMANCE						
TRANSCEIVER CHIPSET	Silicon Labs EM357 SoC		Silicon Labs EM3587 Soc			
DATA RATE	RF 250 Kbps, Serial up to 1 Mbps					
INDOOR/URBAN RANGE*	Up to 200 ft (60 m)		Up to 300 ft (90 m)			
OUTDOOR/RF LINE-OF-SIGHT RANGE*	Up to 4000 ft (1200 m)		Up to 2 miles (3200 m)			
TRANSMIT POWER	3.1 mW (+5 dBm) / 6.3 mW (+8 dBm) boost mode		63 mW (+18 dBm)			
RECEIVER SENSITIVITY (1% PER)	-100 dBm / -102 dBm boost mode		-101 dBm			
FEATURES						
SERIAL DATA INTERFACE	UART, SPI					
CONFIGURATION METHOD	API or AT commands, local or over-the-air (OTA)					
FREQUENCY BAND	ISM 2.4 GHz					
FORM FACTOR	Through-Hole, Surface Mount			Surface Mount		
INTERFERENCE IMMUNITY	DSSS (Direct Sequence Spread Spectrum)					
ADC INPUTS	(4) 10-bit ADC inputs					
DIGITAL I/O	15					
ANTENNA OPTIONS	Through-Hole: PCB Antenna, U.FL Connector, RPSMA Connector, or Integrated Wire SMT: RF Pad, PCB Antenna, or U.FL Connector					
OPERATING TEMPERATURE	-40° C to +85° C					
DIMENSIONS (L X W X H) AND WEIGHT	Through-Hole: 0.960 x 1.087 in (2.438 x 2.761 cm) SMT: 0.866 x 1.33 x 0.120 in (2.199 x 3.4 x 0.305 cm)		Through-Hole: 0.960 x 1.297 in (2.438 x 3.294 cm) SMT: 0.866 x 1.33 x 0.120 in (2.199 x 3.4 x 0.305 cm)			
PROGRAMMABILITY						
MEMORY	N/A	32 KB Flash / 2 KB RAM	N/A	32 KB Flash / 2 KB RAM		
CPU/CLOCK SPEED	N/A	HCS08 / up to 50.33 MHz	N/A	HCS08 / up to 50.33 MHz		
NETWORKING AND SECURITY						
PROTOCOL	ZigBee PRO 2007, HA-Ready with support for binding/multicasting					
ENCRYPTION	128-bit AES					
RELIABLE PACKET DELIVERY	Retries/Acknowledgements					
IDS	PAN ID and addresses, cluster IDs and endpoints (optional)					
CHANNELS	16 channels		15 channels			
POWER REQUIREMENTS						
SUPPLY VOLTAGE	2.1 to 3.6V		2.7 to 3.6V			
TRANSMIT CURRENT	33 mA @ 3.3 VDC / 45 mA boost mode	47 mA @ 3.3 VDC / 59 mA boost mode	120 mA @ 3.3 VDC	120 mA @ 3.3 VDC		
RECEIVE CURRENT	28 mA @ 3.3 VDC / 31 mA boost mode	42 mA @ 3.3 VDC / 45 mA boost mode	31 mA @ 3.3 VDC	45 mA @ 3.3 VDC		
POWER-DOWN CURRENT	<1 µA @ 25° C	1.5 µA @ 25° C	<1 µA @ 25° C	1.5 µA @ 25° C		
REGULATORY APPROVALS						
FCC, IC (NORTH AMERICA)	Yes		Yes			
ETSI (EUROPE)	Yes		No			
RCM (AUSTRALIA AND NEW ZEALAND)	Yes		Yes			
	No (Coming Soon)					

*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

PART NUMBERS	DESCRIPTION
S2C MODULES	
XB24CZ7PIT-004	Digi XBee ZigBee Through-Hole, PCB Antenna
XB24CZ7WIT-004	Digi XBee ZigBee Through-Hole, Wire Antenna
XB24CZ7UIT-004	Digi XBee ZigBee Through-Hole, U.FL
XB24CZ7SIT-004	Digi XBee ZigBee Through-Hole, RPSMA
XB24CZ7PITB003	Programmable Digi XBee ZigBee Through-Hole, PCB Antenna
XB24CZ7WITB003	Programmable Digi XBee ZigBee Through-Hole, Wire Antenna
XB24CZ7UITB003	Programmable Digi XBee ZigBee Through-Hole, U.FL
XB24CZ7SITB003	Programmable Digi XBee ZigBee Through-Hole, RPSMA
XB24CZ7PIS-004	Digi XBee ZigBee SMT, PCB Antenna
XB24CZ7RIS-004	Digi XBee ZigBee SMT, RF Pad
XB24CZ7UIS-004	Digi XBee ZigBee SMT, U.FL
XB24CZ7PISB003	Programmable Digi XBee ZigBee SMT, PCB Antenna
XB24CZ7RISB003	Programmable Digi XBee ZigBee SMT, RF Pad
XB24CZ7UISB003	Programmable Digi XBee ZigBee SMT, U.FL
XBP24CZ7PIT-004	Digi XBee-PRO ZigBee Through-Hole, PCB Antenna
XBP24CZ7WIT-004	Digi XBee-PRO ZigBee Through-Hole, Wire Antenna
XBP24CZ7UIT-004	Digi XBee-PRO ZigBee Through-Hole, U.FL
XBP24CZ7SIT-004	Digi XBee-PRO ZigBee Through-Hole, RPSMA
XBP24CZ7PITB003	Programmable Digi XBee-PRO ZigBee Through-Hole, PCB Antenna
XBP24CZ7WITB003	Programmable Digi XBee-PRO ZigBee Through-Hole, U.FL
XBP24CZ7SITB003	Programmable Digi XBee-PRO ZigBee Through-Hole, RPSMA
XBP24CZ7PIS-004	Digi XBee-PRO ZigBee SMT, PCB Antenna
XBP24CZ7RIS-004	Digi XBee-PRO ZigBee SMT, RF Pad
XBP24CZ7UIS-004	Digi XBee-PRO ZigBee SMT, U.FL
XBP24CZ7PISB003	Programmable Digi XBee-PRO ZigBee SMT, PCB Antenna
XBP24CZ7RISB003	Programmable Digi XBee-PRO ZigBee SMT, RF Pad
XBP24CZ7UISB003	Programmable Digi XBee-PRO ZigBee SMT, U.FL
S2D MODULES	
XB24DZ7PIS-004	Digi XBee ZigBee – Thread Ready SMT, PCB Antenna
XB24DZ7RIS-004	Digi XBee ZigBee – Thread Ready SMT, RF Pad Antenna
XB24DZ7UIS-004	Digi XBee ZigBee – Thread Ready SMT, U.FL Antenna
S2C KIT	
XKB2-Z7T-WZM	Digi XBee ZigBee Mesh Kit, worldwide
S2D KIT	
XKB2-Z7T-WTZM	Digi XBee ZigBee Mesh Kit, worldwide

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2018 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91002937
B7/518

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Zigbee Development Tools - 802.15.4 category:

Click to view products by Digi International manufacturer:

Other Similar products are found below :

[EVAL_PAN4555ETU](#) [4467CPCE10D868](#) [STEVAL-IFS013V2](#) [DFR0015](#) [DFR0050](#) [WRL-14549](#) [BOB-13311](#) [ATRCB256RFR2-XPRO](#)
[ATREB212BSMA-EK](#) [ATREB231ED-EK](#) [ATREB233-XPRO](#) [ATZB-A-233-XPRO](#) [ATZB-X-212B-USB](#) [ATZB-X-233-XPRO](#) [76000956](#)
[XK-WDM](#) [IS.OMB-001](#) [DM182016-1](#) [MIKROE-4277](#) [MIKROE-1599](#) [MIKROE-290](#) [MIKROE-987](#) [FRDM-KW41Z](#) [113020004](#) [EM35X-](#)
[BBRD](#) [RBK-ZW500-E2](#) [RBK-ZW500-H2](#) [RBK-ZW500-U2](#) [RD-0039-0201](#) [RFX2411N-EVB](#) [WRL-11373](#) [WRL-11812](#) [WRL-12847](#)
[SKY66114-11-EK1](#) [SKY66403-11EK1](#) [SKY66112-11EK1](#) [XB24-DKS](#) [XB24-DKS-INT](#) [XB24-DKSJ](#) [XB24-DMDK](#) [XB24-DMDK-WJ](#)
[XB24-PDKJ](#) [XBEE-MP-MCRO](#) [XBEE-MP-SMT](#) [XBEE-MP-TH](#) [XBIB-CU-TH](#) [XBP09-DMDK](#) [XBP24-DKS](#) [XK8-DMSB0](#) [XKA2C-Z7T-](#)
U