

Analog Discovery Pro 5000 Series Datasheet

All-in-One Mixed Signal Oscilloscope, Function Generator, Power Supply, and DMM



Highlighted Features

- USB-based Mixed Signal Oscilloscopes
- Options for two or four analog input channels, with sample rates and bandwidths from 1 to 2 GS/s and 100 to 500 MHz
- 34 digital inputs at 1 GS/s
- Digital Multimeter supporting CAT II measurements
- Three programmable power supplies
- An analog output with up to 40 MHz bandwidth
- Bode plot, FFT, impedance analyzer, and more
- Extensive software support with WaveForms, WaveForms SDK, and LabVIEW

Overview

The Analog Discovery Pro 5000 Series devices, the ADP5250, ADP5470, and ADP5490, are Digilent's most ambitious mixed signal oscilloscopes to date, bringing higher sample rates, wider bandwidth, and more power to your benchtop.

Classifying the three ADP5000 devices as 'just' mixed signal oscilloscopes would be doing them a disservice. Each product sports an integrated CAT II Digital Multimeter, three programmable power supplies, a dedicated trigger line, and arbitrary waveform generator to complement the mixed signal oscilloscope. With 34 digital inputs operating at 1 GS/s working in tandem with the analog system, the rugged 5000 Series devices provide a range of bandwidths and sample rates for analog inputs to fit your needs – from a base of 100 MHz at 1 GS/s, to 350 MHz at 1.5 GS/s, all the way up to 500 MHz at 2 GS/s.

Driven by Digilent's free WaveForms software and with everything included with a one-time purchase of the hardware, the Analog Discovery Pro 5000 Series is more than just a tool – it's analysis uncompromised.

1 Features

Analog Inputs

- Analog Discovery Pro 5250
 - Two BNC input channels with 8-bit resolution with up to ± 20 V input range
 - 100 MHz bandwidth, aggregate 1 GS/s
- Analog Discovery Pro 5470
 - Four BNC input channels with 8-bit resolution with up to ± 20 V input range
 - 350 MHz bandwidth, 1.5 GS/s per channel
- Analog Discovery Pro 5490
 - Four BNC input channels with 8-bit resolution with up to ± 20 V input range
 - 500 MHz bandwidth, 2 GS/s per channel

Analog Output

- One BNC output channel with 14-bit resolution, ± 12 V output range
- Analog Discovery Pro 5250 and 5470
 - 20 MHz bandwidth, up to 125 MS/s
- Analog Discovery Pro 5490
 - 40 MHz bandwidth, up to 200 MS/s

Logic Analyzer

- 34 digital inputs with configurable voltage threshold
- Up to 1 GS/s per channel

Power Supplies

- Three programmable power supplies (0 V to 6 V, 0 V to 25 V, 0 V to -25 V)
- Analog Discovery Pro 5250
 - Up to 1 A output on the 6 V rail, up to 500 mA each on the ± 25 V rails
- Analog Discovery Pro 5470 and 5490
 - Up to 3 A output on the 6 V rail, up to 1 A each on the ± 25 V rails
- Integrated hardware readback of voltage and current output for each rail

Additional Features

- Integrated CAT II Digital Multimeter
- Triggering and cross triggering between instruments

Software Support


- Digilent's WaveForms software on Windows
- WaveForms SDK for custom applications and scripting through C/C++, Python, C#, Visual Basic
- LabVIEW support

Comparison Chart

What do you need?		ADP5250	ADP5470	ADP5490
High Sample Rate and Bandwidth?	500 MS/s and 100 MHz across 2 channels	●	●	●
	1.5 GS/s and 350 MHz for all 4 channels		●	●
	2 GS/s and 500 MHz for all 4 channels			●
34 Digital Inputs operating at up to 1 GS/s?		●	●	●
Bode plot, FFT, and Impedance Analyzers?		●	●	●
DMM supporting CAT II measurements?		●	●	●
Arbitrary Waveform Generator?	20 MHz bandwidth for sine, square and ramp signals, and custom waveforms?	●	●	●
	40 MHz bandwidth for sine, square and ramp signals, and custom waveforms?			●
Multiple programmable power supplies?	6 V – 1 A, +25 V – 500 mA, -25 V – 500 mA	●	●	●
	6 V – 3 A, +25 V – 1 A, -25 V – 1 A		●	●
To have everything from the Scope Probes to software to functionality to product support included in a single one-time price?		●	●	●

Callout Diagrams

Analog Discovery Pro (ADP5250)

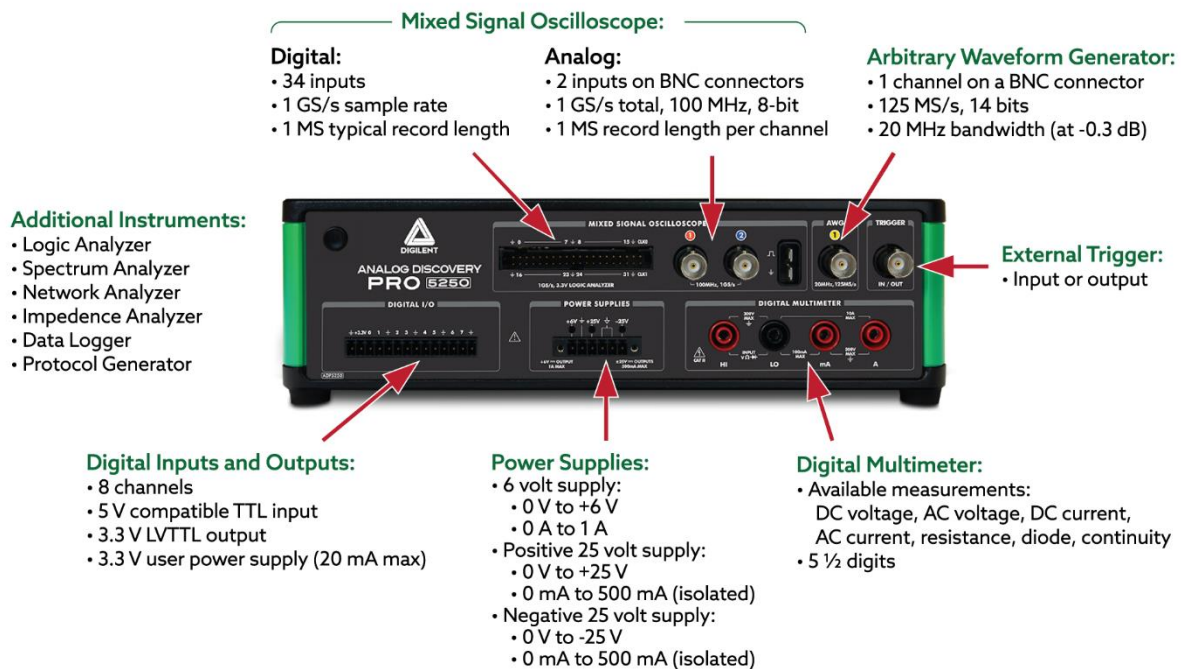


Analog Discovery Pro (ADP5470)

Mixed Signal Oscilloscope:

<p>Digital:</p> <ul style="list-style-type: none"> • 34 inputs • 1 GS/s sample rate • 1 MS typical record length 	<p>Analog:</p> <ul style="list-style-type: none"> • 4 inputs on BNC connectors • 1.5 GS/s total, 350 MHz, 8-bit • 1 MS record length per channel 	<p>Arbitrary Waveform Generator:</p> <ul style="list-style-type: none"> • 1 channel on a BNC connector • 125 MS/s, 14 bits • 20 MHz bandwidth (at -0.3 dB)
--	--	--

Additional Instruments:

- Logic Analyzer
- Spectrum Analyzer
- Network Analyzer
- Impedance Analyzer
- Data Logger
- Protocol Generator



External Trigger:

- Input or output

Digital Inputs and Outputs:

- 8 channels
- 5 V compatible TTL input
- 3.3 V LVTTTL output
- 3.3 V user power supply (20 mA max)

Power Supplies:

- 6 volt supply:
 - 0 V to +6 V
 - 0 A to 3 A
- Positive 25 volt supply:
 - 0 V to +25 V
 - 0 A to 1 A (isolated)
- Negative 25 volt supply:
 - 0 V to -25 V
 - 0 A to 1 A (isolated)

Digital Multimeter:

- Available measurements:
 - DC voltage, AC voltage, DC current, AC current, resistance, diode, continuity
- 5 ½ digits


Analog Discovery Pro (ADP5490)

Mixed Signal Oscilloscope:

<p>Digital:</p> <ul style="list-style-type: none"> • 34 inputs • 1 GS/s sample rate • 1 MS typical record length 	<p>Analog:</p> <ul style="list-style-type: none"> • 4 inputs on BNC connectors • 2 GS/s total, 500 MHz, 8-bit • 1 MS record length per channel 	<p>Arbitrary Waveform Generator:</p> <ul style="list-style-type: none"> • 1 channel on a BNC connector • 200 MS/s, 14 bits • 40 MHz bandwidth (at -0.3 dB)
--	--	--

Additional Instruments:

- Logic Analyzer
- Spectrum Analyzer
- Network Analyzer
- Impedance Analyzer
- Data Logger
- Protocol Generator



External Trigger:

- Input or output

Digital Inputs and Outputs:

- 8 channels
- 5 V compatible TTL input
- 3.3 V LVTTTL output
- 3.3 V user power supply (20 mA max)

Power Supplies:

- 6 volt supply:
 - 0 V to +6 V
 - 0 A to 3 A
- Positive 25 volt supply:
 - 0 V to +25 V
 - 0 A to 1 A (isolated)
- Negative 25 volt supply:
 - 0 V to -25 V
 - 0 A to 1 A (isolated)

Digital Multimeter:

- Available measurements:
 - DC voltage, AC voltage, DC current, AC current, resistance, diode, continuity
- 5 ½ digits

2 WaveForms Software


Digilent's WaveForms software offers a unified device experience across all our Test and Measurement devices, enabling use of all hardware features and instruments. It features a friendly user interface that has the feel of traditional benchtop devices. WaveForms makes it easy to acquire, visualize, analyze, produce, and reuse both analog and digital signals simultaneously.

For even more customization potential, the WaveForms Software Development Kit (SDK) can be used to create custom applications and scripts to control the T&M device in Python, C, and additional languages.

The Analog Discovery Pro 5000 Series is compatible with the Windows version of WaveForms.


2.1 Oscilloscope

The Oscilloscope instrument captures analog input data via the analog input scope channels. When this instrument is used, each of the Analog Discovery Pro 5000 Series analog input channels act as an 8-bit oscilloscope, providing up to 500 MHz of bandwidth at 2 GS/s with the ADP5490. Multiple triggering modes are supported.

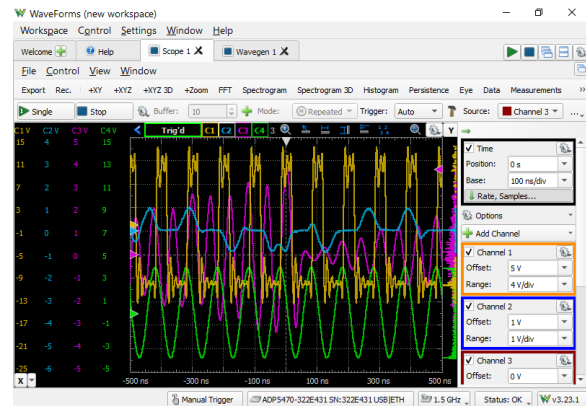


2.2 Waveform Generator

The Waveform Generator instrument can output analog voltage waveforms. The Analog Discovery Pro 5000 Series devices support simple waveforms like Sine and Triangle waves as well as custom sets of samples can be defined by the user in applications like Excel and imported to WaveForms.

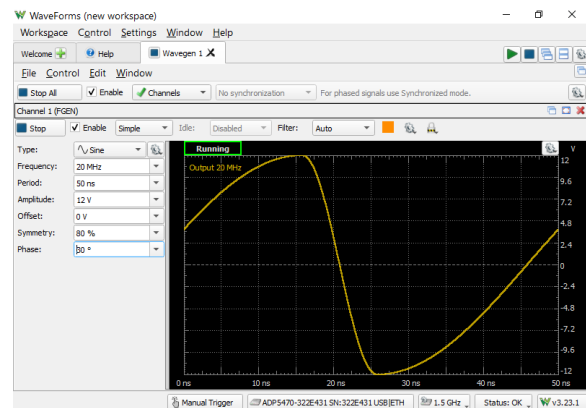


2.3 Power Supplies

The Analog Discovery Pro 5000 Series have three variable power supply rails that can be used to power circuits under test – a 0 to 6 V rail, a 0 V to 25 V rail, and a 0 V to -25 V rail. The ADP5250 can supply up to 1 A on the 6 V rail and 500 mA on each ± 25 V rail. The ADP5470 and ADP5490 can supply 3 A on the 6 V rail and 1 A on each ± 25 V rail.

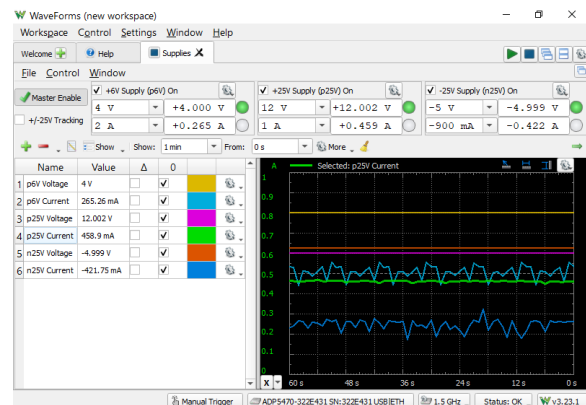


2.4 Digital Multimeter

All three of the Analog Discovery Pro 5000 Series devices have a dedicated CAT II DMM, letting users measure voltage, current, resistance, continuity, and more within a single instrument.

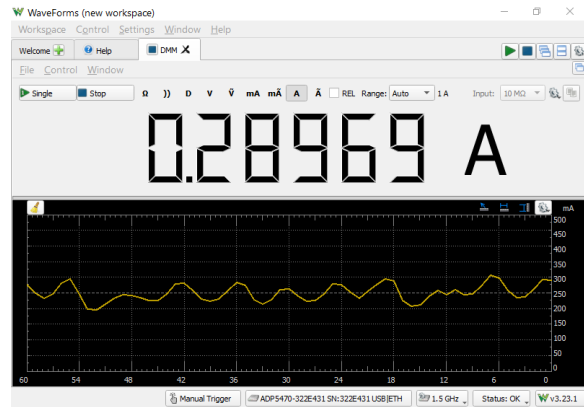

2.5 Data Logger


The Data Logger instrument can capture large buffers of analog input data on the Scope pins. The Data Logger can capture up to 10 million samples at a defined update rate ranging from 10 Hz to once an hour.

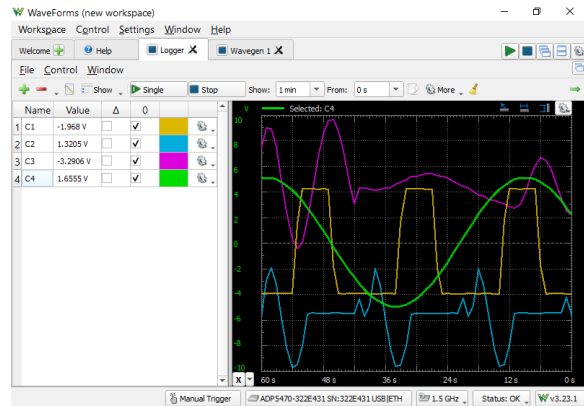

2.6 Logic Analyzer


With the Logic Analyzer, the 34 digital input channels are equipped to capture digital data at up to 1 GS/s. With a user configurable threshold of 0 V to 2 V, numerous logic standards are supported up to 5 V TTL.

Individual input/output channels can be grouped as buses and protocols. Protocol groups can be used to view the decoded contents of packets of many common communications protocols, including SPI, I2C, UART, CAN, and I2S.

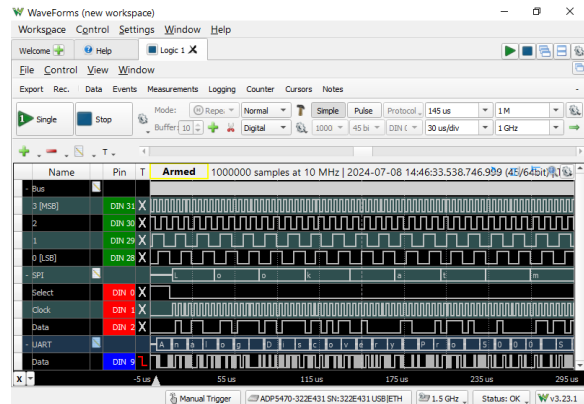


2.7 Static I/O

The Static I/O instrument can emulate a variety of user input/output devices on the eight dedicated digital input/output pins. Virtual LEDs, buttons, switches, sliders, and displays can be assigned to specific digital I/O pins and interacted with within the WaveForms user interface.

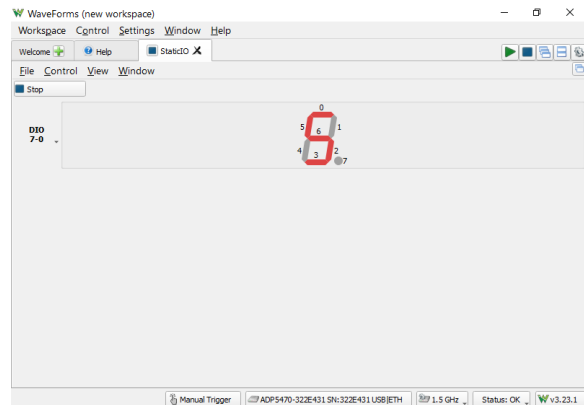


2.8 Spectrum Analyzer

The Spectrum Analyzer instrument is used to view the power of frequency-domain components of analog signals captured on the analog input channels. Cursors and automatic measurements include noise floor, SFDR, SNR, THD and more.

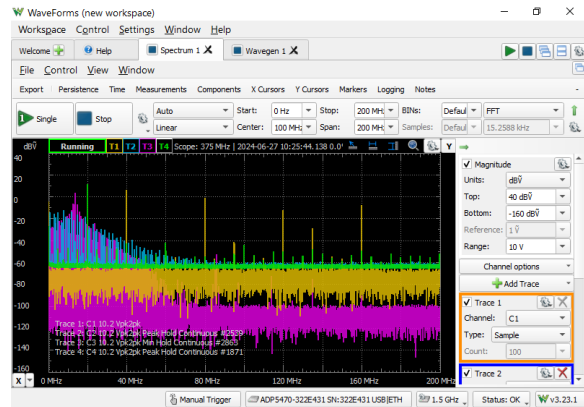


2.9 Network Analyzer

The Network Analyzer instrument can be used to view the amplitude and phase response of a circuit under test. Bode, Nichols, and Nyquist plots can also be viewed with this instrument. The Network Analyzer instrument uses the analog output and analog input channels of the Analog Discovery Pro 5000 Series device to probe a test circuit, by generating a frequency sweep and measuring the circuit's response. The Network Analyzer can be configured to use an external signal to provide input to the circuit under test, rather than using the analog output channel.

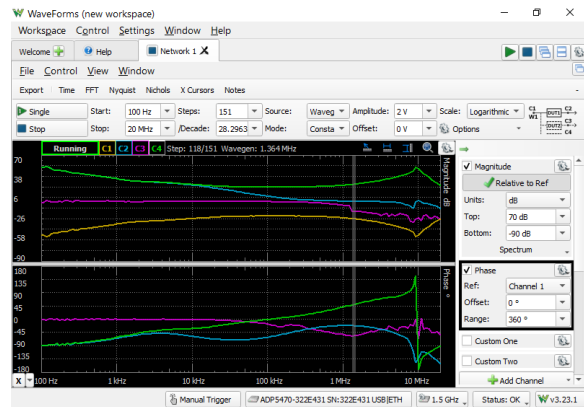


2.10 Impedance Analyzer

The Impedance Analyzer instrument is used to view a wide variety of frequency response characteristics of a circuit under test. Input, Phase, Voltage, Current, Impedance, Admittance, Inductance, Factor, and Nyquist plots are all available. In addition, Custom plots can be used to present the results of a wide variety of different mathematical operations on buffered data.

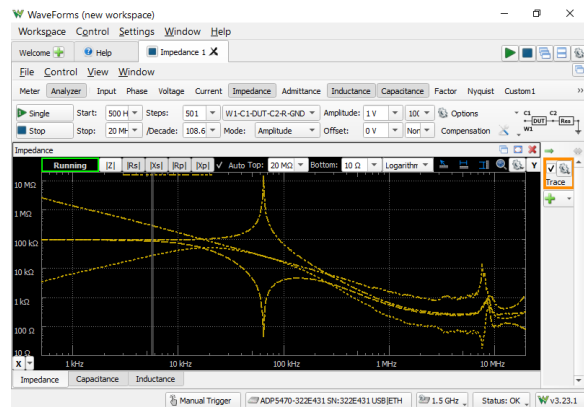


2.11 Protocol Analyzer

The Protocol Analyzer instrument generates SPI and I2C transactions through the ADP5000's dedicated digital input/output pins. Custom scripts can also be written within the Protocol Analyzer instrument to generate transaction sequences.

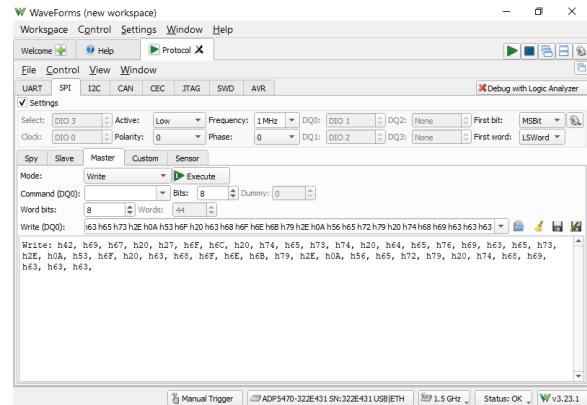

2.12 WaveForms Script Editor

Each of WaveForms' instruments can be controlled through scripts within the WaveForms application itself. WaveForms' "Script" instrument allows the user to write and run JavaScript code that can control the rest of the application through an extensive API. This allows the user to configure and run many instruments at the same time, in an easily repeatable way.

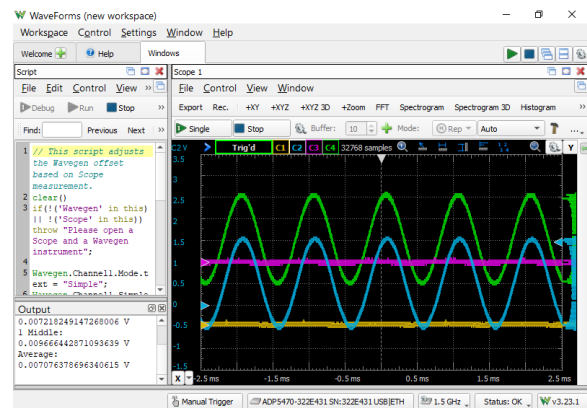

3 Extended Software Support

Diligent has created a package for LabVIEW to provide users with flexibility in the environment used for both data acquisition and subsequent analysis, providing a curated experience to let users that are more comfortable in different development environments still have access to all the power contained within the Analog Discovery Pro 5000 Series devices.

Users are also able to leverage existing NI VirtualBench applications created within LabVIEW with the equivalent Analog Discovery Pro 5000 Series device. Further customization and control of the 5000 Series can be done through Diligent's WaveForms SDK, letting users create their own applications in C/C++, Python, C#, and Visual Basic.

4 Analog Discovery Pro 5000 Series Specifications

These specifications are typical unless otherwise stated and are valid following 30 minutes of warm-up at 25 °C unless otherwise noted. Warranted specifications are valid at $T_{cal} \pm 5$ °C. Temperature coefficients are calculated using the temperature change from the last external calibration.

Specifications not assigned to an individual device are valid for all Analog Discovery Pro 5000 Series devices.

4.1 Mixed Signal Oscilloscope

Analog Input Channels

Supports the Oscilloscope, Voltmeter, Data Logger, Spectrum Analyzer, Network Analyzer, Impedance Analyzer, and Script Editor instruments.

Vertical System

	ADP5250	ADP5470	ADP5490
Number of Channels	Two	Four	Four
Input Type	Single-ended, non-isolated		
Connector Type	Front Panel BNC		
Hardware Input Range¹	10 mV / div 20 mV / div 40 mV / div 100 mV / div 200 mV / div 400 mV / div 1 V / div 2 V / div 4 V / div	4 mV / div 10 mV / div 20 mV / div 40 mV / div 100 mV / div 200 mV / div 400 mV / div 1 V / div 2 V / div 4 V / div	
Resolution	8 bits		
Absolute Resolution	up to 0.391 mV (at 10 mV/div range)	up to 0.156 mV (at 4 mV/div range)	
Accuracy (warranted)	±2% of input ±1% full scale (V peak to peak)		
Bandwidth (-3 dB)²	100 MHz	350 MHz	500 MHz
Hardware Bandwidth Limit (-3 dB)	20 MHz, can be enabled or disabled in software per channel		
Input Impedance	1 MΩ 20 pF	1 MΩ 15 pF or 50 Ω ³	1 MΩ 20 pF or 50 Ω ³
Input Coupling	DC or AC		
Vertical Sensitivity (range)	200 μV/div to 4 V/div (10 divisions) ⁴		
Acquisition Modes	average, decimate, min/max		

DC Offset Range

Range	Full Scale	Programmable Offset Range
Low range (≤40 mV/div)	10 V peak-to-peak	±5 V
High range (≥100 mV/div)	40 V peak-to-peak	±20 V

¹ There are 10 divisions for each hardware input range. Divisions in this context are the ten horizontal strips in the Analog Input graph windows within WaveForms. The hardware input range of value / div specifies the height of one strip in the plot.

² When using a probe with the appropriate frequency response.

³ Maximum voltage when using 50 Ω input mode is 5 V RMS. For a periodic waveform with frequency below 100 kHz, the maximum voltage is derated to 2.5 V RMS.

⁴ Divisions in this context are the ten horizontal strips in the Analog Input graph windows within WaveForms. Vertical sensitivity specifies the height of one strip in the plot.

Horizontal System

	ADP5250	ADP5470	ADP5490
Maximum Sample Rate	1 GS/s single channel 500 MS/s per channel, dual channel	1.5 GS/s per channel	2 GS/s per channel
Maximum Record Length	1 M Samples per channel		

Note: Acquisitions are made simultaneously on all enabled channels in all modes.

Note: Memory sizes, including buffer sizes, specified in units like kS and MS, are rounded from equivalent binary power units, such as MiS. For example, a listed 64 MS is rounded from 64 MiS, which is 67,108,864 samples.

Digital Input Channels

Supports the Logic Analyzer and Script Editor instruments.

Vertical System

Number of Channels	34
Connector	100 mil 2×10 MTE Header
Input Voltage	0 V to 5 V ¹
Input Current	≤50 μA
Input Threshold	Adjustable, 0 V to 2 V
Threshold Accuracy	350 mV
Input Impedance	100 kΩ 7.5 pF (nominal) pulled to -2.0 V to +6.5 V, varies with the input threshold setting
Logic Analyzer Interpreters	SPI, I2C, UART, CAN, I2S, 1-Wire, PS/2, HDMI CEC, Manchester codes, JTAG, GPIB, SWD, custom, and more

Horizontal System

Maximum Sampling Rate (warranted)	1 GS/s (down to ~15 kS/s) per channel
Record Length (Typical)	1 MS
Record Length (Minimum) ²	4 kS

Note: Memory sizes, including buffer sizes, specified in units like kS and MS, are rounded from equivalent binary power units, such as MiS. For example, a listed 64 MS is rounded from 64 MiS, which is 67,108,864 samples.

¹ Mixed signal oscilloscope digital channels are designed to withstand accidental overvoltage from signals on all three of the Analog Discovery Pro 5000 Series devices. They are not recommended for use with signals likely to exceed 0 V to 5 V in normal operation.

² Under most conditions, the logic analyzer can acquire 1 MS of data. Under some conditions with very high sustained activity on multiple inputs, the logic analyzer may only capture 4 kS of data.

4.2 Arbitrary Waveform Generator (Wavegen)

Supports the Waveform Generator, Network Analyzer, Impedance Analyzer, and Script Editor instruments.

Vertical System

	ADP5250	ADP5470	ADP5490
Number of Channels	One		
Output Type	Single-ended		
Connector Type	BNC		
Standard Functions	Sine, square, triangle, pulse, ramp, DC voltage, noise, others		
Output Voltage Range¹	±6 V at 50 Ω output impedance ±12 V at high (>10 kΩ) output impedance ²		
Resolution	14 bits		
Absolute Resolution	0.732 mV at 50 Ω output impedance 1.46 mV at high (>10 kΩ) output impedance ²		
Accuracy	±(1% of output value ± 5 mV) ³		
Output Impedance	50 Ω		
Bandwidth⁴	±0.3 dB to 20 MHz		±0.3 dB to 40 MHz
Total Harmonic Distortion (1 MHz)	-55 dBC		
Total Harmonic Distortion (10 MHz)	-50 dBC		
Phase Noise	-125 dBc/Hz at 10 kHz offset		
Rise/fall time	<20 ns (10% to 90%)		
Overshoot	<5% ⁵		
Jitter	8 ns cycle-to-cycle		
Overvoltage Protection	Short-circuit protected		
Custom Waveform Files Supported	Import files *.csv, *.txt, *.mp3, *.wav, *.wmv & *.avi, export as image, or as raw data in *.csv, *.txt or *.tdms formats		

DC Offset Range

Output Impedance	Offset Range ¹
50 Ω	±6 V
High (>10 kΩ) output impedance ²	±12 V

Horizontal System

	ADP5250	ADP5470	ADP5490
Maximum Sample Rate	125 MS/s		200 MS/s
Buffer Size	Up to 1 MS		

¹ The combination of signal amplitude and DC offset cannot exceed the output range specifications.

² The high output impedance is a load applied by the user to the AWG output.

³ Into a >10 kΩ load applied by the user

⁴ When using a connection with the appropriate frequency response.

⁵ At 5 MHz and slower Square wave

4.3 Digital I/O

Supports the Static I/O and Protocol instruments.

Digital I/O Channels

Number of Channels	Eight
Connector	1x14 Terminal Block
Function Control	Individually programmable as Digital I/O
Input Voltage	0 V to 5 V TTL ¹
Output Voltage	3.3 V LVTTTL
Drive Strength	4 mA
Pull Resistors	10 kΩ pull-down to 0 V for all I/O pins 1.5 kΩ pull-up to 3.3 V on I/O 6 and 7 when I2C is used

External Power

Number of Channels	One
Connector	1x14 Terminal block
Voltage	3.3 V ± 10%
Current	20 mA

4.4 Trigger System

Trigger Features

	ADP5250	ADP5470	ADP5490
System Trigger Sources	Oscilloscope analog channels, Oscilloscope digital channels, Arbitrary waveform generator start, External trigger (TRIG1), Power line frequency, Manual		
Trigger Modes	None, Auto, Normal, Manual (Forced Trigger), Single		
Analog Trigger	Edge, pulse, hysteresis		
Digital Trigger	Edge, level, pattern, glitch		
Analog/Oscilloscope Trigger Resolution	1 ns	667 ps	500 ps
Digital/Logic Analyzer Trigger Resolution	1 ns		
Wavegen Output Trigger Resolution	8 ns	8 ns	5 ns
Output Trigger Sources	Oscilloscope Start, Waveform Generator Start, Power line frequency, Drive low, Drive high		

¹ Digital I/O channels are designed to withstand accidental overvoltage from digital signals on Diligent's Test and Measurement boards or similar devices. They are not recommended for use with signals likely to exceed 0 V to 5 V in normal operation.

External Trigger (TRIG1) Characteristics

Trigger 1 can be used as a trigger input or output for multiple instruments.

Number of Channels	One
Trigger Type	Digital
Connector	Front Panel BNC
Input Voltage	5 V compatible TTL ¹
Output Voltage	3.3 V LVTTTL output
Channel Pull Resistors	1 M Ω pull-down
Direction Control	Programmable as input or output

4.5 Digital Multimeter

Functionality

Functions	DC Voltage, AC Voltage, DC current, AC current, resistance, diode, continuity
Resolution	5½ digits
Sample Rate	5 S/s


Caution: Do not use this device for connection to signals or for measurements within Measurement Categories III or IV. For more information about Measurement Categories, refer to the [Safety Voltages](#) section.

Input Protection

	ADP5250	ADP5470	ADP5490
Resistance, Diode	Up to 300 V DC		
DC and AC Voltage	Up to 300 V DC or 265 V AC RMS, 400 V AC (peak)		
DMM A Current Connector Fuse^{2,3}	Internal ceramic fuse, 10 A 250 V, time-delay, 5 x 20 mm, T 10A H 250V (Bussman part number D505H-10-R at http://www.cooperindustries.com)	Internal ceramic fuse, 11 A, 1 kV AC, 10.3 x 38 mm, F 11A 1000V (SIBA part number 5019906.11 at http://www.siba-fuses.com/)	
DMM mA Current Connector Fuse^{2, 2}	Internal ceramic fuse, 1.25 A 250 V, time-delay, 5 x 20 mm, T 1.25A H 250V (Bussman part number S505H-1.25-R at http://www.cooperindustries.com)	Internal ceramic fuse, 1 A, 500 V AC, 5 x 20 mm, T 1A H 400V (Littelfuse part number 0477001.MXP at http://www.littelfuse.com)	
Maximum common-mode voltage	300 V DC or AC (rms)		

¹ The external trigger line is designed to withstand accidental overvoltage from digital signals on Digilent's Test and Measurement boards or similar devices. They are not recommended for use with signals likely to exceed 0 V to 5 V in normal operation.

² Fuses are located on bottom of device underneath door. Use Phillips #1 screwdriver for removal. Ensure all hazardous voltages are disconnected from the device prior to removal of door.

³ When the fuse symbol, , is marked on a device, take proper precautions.

DC

DC Voltage Accuracy

Range	Input Impedance	1-Year Accuracy \pm (% of Reading + % of Range) (warranted)	Temperature Coefficient \pm (% of Reading + % of Range)/C° (warranted)
100 mV ¹	<10 G Ω , 10 M Ω	0.015 + 0.005	0.001 + 0.0005
1 V	<10 G Ω , 10 M Ω	0.015 + 0.005	0.001 + 0.0005
10 V	<10 G Ω , 10 M Ω	0.015 + 0.005	0.001 + 0.0005
100 V	10 M Ω	0.035 + 0.005	0.005 + 0.0005
300 V	10 M Ω	0.035 + 0.005	0.005 + 0.0005

DC Current Accuracy

Range	Burden Voltage	1-Year Accuracy \pm (% of Reading + % of Range) (warranted)	Temperature Coefficient \pm (% of Reading + % of Range)/C° (warranted)
10 mA	<0.03 V	0.070 + 0.020	0.0035 + 0.0010
100 mA	<0.3 V	0.070 + 0.003	0.0020 + 0.0010
1 A	<0.03 V	0.130 + 0.025	0.0065 + 0.0010
10 A ²	<0.3 V	0.130 + 0.004	0.0045 + 0.0010

DC Resistance Accuracy (2-Wire), 1 V Open Circuit Voltage

Range	Short-Circuit Current	1-Year Accuracy \pm (% of Reading + % of Range) ³ (warranted)	Temperature Coefficient \pm (% of Reading + % of Range)/C° (warranted)
100 Ω	170 μ A	0.018 + 0.050	0.0010 + 0.0005
1 k Ω	170 μ A	0.018 + 0.005	0.0010 + 0.0005
10 k Ω	70 μ A	0.018 + 0.005	0.0010 + 0.0005
100 k Ω	10 μ A	0.018 + 0.005	0.0010 + 0.0005
1 M Ω	1.1 μ A	0.035 + 0.005	0.0040 + 0.0005
10 M Ω	1.1 μ A	0.150 + 0.005	0.0100 + 0.0005
100 M Ω	1.1 μ A	0.150 + 0.005	0.1000 + 0.0005

Caution: The input terminals of the DMM are not protected for electromagnetic interference. As a result, the DMM may experience reduced measurement accuracy or other temporary performance degradation when connected to unshielded test leads in an environment with radiated or conducted radio frequency electromagnetic interference.

¹ Add 15 μ V if not immediately following offset null.

² 30 seconds on, 30 seconds off. Add 300 ppm for currents >2.2 A. After measuring >5 A, wait two minutes to get full accuracy in the 1 A range.

³ Perform offset nulling for these values.

Additional DC Characteristics

DC Continuity Accuracy Range	100 Ω
DC Diode Test Range	2 V
Effective Common-Mode Rejection-Mode Ratio (CMRR), 1 k Ω resistance in LO lead	>100 dB
Normal-Mode Rejection Ratio (NMRR), 50/60 Hz \pm 0.1%	>100 dB
Overrange	105% of range except 300 V

AC

AC Voltage Accuracy

Range (rms)	Peak Voltage	Frequency	1-Year Accuracy \pm (% of Reading + % of Range) (warranted)	Temperature Coefficient \pm (% of Reading + % of Range)/C $^{\circ}$ (warranted)
100 mV, 1 V, 10 V, 100 V, 265 V	\pm 210 mV, \pm 2.1 V, \pm 21 V, \pm 210 V, \pm 400 V	20 Hz to 45 Hz	0.91 + 0.10	0.01 + 0.005
		45 Hz to 65 Hz	0.30 + 0.05	0.01 + 0.005
		65 Hz to 1 kHz	0.21 + 0.05	0.01 + 0.005
		1 kHz to 5 kHz	0.12 + 0.05	0.01 + 0.005
		5 kHz to 20 kHz	0.35 + 0.05	0.01 + 0.005

AC Current Accuracy

Range (rms)	Short-Circuit Current	Burden Voltage (rms)	Frequency	1-Year Accuracy \pm (% of Reading + % of Range) (warranted)	Temperature Coefficient \pm (% of Reading + % of Range)/C $^{\circ}$ (warranted)
5 mA	\pm 10.5 mA	<0.02	20 Hz to 1 kHz	0.20 + 0.01	0.01 + 0.005
5 mA	\pm 10.5 mA	<0.02	1 kHz to 5 kHz	0.60 + 0.01	0.01 + 0.005
50 mA	\pm 105 mA	<0.2 V	20 Hz to 1 kHz	0.20 + 0.01	0.01 + 0.005
50 mA	\pm 105 mA	<0.2 V	1 kHz to 5 kHz	0.50 + 0.01	0.01 + 0.005
500 mA	\pm 1.05 A	<0.02 V	20 Hz to 1 kHz	0.15 + 0.01	0.01 + 0.005
500 mA	\pm 1.05 A	<0.02 V	1 kHz to 5 kHz	0.50 + 0.01	0.01 + 0.005
5 A	\pm 1.05 A	<0.02 V	20 Hz to 1 kHz	0.25 + 0.03	0.01 + 0.005
5 A	\pm 1.05 A	<0.02 V	1 kHz to 5 kHz	0.60 + 0.03	0.01 + 0.005

Caution: The input terminals of the DMM are not protected for electromagnetic interference. As a result, the DMM may experience reduced measurement accuracy or other temporary performance degradation when connected to unshielded test leads in an environment with radiated or conducted radio frequency electromagnetic interference.

Additional AC Characteristics

Input Impedance	10 M Ω 200 pF
Effective Common-Mode Rejection-Mode Ratio (CMRR), 1 kΩ resistance in LO lead	>70 dB (DC to Hz)

4.6 Programmable Power Supply

ADP5250 Characteristics

	+6 V	+25 V	-25 V
DC Voltage Output (warranted)	0 V to +6 V	0 V to +25 V	0 V to -25 V
DC Current Output (warranted)^{1,2}	1 A	500 mA (isolated)	500 mA (isolated)
Voltage Programming Accuracy³, \pm(% of reading + offset) (warranted)	0.1% + 5 mV	0.15% + 20 mV	0.15% + 20 mV
Current Programming Accuracy^{1,3}, \pm(% of reading + offset) (warranted)	0.2% + 10 mA	0.15% + 4 mA	0.15% + 4 mA
Voltage Readback Accuracy³, \pm(% of reading + offset) (warranted)	0.1% + 5 mV	0.15% + 20 mV	0.15% + 20 mV
Current Readback Accuracy³, \pm(% of reading + offset) (warranted)	0.2% + 10 mA	0.15% + 4 mA	0.15% + 4 mA
Voltage Programming Resolution	1.7 mV	6.5 mV	6.5 mV
Current Programming Resolution	0.30 mA	0.15 mA	0.15 mA
Voltage Readback Resolution	0.41 mV	1.7 mV	1.7 mV
Current Readback Resolution	70 μ A	35 μ A	35 μ A
Load Regulation⁴) \pm(% of reading + offset)	0.01% + 25 mV	0.03% + 5 mV	0.03% + 5 mV
Overvoltage Protection	10 V	30 V	
Reverse Voltage Protection	Reverse clamp diode, protected by self-resetting fuse		
Connector Type	1 \times 6 Pluggable Screw Terminal Block		

¹ Minimum programmable current limit is 1% of range.

² The +25 V and -25 V channels are bank isolated from ground but not from each other.

³ Programming and readback accuracy specified at no load.

⁴ Change in output voltage for any load within range.

ADP5470 and ADP5490 Characteristics

	+6 V	+25 V	-25 V
DC Voltage Output (warranted)	0 V to +6 V	0 V to +25 V	0 V to -25 V
DC Current Output (warranted) ^{1,2}	3 A	1 A (isolated)	1 A (isolated)
Voltage Programming Accuracy ³ , \pm (% of reading + offset) (warranted)	0.1% + 5 mV	0.1% + 20 mV	0.1% + 20 mV
Current Programming Accuracy ^{1,2} , \pm (% of reading + offset) (warranted)	0.2% + 10 mA	0.15% + 4 mA	0.15% + 4 mA
Voltage Readback Accuracy ³ , \pm (% of reading + offset) (warranted)	0.1% + 5 mV	0.1% + 20 mV	0.1% + 20 mV
Current Readback Accuracy ² , \pm (% of reading + offset) (warranted)	0.2% + 10 mA	0.15% + 4 mA	0.15% + 4 mA
Voltage Programming Resolution	1.6 mV	6.6 mV	6.6 mV
Current Programming Resolution	0.90 mA	0.30 mA	0.30 mA
Voltage Readback Resolution	0.40 mV	1.7 mV	1.7 mV
Current Readback Resolution	210 μ A	70 μ A	70 μ A
Load Regulation ⁴ \pm (% of reading + offset)	0.01% + 25 mV	0.03% + 5 mV	0.03% + 5 mV
Overvoltage Protection	30 V		
Reverse Voltage Protection	Reverse clamp diode, protected by self-resetting fuse		
Connector Type	1×6 Pluggable Screw Terminal Block		

¹ Minimum programmable current limit is 1% of range.

² The +25 V and -25 V channels are bank isolated from ground but not from each other.

³ Programming and readback accuracy specified at no load.

⁴ Change in output voltage for any load within range.

4.7 Device Configurations

The Analog Discovery Pro 5000 Series devices each have a single device configuration.

Configuration	Scope Buffer Size	Wavegen Buffer Size	Logic Buffer Size
1	One million points per channel	64 kS for each channel, one million point buffer when used in play mode	One million samples aggregate

Note: Memory sizes, including buffer sizes, specified in units like kS and MS, are rounded from equivalent binary power units, such as MiS. For example, a listed 64 MS is rounded from 64 MiS, which is 67,108,864 samples.

4.8 Additional Features

Spectrum Analyzer

	ADP5250	ADP5470	ADP5490
Frequency Range ¹	0 Hz to 100 MHz, up to 10 001 samples	0 Hz to 350 MHz, up to 10 001 samples	0 Hz to 500 MHz, up to 10 001 samples
Display Modes	Magnitude, average, peak hold, min hold, count, and more		
Y Axis	Peak (V), \tilde{V}/VHz , dB \tilde{V} , dBu, dBm, dBFS, and more		
X Axis	Linear or Logarithmic		
Power Spectrum Algorithms	FFT, CZT		
Windowing Functions	Rectangular, Triangular, Hamming, Hann, Cosine, Blackman-Harris, Flat Top, Kaiser		

Network Analyzer

	ADP5250	ADP5470	ADP5490
Frequency Range ²	20 Hz to 100 MHz, up to 10 001 samples	10 Hz to 350 MHz, up to 10 001 samples	10 Hz to 500 MHz, up to 10 001 samples
Display Modes	Magnitude, Phase		
Y Axis	Linear or Logarithmic, dB, gain, V_{peak} , and more magnitude representations		
X Axis	Linear or Logarithmic		
Plots	Bode, Time, FFT, Nichols, Nyquist		

¹ Higher frequencies may be selected within WaveForms, but results may be limited by the analog input bandwidth of the hardware.

² Higher frequencies may be selected within WaveForms, but results may be limited by the analog input and output bandwidth of the hardware.

Impedance Analyzer

	ADP5250	ADP5470	ADP5490
Frequency Range	20 Hz to 20 MHz, up to 10 001 samples	10 Hz to 20 MHz, up to 10 001 samples	10 Hz to 40 MHz, up to 10 001 samples
Display Modes	Magnitude, Phase		
Y Axis	Linear or Logarithmic		
X Axis	Linear or Logarithmic		
Plots	Bode, Time, FFT, Nichols, Nyquist, Custom		
Measurements	Impedance, Admittance, Inductance, Capacitance, and more		

Protocol Analyzer

Shares digital input/output channels with the Static I/O instrument. See [Digital I/O](#) for electrical characteristics.

Protocols ¹	SPI and I2C, host controller mode and custom only
------------------------	---

Math Channels

Operations	Addition "+", Subtraction "-", Multiplication "*", Division "/", Remainder "%"
Brackets	Parenthesis "()", Square "[]"
Constants	Exp, Ln, Log, Pi
Functions	Logarithm, power, minimum, maximum, square root, sine, cos, tan, arccos, arctan, arctan2, absolute value, floor, ceiling, and more
Operands	All analog and digital input channels, reference waveforms, time, constants, Pi, and more
Custom Software Channels	Butterworth, Chebyshev, Lock-In Amplifier

4.9 Connectivity

USB Interface

Device to Computer Interface	USB 2.0 Hi-Speed, Type B
------------------------------	--------------------------

Ethernet Interface

	ADP5250	ADP5470	ADP5490
Network Interface	N/A	1000 Base-TX, full-duplex 100 Base-TX, full-duplex 100 Base-TX, half-duplex 10 Base-T, full-duplex 10 Base-T, half-duplex	
Communication Rates	N/A	10/100/1000 Mbps, auto-negotiated	
Connector Type	N/A	RJ-45	

Note: The MAC address of the Ethernet port is listed on the sticker located on the underside of the device.

¹ This functionality is implemented by WaveForms software on the host system.

4.10 Power Requirements

The ADP50F00 Series devices require external power.

	ADP5250	ADP5470	ADP5490
Voltage Input Range	120 V _{AC} to 240 V _{AC} , 50/60 Hz		
Power Consumption	100 W maximum	150 W maximum	
Power Input Connector	IEC C13 power connector		
Power Disconnect	The AC power cable provides main power disconnect. Do not position the equipment so that it is difficult to disconnect the power cable. Depressing the front panel power button does not inhibit the internal power supply.		

4.11 Physical Characteristics

Dimensions

	ADP5250	ADP5470	ADP5490
Dimensions (Width x Depth x Height)	25.40 cm x 19.05 cm x 7.77 cm (10.00 in x 7.50 in x 3.06 in)	30.48 cm x 20.32 cm x 9.40 cm (12.0 in. x 8.0 in. x 3.7 in.)	
Weight	2.05 kg (4 lb 8.3 oz)	3.130 kg (6 lb 4.4 oz)	

Note: If the device needs to be cleaned, wipe with a dry towel.

Note: Use the ADP5000 devices in a horizontal orientation. Allow at least 10.16 cm (4.0 in.) of clearance in front and behind the device for USB, power, and common connector cabling.

Physical Connectivity

	ADP5250	ADP5470	ADP5490
Mixed Signal Oscilloscope	Two BNC	Four BNC	
Logic Analyzer	One 2x20 shrouded IDC header		
External Trigger	One BNC		
Arbitrary Waveform Generator	One BNC		
Digital I/O Connector Type	One Pluggable Screw Terminal, 3.5 mm (14 position)		
Digital I/O Screw Terminal Wiring	0.1 mm ² to 2.0 mm ² (30 AWG to 14 AWG)		
Digital IO Screw Terminal Torque	0.25 N · m (2.2 lb · in.)		
Digital Multimeter	Four 4 mm banana jacks		
DC Power Supply Connector Type	One Pluggable Screw Terminal, 3.81 mm (6 position)	Six 4 mm binding posts	
DC Power Supply Screw Terminal Wiring	0.1 mm ² to 2.0 mm ² (30 AWG to 14 AWG)	N/A	
DC Power Supply Screw Terminal Torque	0.25 N · m (2.2 lb · in.)	N/A	
Security Cable Slot	1, complies with Kensington security slot dimensions		

4.12 Safety Voltages

Connect only voltages that are within these limits.

Digital Multimeter Isolation Voltages (Ground to Earth)



Hazardous Voltage: This icon denotes a warning advising you to take precautions to avoid electrical shock.

Channel-to-earth Ground

Continuous	300 V, Measurement Category II ¹
Withstand	3000 V (RMS), verified by a 5 s dielectric withstand test

Caution: Do not connect the ADP5000 Series hardware to signals or use for measurements within Measurement Categories III or IV.

DC Power Supply Isolation Voltages

+25 V and -25 V to earth ground, continuous	60 V _{DC} , Measurement Category I ²
--	--

4.13 Environmental

Ambient Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	-20 °C to 70 °C (-4 °F to 158 °F)
Operating Humidity	10% to 90% RH non-condensing DMM full accuracy at 10% to 80%
Storage Humidity	5% to 95% RH non-condensing
Cooling	Forced air circulation (positive pressurization) through a fan. Fan speed automatically adjusts according to operating conditions. Intake and exhaust locations are on the sides and rear of device. Ensure that the intake and exhaust locations are not obstructed.
Pollution Degree	2
Maximum Altitude	2000 m

Note: For indoor use only.

¹ Measurement Category II is for measurements performed on circuits directly connected to the electrical distribution system. This category refers to local-level electrical distribution, such as that provided by a standard wall outlet, for example, 115 V for U.S. or 230 V for Europe.

² Measurement Categories CAT I and CAT O (Other) are equivalent. The input circuits are not intended for direct connection to the MAINS building installations of Categories CAT II, CAT III, or CAT IV.

Shock and Vibration:

Operational Shock	30 g peak, half sine, 11 ns pulse (Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)
Random Vibration (Operating)	5 Hz to 500 Hz, 0.3 g _{rms}
Random Vibration (Non-operating)	5 Hz to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC 60068-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

4.14 Certifications

- [Analog Discovery Pro \(ADP5250\) Declaration of Conformity](#)
- [Analog Discovery Pro \(ADP5470\) Declaration of Conformity](#)
- [Analog Discovery Pro \(ADP5490\) Declaration of Conformity](#)

5 Ordering Information and Purchasing Options



Digilent Part Numbers:

- 411-001 – Analog Discovery Pro (ADP5250) Kit:
 - One (1) ADP5250
 - One (1) 1x6 Power Supply Screw Terminal Adapter
 - Additional components, listed below
- 471-058 – ADP5250 Probe Bundle adds the following to 411-001:
 - Two (2) P2150 150 MHz x1/x10 Oscilloscope Probes
 - Two (2) BNC to Minigrabber Cables
- 411-002 – Analog Discovery Pro (ADP5470) Kit:
 - One (1) ADP5470
 - Four (4) T2500 500 MHz x1/x10 Oscilloscope Probes
 - One (1) Digilent Screwdriver
 - Additional components, listed below
- 411-003 – Analog Discovery Pro (ADP5490) Kit:
 - One (1) ADP5490
 - Four (4) T2500 500 MHz x1/x10 Oscilloscope Probes
 - One (1) Digilent Screwdriver
 - Additional components, listed below

All Analog Discovery Pro 5000 Series product kits come with:

- One (1) USB A to B cable
- One (1) 2x20 Logic Analyzer MTE Cable
- One (1) Set of Red and Black DMM Probes
- One (1) 1x14 Digital I/O Screw Terminal Adapter
- One (1) US IEC Cable, with EU and UK adapters

6 Recommended Accessories

Digilent Part Number: 240-136 – [BNC to Minigrabber Cable](#)

Digilent Part Number: 240-134 – [BNC to Alligator Clip Cable](#)


Use of these BNC cables is recommended for analog output. BNC Oscilloscope Probes should not be used with the AWG.

Banana cables for the ADP5470 and ADP5490 power supplies are not included.

7 Additional Resources

Reference material for all of the Analog Discovery Pro 5000 Series devices including a getting started guide, reference manual, specifications, and tutorials on each of the instruments within WaveForms can be found on the [Analog Discovery Pro 5000 Series' Resource Center](#) on Digilent's Reference site.

8 The Essential Instruments Family

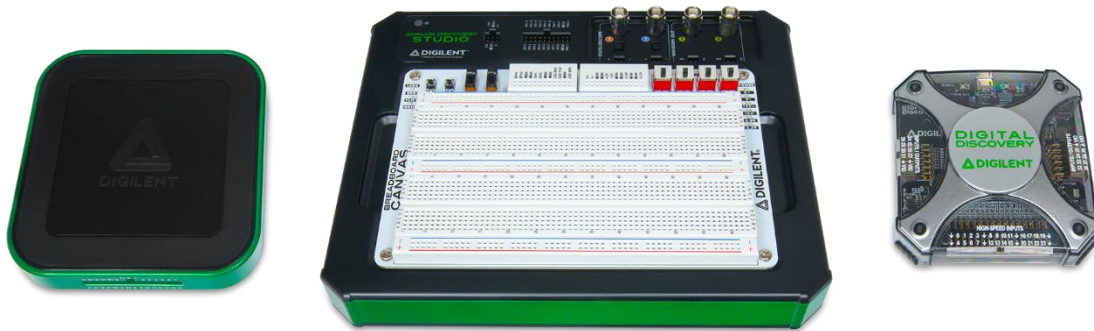

Digilent's Essential Instruments family is perfect for engineers looking for a low barrier to entry while broadening their expertise with Test and Measurement equipment. These devices are cost-optimized for students and engineers alike, provide maximum value for minimal cost. From the Digital Discovery, a dedicated workhorse for debugging digital interfaces, to the Analog Discovery Studio, an all-in-one electronics laboratory, to the legendary Analog Discovery 2 and 3, in conjunction with Digilent's freely available WaveForms software, each device provides a solid foundation for any engineer who needs to test or debug their projects.

Analog Discovery 3

The Analog Discovery 3 is a multi-function test and measurement device, providing a digital oscilloscope, logic analyzer, waveform generator, pattern generator, and much more – all in a device that fits in the palm of your hand. Building on the foundation set by the Analog Discovery 2, the Analog Discovery 3 offers a faster and flexible sampling rate, double the memory buffer, and more robust power supplies. Using the flexible WaveForms software (supported by Windows, Mac, and Linux), the Analog Discovery 3 can be used in the lab, in the field, or even at home - you're no longer tied down to a traditional benchtop and stacks of expensive test instruments.

Digital Discovery

The Digital Discovery is a combination USB logic analyzer and pattern generator, featuring 24 high-speed digital inputs and 16 digital I/O channels. With a high-speed adapter, the device can sample up to 800 MS/s on up to 8 input channels. Sampling up to 100 MS/s is supported on all channels. DDR memory offers deep input buffers, with 64 MS of input buffer per high-speed input channel.

Analog Discovery Studio

The Analog Discovery Studio is an all-in-one electronics laboratory, featuring Digilent's removable Canvas modules – A modular ecosystem of top boards that let you customize the Analog Discovery Studio platform for your learning environment. After prototyping their breadboard circuits at home, students can then test their creations on the day of the lab with the Analog Discovery Studio as well as readily swap out their Canvas for any pre-built reference designs. Different canvases offer different learning opportunities – options include those with substantial breadboardable space, through-hole and surface-mount solderable surfaces for prototyping, various digital components, and even the ability to mount an FPGA development board for mixed-signal – analog and digital – coursework.

9 Analog Discovery Pro Line



Digilent's Analog Discovery Pro line is for users who are ready to go pro. With expanded feature sets not offered in Digilent's Test and Measurement Essentials line including deep memory, higher bandwidth, networking capability, and USB 3.0, an Analog Discovery Pro device has already stepped up to the challenging task ahead of you.

Devices in the Analog Discovery Pro family provide the utility of professional benchtop equipment with the flexibility of a portable instrument. The series includes mixed signal oscilloscope and programmable power supply instruments that give engineers the ability to tap into the efficiency of the WaveForms software while offering a wider selection of specifications in products created with the professional in mind. Other members of the Analog Discovery Pro family include:

Analog Discovery Pro 2000 Series

- Mixed signal oscilloscope
- BNC connectors and an aluminum case
- Two analog inputs – 50+ MHz bandwidth
- One analog output – 15 MHz bandwidth
- 16 Digital I/O
- Sample rates up to 125 MS/s
- Two programmable power supply outputs
- Deep memory buffers for long acquisitions – up to 128 MS per channel for analog input
- USB 3.0 connectivity
- Dual Mode for synchronization of multiple devices

Analog Discovery Pro 3000 Series

- Mixed signal oscilloscope
- Two or four analog inputs, two analog outputs
- 0.5 GS/s sample rate (with oversampling), per channel
- 55+ MHz bandwidth
- 16 Digital I/O
- Ethernet connectivity
- Linux Mode

Discovery USB Programmable Power Supply (DPS3340)

- USB programmable power supply
- Three channels
- 1 V to 5 V, -1 V to -15 V, 1 V to 15 V

10 About Digilent

Digilent is committed to making engineering accessible, offering competitive pricing, portable products, and comprehensive documentation. Specializing in test and measurement devices, Xilinx-based FPGA development boards, a variety of expansion modules for customizing applications, and robust options for DAQ and datalogging, our design philosophy champions your creativity. By emphasizing speed, modularity, customizability, and world-class support, we provide the building blocks while you bring the brilliance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Benchtop Oscilloscopes](#) category:

Click to view products by [Digilent](#) manufacturer:

Other Similar products are found below :

[UTD2072CL](#) [UPO1104](#) [MSO3354E-S](#) [UPO1202CS](#) [RTB-BNDL](#) [UTD2102CL+](#) [MSO3504E](#) [XDS4502](#) [P 1331](#) [UTD2202CEX+](#)
[UTD2152CL](#) [P 1326](#) [UPO1102CS](#) [BK2194](#) [MSO2202-S](#) [MSO2202](#) [MSO2104-S](#) [P 1286](#) [UPO2074E](#) [UPO1204](#) [MSO2102-S](#) [FDS1102](#)
[MSO2204-S](#) [FDS1102A](#) [UTD2052CEX+](#) [MSO2104](#) [T3DSO2204HD](#) [UPO1054](#) [UPO2104](#) [DSO3064A](#) [MSO5062D](#) [CC-650](#) [GDS-2204E](#)
[2555](#) [2557](#) [2568](#) [BK2190E](#) [PICOSCOPE 5244D](#) [PICOSCOPE 5444D](#) [PICOSCOPE 5244D](#) [MSO](#) [DSOX2MSO](#) [DSC-5300](#) [HDO4104A](#)
[HDO4024A](#) [2569-MSO](#) [2190E](#) [DSOX2002A/DSO0000-903](#) [MSOX2024A/DSO0000-903](#) [WAVESURFER 3104Z](#) [MDO-2204EX](#)