
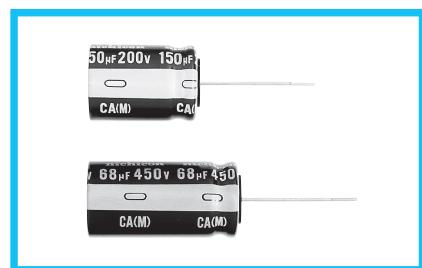


**UCA**


Miniature Sized, High Ripple Current, Long Life

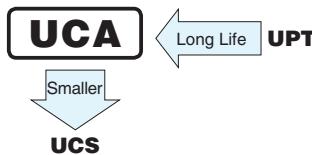


- High ripple current and Long Life product withstanding load life of 12000 hours(10000 hours for  $\phi D=10$ ) at  $+105^{\circ}\text{C}$ .
- Suited for ballast application.
- Compliant to the RoHS directive (2011/65/EU).

**■ Specifications**

Item	Performance Characteristics																				
Category Temperature Range	-25 to $+105^{\circ}\text{C}$																				
Rated Voltage Range	160 to 450V																				
Rated Capacitance Range	6.8 to 220 $\mu\text{F}$																				
Capacitance Tolerance	$\pm 20\%$ at 120Hz, $20^{\circ}\text{C}$																				
Leakage Current	After 1 minute's application of rated voltage at $20^{\circ}\text{C}$ , leakage current is not more than $0.04CV+100$ ( $\mu\text{A}$ )																				
Tangent of loss angle ( $\tan \delta$ )	Measurement frequency : 120Hz at $20^{\circ}\text{C}$ <table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td><math>\tan \delta</math> (MAX.)</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> </tr> </tbody> </table>							Rated voltage (V)	160	200	250	350	400	450	$\tan \delta$ (MAX.)	0.15	0.15	0.15	0.20	0.20	0.20
Rated voltage (V)	160	200	250	350	400	450															
$\tan \delta$ (MAX.)	0.15	0.15	0.15	0.20	0.20	0.20															
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio ZT / Z20 (MAX.) [Z-<math>25^{\circ}\text{C}</math> / Z+<math>20^{\circ}\text{C}</math>]</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> </tr> </tbody> </table>							Rated voltage (V)	160	200	250	350	400	450	Impedance ratio ZT / Z20 (MAX.) [Z- $25^{\circ}\text{C}$ / Z+ $20^{\circ}\text{C}$ ]	3	3	3	6	6	6
Rated voltage (V)	160	200	250	350	400	450															
Impedance ratio ZT / Z20 (MAX.) [Z- $25^{\circ}\text{C}$ / Z+ $20^{\circ}\text{C}$ ]	3	3	3	6	6	6															
Endurance	The specifications listed at right shall be met when the capacitors are restored to $20^{\circ}\text{C}$ after D.C. bias plus rated ripple current is applied for 12000 hours (10000 hours for $\phi D=10$ ) at $105^{\circ}\text{C}$ , the peak voltage shall not exceed the rated voltage.					Capacitance change	Within $\pm 20\%$ of the initial capacitance value														
						$\tan \delta$	200% or less than the initial specified value														
						Leakage current	Less than or equal to the initial specified value														
Shelf Life	After storing the capacitors under no load at $105^{\circ}\text{C}$ for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at $20^{\circ}\text{C}$ , they shall meet the specified values for the endurance characteristics listed above.																				
Marking	Printed with white color letter on dark brown sleeve.																				

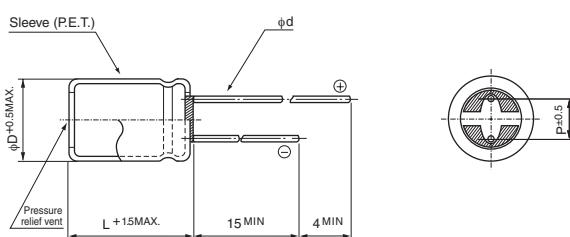**■ Radial Lead Type**

(mm)			
$\phi D$	10	12.5	16
P	5.0	5.0	7.5
$\phi d$	0.6	0.6	0.8

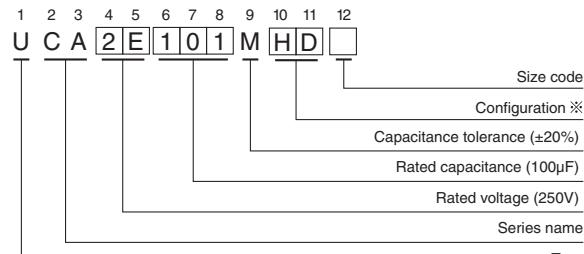**Type numbering system (Example : 250V 100 $\mu\text{F}$ )**

## ※ Configuration

$\phi D$	Pb-free leadwire Pb-free PET sleeve
10	PD
12.5 to 18	HD

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

# UCA

## ■ Dimensions

Cap. ( $\mu\text{F}$ )	V	160		200		250		350		400		450	
		Code	2C	Code	2D	Code	2E	Code	2V	Code	2G	Code	2W
6.8	6R8							10 × 16	220	10 × 16	220	10 × 20	150
10	100	10 × 16	250	10 × 16	250	10 × 20	300	10 × 20	280	10 × 20	280	12.5 × 20	320
22	220	10 × 20	500	10 × 20	500	12.5 × 20	600	12.5 × 20	350	12.5 × 20	430	16 × 25	560
33	330	10 × 20	565	12.5 × 20	600	12.5 × 20	630	16 × 20	600	16 × 25	640	16 × 31.5	700
47	470	12.5 × 20	725	12.5 × 20	780	12.5 × 25	720	16 × 25	700	16 × 31.5	840	18 × 31.5	900
68	680	12.5 × 25	950	12.5 × 25	950	16 × 25	1000	16 × 31.5	1100	18 × 31.5	1000		
		▲ 16 × 20	970	▲ 16 × 20	970	▲ 18 × 20	920	▲ 18 × 25	875				
100	101	16 × 25	1280	16 × 25	1280	16 × 31.5	1400						
		▲ 18 × 20	1180	▲ 18 × 20	1180	▲ 18 × 25	1345						
150	151	16 × 31.5	1360	16 × 31.5	1360	18 × 31.5	1500						
		▲ 18 × 25	1360	▲ 18 × 25	1360								
220	221	16 × 31.5	1400	18 × 31.5	1700							Case size ΦD × L (mm)	※
		▲ 18 × 25	1400										

※ : Rated ripple current (mA rms) at 105°C 100kHz

▲ : In this case, [6] will be put at 12th digit  
of type numbering system.

## • Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	1kHz	10kHz	100kHz or more
Coefficient	0.40	0.50	0.80	0.90	1.00

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:***

***Click to view products by Nichicon manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)