



Cost effective, compact totalizer... large display with backlighting

All in the family - Matching A103 series products in other sections of this catalog:

A103 Preset Counters:	Section 2
A103 Tachometers/Rate Indicators:	Section 4
A103 Time Indicators:	Section 5
A103 Preset Timers:	Section 5



The A103 totalizers provide a range of capabilities unequalled in products of similar size and cost. In addition to the totalizing models shown here, the A103 series also includes matching indicators for timing and rate/speed metering and models with a preset output for control by count or time. All are in a uniform 36 x 72 millimeters bezel size package, enhancing your control panel with a family of devices that look and program alike.

A supertwist LCD display with thick 12mm (.47") high digits allows for easy viewing at a glance and feature display-backlight capability by simply connecting an external 12VDC supply.

Powered by an internal 3 volt battery, the A103's unique design has two battery slots; this allows battery changeover without loss of memory.

Numerous types of inputs can be accepted giving you a totally self-contained system not requiring external power.

- Matching predetermining counter, time and rate indicators and controllers available – look great together on a panel
- Bidirectional models with input scale multiplier, polarity sign, decimal point selection, and programmable reset value
- High visibility 8-digit LCD display with backlighting capability standard
- Long life 3 Volt lithium battery eliminates the need for external power
- Accepts input signals from a variety of sources: Dry Contact, PNP or NPN Sensors, Encoders
- High speed and low speed count inputs
- Resettable remotely or from the front panel
- Programmable security of front panel reset button
- Option modules provide additional functionality and added convenience – fast, easy installation
- NEMA 4X/IP65 rated front panel for use in washdown environments

The A103 totalizers are further enhanced by a series of quick-attach option modules. These can provide a power supply for sensors and display backlighting, and accept high or low voltage AC or DC input signals.

SPECIFICATIONS

High Speed Count Input: PNP or square wave pulse; 10 kHz max (50% duty cycle), 45 µsec min pulse width; Low State: < 1.0 VDC, High State: > 2.0 VDC (28VDC max)

Low Speed Count Input: NPN, Contact Closure; 30 Hz max (50% duty cycle), 12 ms min pulse width; Low State: < 1.0 VDC, High State: > 2.0 VDC (28VDC max)

Calibration: (Models A103-001 & A103-002) Programmable input scale multiplier. Range: 0.0001 to 99.9999

Security Input: Allows access to panel reset and programming features

Reset Action: Reset to zero by panel button or remote input. Models A103-001 & A103-002: Programmable for reset to a value of -999999 to 999999

Remote Reset Input: NPN or Contact Closure to common; edge sensitive

Power Source: Single or dual 3V Lithium battery; typical 5 years life w/single battery, 10 years w/dual batteries. Field-replaceable batteries

Display: 12mm high, Supertwist LCD; 8 digits; "Low Bat" indicator. A103-001 and A103-002 have polarity sign to indicate counting below zero

Backlighting: Green illumination over whole viewable area. Requires 10 to 28 VDC power source

Dimensions & Mounting: See dimensions figure. Panel Mount with supplied mounting bracket and gasket

Connections: Screw terminals

Operating Temperature: +32° to +131 °F (0° to +55°C)

Weight: Approximately 64 grams (2.25 ounces)

OPTION MODULE SPECIFICATIONS

Option modules accessories provide a convenient integrated solution to applications that require count signal voltage conditioning, and/or a voltage source for use with external sensors or the A103's display backlight feature. Specifications for each option module feature follow, while specific combinations of features are listed in the "Models" table, below.

High Voltage Input: Allows A103 to accept 100 to 260 Volt AC/DC for count input

Low Voltage Input: Allows A103 to accept 5 to 30 VAC or VDC for count input


AC Power Supply: Provides 10 - 20 VDC @ 50mA for display backlighting and/or sensor. Requires connection to 115 or 230 VAC, 50/60 Hz

Model No.	Description
A103-000	A103 Totalizer
A103-001	A103 Add/Subtract Totalizer
A103-002	A103 Position Indicator (encoder input only)

The following option modules attach to the rear of A103 totalizers:

Model No.	AC Power Supply	Low Voltage Input	High Voltage Input
A103-A12	X		
A103-A17		X	
A103-A19	X	X	
A103-A10			X
A103-A14	X		X

Replacement Battery: 605472-0001
Panel Hole Punch: A103-A40

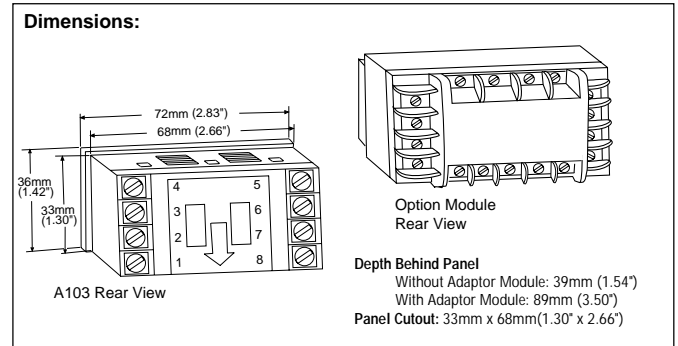

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [eagle signal manufacturer](#):

Other Similar products are found below :

[HP518B6](#) [A103-001](#) [0779555-216](#) [0791086-210](#) [0797586-220](#) [19105B6](#) [19107A6](#) [30E2CA120](#) [60SR3P06](#) [AB47A6](#) [B506-7002](#) [B506-7051](#)
[BRE10A601](#) [BRE10B6](#) [BRE7B6](#) [BRE9B6](#) [CG911A3](#) [CG915A3](#) [CG927A3](#) [CX312A6](#) [CX412A6](#) [FV30S00](#) [HG103A6](#) [HG104A6](#)
[HG109A6](#) [HG109A605](#) [HK400A6](#) [HK410B6](#) [HP50133](#) [HP510A601](#) [HP511A6](#) [HP514A601](#) [HP517A6](#) [HP518A601](#) [HP518A622](#) [HP53B6](#)
[HP54A6](#) [HP54B6](#) [HP54B622](#) [HP55A607](#) [HP55B6](#) [HP56A6](#) [HP56B6](#) [HZ170A601](#) [HZ172B6](#) [PM41S00](#) [TM1A60501](#) [TM2A612](#)
[TM2A615](#) [TM4A66701](#)