

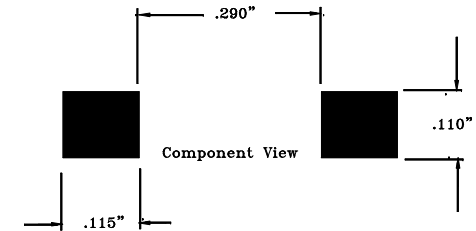


## RECOMMENDED PCB PAD LAYOUT


### TOP VIEW

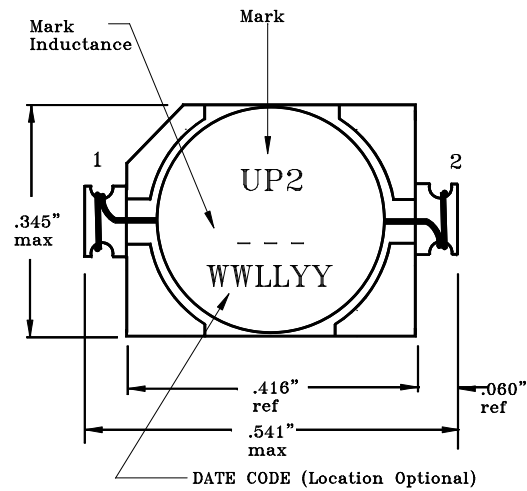

### SCHEMATIC



### FRONT VIEW

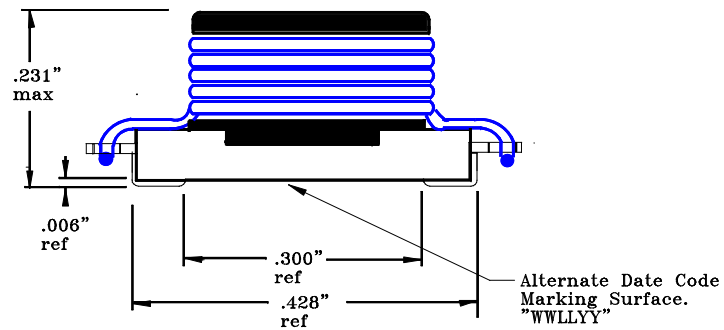

#### Notes:

- 1) Tolerances +/- .005" unless otherwise specified.
- 2) Stamping: Stamp unit on top of core as shown  
Line 1 UP2 ; line 2 Inductance (per family table chart ).
- 3) RoHS Compliant

Cooper Electronic Technologies

3601 Quantum Boulevard, Boynton Beach FL. 33426

UniPac2 SMT Inductor Line FINISHED  
ASSEMBLY/FAMILY TABLE.

SIZE	Drawing Number:	UP2-R Inductor Line
A	Revision Level:	J

Sheet 3 of 45

UniPac2 Family Table		Customer Information							
PN		Rated Inductance $\mu\text{H}$	OCL nominal $\pm 20\%$ $\mu\text{H}$ Note(1)		I rms Amperes Note(2)		Isat Amperes Note(3)		DCR ohms ( $\Omega$ ) maximum. @ 20°C.
UP2-R47-R		.47	.595		10.1		11.4		.0049
<b>*UP2-1R0-R</b>		<b>1.0</b>	<b>1.00</b>		<b>9.0</b>		<b>9.9</b>		<b>.0081</b>
UP2-1R5-R		1.5	1.46		8.1		7.9		.0103
<b>*UP2-2R2-R</b>		<b>2.2</b>	<b>2.39</b>		<b>6.9</b>		<b>6.1</b>		<b>.0115</b>
UP2-3R3-R		3.3	3.3***		6.5		5.1		.0138
<b>*UP2-4R7-R</b>		<b>4.7</b>	<b>4.77</b>		<b>5.7</b>		<b>4.2</b>		<b>.0173</b>
UP2-6R8-R		6.8	6.63		5.0		3.6		.0230
<b>**UP2-8R2-R</b>		<b>8.2</b>	<b>8.71</b>		<b>4.7</b>		<b>3.2</b>		<b>.0245</b>
<b>*UP2-100-R</b>		<b>10</b>	<b>9.73</b>		<b>4.3</b>		<b>3.3</b>		<b>.0299</b>
<b>*UP2-150-R</b>		<b>15</b>	<b>15.43</b>		<b>3.6</b>		<b>2.4</b>		<b>.0449</b>
<b>*UP2-220-R</b>		<b>22</b>	<b>22.50</b>		<b>2.9</b>		<b>2.0</b>		<b>.0644</b>
<b>*UP2-330-R</b>		<b>33</b>	<b>33.13</b>		<b>2.4</b>		<b>1.7</b>		<b>.0989</b>
<b>*UP2-470-R</b>		<b>47</b>	<b>48.65</b>		<b>1.9</b>		<b>1.4</b>		<b>.1461</b>
UP2-680-R		68	68.17		1.7		1.2		.1898
<b>**UP2-820-R</b>		<b>82</b>	<b>85.60</b>		<b>1.5</b>		<b>1.0</b>		<b>.2473</b>
UP2-101-R		100	102.60		1.4		.95		.2772
UP2-151-R		150	152.70		1.1		.78		.4244
UP2-221-R		220	230.00		.93		.62		.6360
UP2-331-R		330	338.00		.76		.51		.9775
<b>**UP2-471-R</b>		<b>471</b>	<b>471.8</b>		<b>.55</b>		<b>.44</b>		<b>1.31</b>

**Part number definition:**

First 3 characters = Product code and size.

Last 3 characters = Inductance in  $\mu\text{H}$ . R=decimal point.

If no R is present third character = # of zeros.

**Part Numbers that are \*BOLDED are stocked standard product. All others are not stocked but available upon request.**

**Part Numbers that are \*\*BOLDED are Non-catalog and non-stocked product but are available upon request.**

Notes:

- (1) Test parameters: 0.250Vrms, 100KHz, and 0.0Adc.
- (2) Rms current for a  $\Delta T$  of 40°C. at an ambient temperature of 85°C..
- (3) Peak current for approximateley a 10% rolloff.
- (4) Units supplied in tape and reel (600 units per 13" reel) packaging. EIA481 compliant.
- (5) OCL= Open circuit inductance .
- (6) Hipot: winding to core 300Vdc min.
- (7) \*\*\* UP2-3R3 to be tested to meet 3.3uH  $\pm 20\%$

Cooper Electronic Technologies

3601 Quantum Boulevard, Boynton Boulevard, FL 33426

UniPac2 SMT Inductor Line FINISHED ASSEMBLY/  
FAMILY TABLE.

SIZE	Drawing Number:	UP2-R Inductor Line
A	Revision Level: J	Sheet 5 of 45

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Eaton](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)  
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)