



Microsemi

SCOTTSDALE DIVISION

UES804 UES804HR2
UES805 UES805HR2
UES806 UES806HR2

ULTRAFAST RECTIFIERS,
High Efficiency, 50A™


www.Microsemi.com

DESCRIPTION

The UES804 series of ultrafast high-efficiency rectifiers is specifically designed for operation in power switching circuits operating at frequencies of 20 kHz or higher. These devices have demonstrated capability in passing power-stress testing to 25 thousand cycles with full-rated forward current turned on and off without a heat sink. This forces case temperature increases of 75 °C at which time the current is removed to simulate worst case applications. The switching times increase relatively little with temperature or at different currents.

APPEARANCE

DO-5

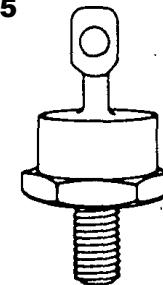

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

FEATURES

- Very Low Forward Voltage
- Very Fast Recovery Times
- High Reliability Screening Options with HR2 Suffix (ie. UES804HR2)
- Low Thermal Resistance
- Mechanically rugged
- Standard Polarity is Cathode to Case. For Reverse Polarity, Add Suffix R (ie. UES804R)

ABSOLUTE MAXIMUM RATINGS

- Peak Inverse Voltage, UES804, UES804HR2.....200 V
- Peak Inverse Voltage, UES805, UES805HR2.....300 V
- Peak Inverse Voltage, UES806, UES806HR2.....400 V
- Average DC Output Current, I_o @ $T_c = 100^\circ\text{C}$50 A
- Surge Current, 8.3 ms600 A
- Thermal Resistance, Junction to Case.....0.8 °C/W
- Operating and Storage Temp. Range.....-55°C to +150°C

APPLICATIONS / BENEFITS

- Power Switching Circuits 20 kHz and above with minimal parasitic switching losses
- Catch Diodes for Switching Regulators
- Output Rectifiers for High Frequency Square-Wave Inverters
- Extremely Robust in Power Cycling
- High Surge Capability
- Hermetically Sealed

MECHANICAL AND PACKAGING

- Industry Standard DO-5 (DO-203AB) Package with 11/16 inch Hex and 1/4-28 Threaded Stud
- Hermetically Sealed Metal and Glass Case Body
- Metal Surface Finish: Tin-Lead Plated
- Weight: 15.5 grams (approximate)
- Maximum Stud Torque: 30 inch pounds
- Marking: Part Number and Logo

ELECTRICAL CHARACTERISTICS

Microsemi Part Number		Working Peak Reverse Voltage V_{RWM}	Maximum Forward Voltage V_F @ 50 A $t_p = 300 \mu\text{s}$	Maximum Reverse Current I_R @ V_{RWM}	Maximum Reverse Recovery Time* t_{rr}
UES804	UES804HR2	200 V	$T_c = 25^\circ\text{C}$	$T_c = 125^\circ\text{C}$	$T_c = 25^\circ\text{C}$
UES805	UES805HR2	300 V	1.25 V	1.15 V	$T_c = 125^\circ\text{C}$
UES806	UES806HR2	400 V		70 μA	30 mA

* Measured in circuit $I_F = 0.5$ A, $I_R = 1$ A, $I_{REC} = 0.25$ A

UES804/804HR2
UES805/805HR2
UES806/806HR2



Microsemi







SCOTTSDALE DIVISION

UES804 UES804HR2
UES805 UES805HR2
UES806 UES806HR2

ULTRAFAST RECTIFIERS,
High Efficiency, 50A™

www.**Microsemi**.com

GRAPHS and CIRCUIT

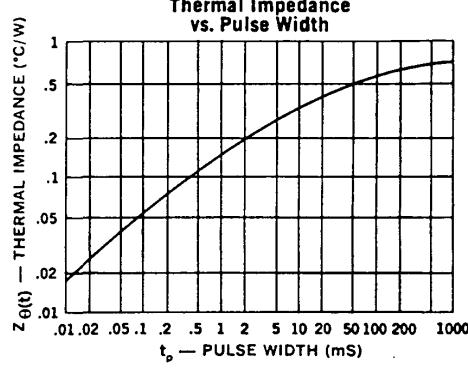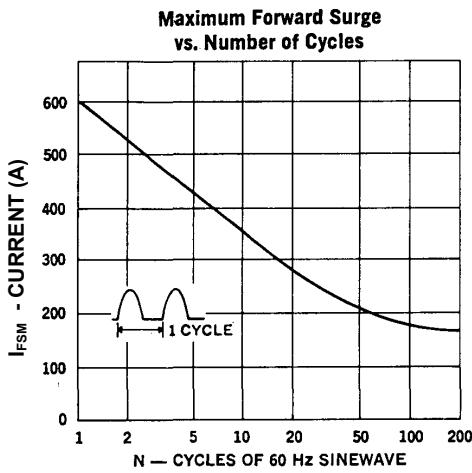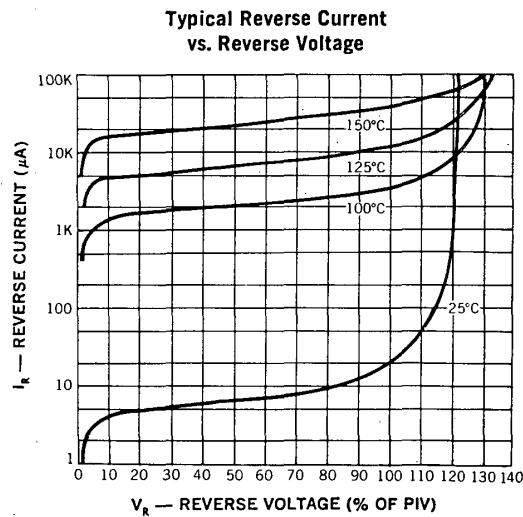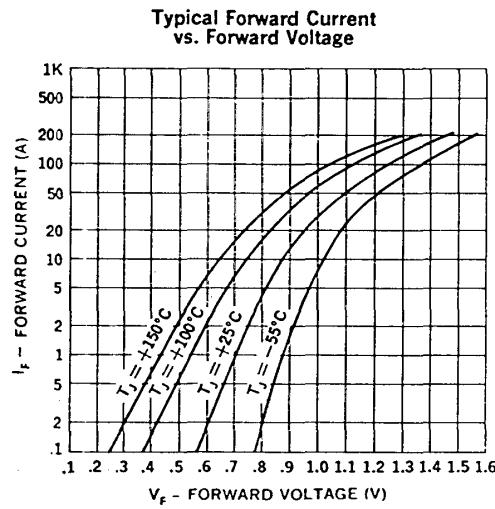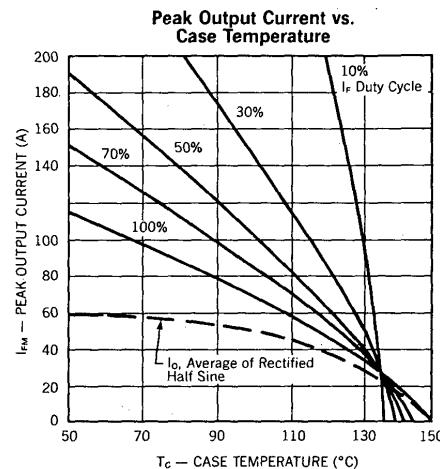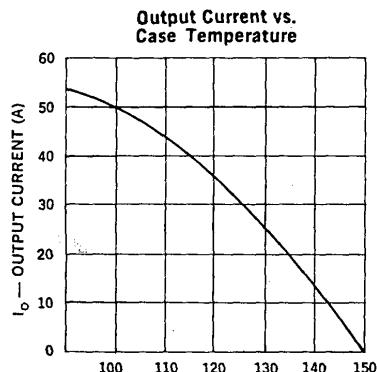



Microsemi


SCOTTSDALE DIVISION

UES804 UES804HR2
UES805 UES805HR2
UES806 UES806HR2

ULTRAFAST RECTIFIERS,
High Efficiency, 50A™

www.Microsemi.com

Reverse-Recovery Circuit

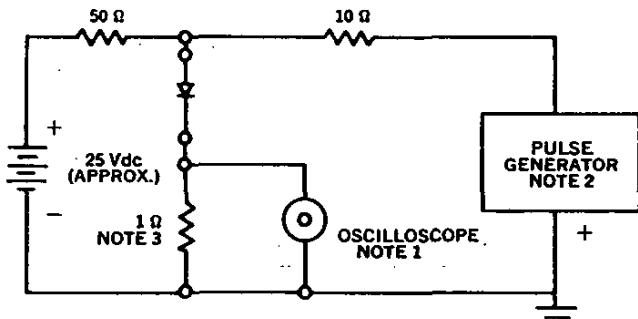

NOTES:


1. Oscilloscope: Rise time \leq 3ns; input impedance = 50Ω.
2. Pulse Generator: Rise time \leq 8ns; source impedance 10Ω.
3. Current viewing resistor, non-inductive, coaxial recommended.

OPTIONAL HIGH RELIABILITY (HR2) SCREENING

The following tests are performed on 100% of the devices.

SCREEN	MIL-STD-750 METHOD	CONDITIONS
1. High Temperature	1032	24 Hours @ TA = 150°C
2. Temperature Cycle	1051	F, 20 Cycles, -55 to +150°C. No dwell required @ 25°C, T \geq 10 min. @ extremes
3. Hermetic Seal a. Fine Leak b. Gross Leak	1071	H, Helium C, Liquid
4. Thermal Impedance	3101	
5. Interim Electrical Parameters	GO/NO GO	As applicable
6. High Temperature Reverse Bias (HTRB)	As Applicable	t= 48 hours, Tc = 125°C with applicable bias conditions
7. Final Electrical Parameters	GO/NO GO	As applicable

MECHANICAL SPECIFICATIONS

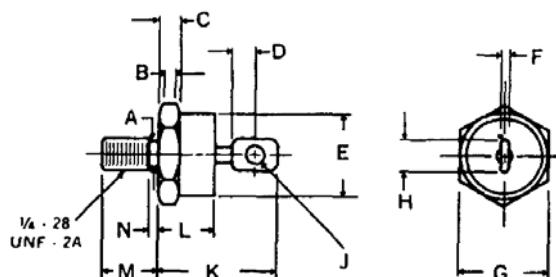

	INCHES	MILLIMETERS
A	.225 +/- .005	5.72 +/- 0.13
B	.060 MIN.	1.52 MIN.
C	.156 +/- .020	3.96 +/- 0.51
D	.156 MIN. FLAT	3.96 MIN. FLAT
E	.667 DIA. MAX	16.94 DIA. MAX
F	.090 MAX	2.29 MAX.
G	.677 +/- .010	17.20 +/- 0.25
H	.375 MAX.	9.53 MAX.
J	.140 MIN. DIA.	3.56 MIN. DIA.
K	1.000 MAX.	25.40 MAX.
L	.450 MAX.	11.43 MAX.
M	.438 +/- .015	11.13 +/- 0.38
N	.078 MAX.	1.98 MAX.

Notes:

1. Maximum stud torque: 30 inch pounds.
2. Maximum tension (90°) anode terminal 15 pounds for 30 seconds

UES804/804HR2
UES805/805HR2
UES806/806HR2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by Microsemi manufacturer:

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DLA11C-TR-E](#) [DSA17G](#) [1N4005-TR](#) [BAV199-TP](#) [UFS120Je3/TR13](#)
[JANS1N6640US](#) [VS-80-1293](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [DSP10G-TR-E](#) [067907F](#) [MS306](#) [ND104N08K](#) [SPA2003-B-D-A01](#) [VS-80-6193](#) [VS-66-9903](#) [VGF0136AB](#) [US2JFL-TP](#) [UFS105Je3/TR13](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#) [RF301B2STL](#)
[RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#) [GS2K-LTP](#)
[D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [STTH20P035FP](#) [VS-8EWS12S-M3](#) [VS-12FL100S10](#)
[ACGRA4001-HF](#) [MUR420GP-TP](#)