




Breakout Board IoT Expansion Card

Product Specification

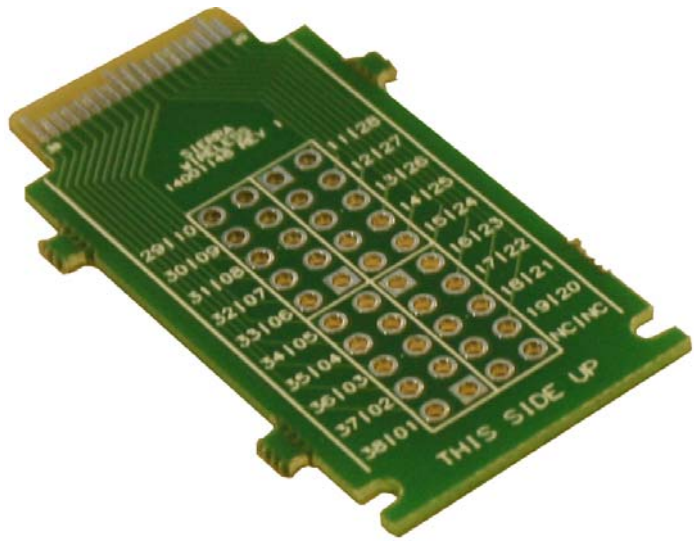

Important Notice

Due to the nature of wireless communications, transmission and reception of data can never be guaranteed. Data may be delayed, corrupted (i.e., have errors) or be totally lost. Although significant delays or losses of data are rare when wireless devices such as the Sierra Wireless modem are used in a normal manner with a well-constructed network, the Sierra Wireless modem should not be used in situations where failure to transmit or receive data could result in damage of any kind to the user or any other party, including but not limited to personal injury, death, or loss of property. Sierra Wireless accepts no responsibility for damages of any kind resulting from delays or errors in data transmitted or received using the Sierra Wireless modem, or for failure of the Sierra Wireless modem to transmit or receive such data.

Safety and Hazards

Do not operate the Sierra Wireless modem in areas where blasting is in progress, where explosive atmospheres may be present, near medical equipment, near life support equipment, or any equipment which may be susceptible to any form of radio interference. In such areas, the Sierra Wireless modem **MUST BE POWERED OFF**. The Sierra Wireless modem can transmit signals that could interfere with this equipment.

Do not operate the Sierra Wireless modem in any aircraft, whether the aircraft is on the ground or in flight. In aircraft, the Sierra Wireless modem **MUST BE POWERED OFF**. When operating, the Sierra Wireless modem can transmit signals that could interfere with various onboard systems.

Note: Some airlines may permit the use of cellular phones while the aircraft is on the ground and the door is open. Sierra Wireless modems may be used at this time.

The driver or operator of any vehicle should not operate the Sierra Wireless modem while in control of a vehicle. Doing so will detract from the driver or operator's control and operation of that vehicle. In some states and provinces, operating such communications devices while in control of a vehicle is an offence.

Limitation of Liability

The information in this manual is subject to change without notice and does not represent a commitment on the part of Sierra Wireless. SIERRA WIRELESS AND ITS AFFILIATES SPECIFICALLY DISCLAIM LIABILITY FOR ANY AND ALL DIRECT, INDIRECT, SPECIAL, GENERAL, INCIDENTAL, CONSEQUENTIAL, PUNITIVE OR EXEMPLARY DAMAGES INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS OR REVENUE OR ANTICIPATED PROFITS OR REVENUE ARISING OUT OF THE USE OR INABILITY TO USE ANY SIERRA WIRELESS PRODUCT, EVEN IF SIERRA WIRELESS AND/OR ITS AFFILIATES HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR THEY ARE FORESEEABLE OR FOR CLAIMS BY ANY THIRD PARTY.

Notwithstanding the foregoing, in no event shall Sierra Wireless and/or its affiliates aggregate liability arising under or in connection with the Sierra Wireless product, regardless of the number of events, occurrences, or claims giving rise to liability, be in excess of the price paid by the purchaser for the Sierra Wireless product.

Patents

This document contains information which is proprietary to Sierra Wireless Inc. and is licensed pursuant to Creative Commons Attribution 4.0 International License.

Document details

Title: Wi-Fi IoT Expansion Card Product Specification

Author: Sierra Wireless

Source: <http://mangoh.io/>

Copyright

© 2016 Sierra Wireless. Licensed under the Creative Commons Attribution 4.0 license, <http://creativecommons.org/licenses/by/4.0/>



Disclaimer

Indicate any modifications made to the original document.

Trademarks

mangOH™ and the mangOH logo are trademarks of Sierra Wireless.

Other trademarks are the property of their respective owners.

Revision History

| Revision number | Release date | Changes |
|-----------------|--------------|---------|
| 1 | October 2016 | Created |

1: Breakout Board IoT Expansion Card Specification

1.1 Overview

The Sierra Wireless Breakout Board IoT Expansion Card is an open hardware reference design based on the IoT Expansion Card specification.

This expansion card provides the following functionality:

- Breakout board (test points) for testing IoT interfaces

1.2 Specifications

The following tables describe key features and specifications of the Breakout Board IoT Expansion Card:

- [Table 1-1, Hardware Features](#), on page 4
- [Table 1-2, IoT Expansion Card Specifications](#), on page 5
- [Table 1-3, Software Interface Support](#), on page 5

Table 1-1: Hardware Features

| Feature | Notes |
|-------------|---|
| Test points | <ul style="list-style-type: none"> • 40 test points in four groups of 10 (38 used for IoT, 2 NC) • 10-pin connectors can be added to each group |

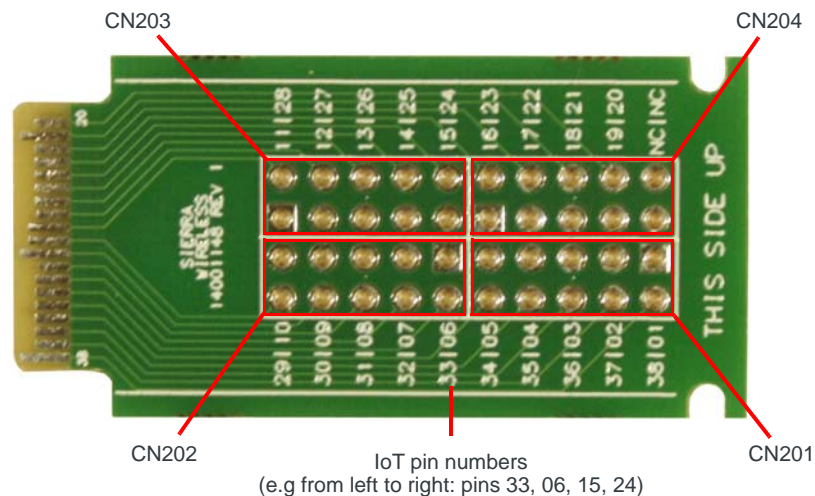


Figure 1-1: Breakout Board IoT Expansion Card Top View

Table 1-2: IoT Expansion Card Specifications

| Parameter | Value/Range | Notes |
|-------------------------------------|--|---|
| Power Specifications | | |
| Power Category | 1 | Power consumption < 2.5 W |
| Power Supplies (Voltage Rails) | 1.8V 3.3V 5.0V | |
| Mechanical Specifications | | |
| Height Category | 1 | Top height ≤14.00 mm |
| Dimensions | Length: 42.50 mm Width: 22.30 mm | Per IoT Expansion Card specification |
| # of slots required | 1 | |
| mangOH Green Slot Restriction | Any slot | |
| Hot Swappable | No | |
| Environmental Specifications | | |
| Ambient Operating Temperature | Expansion Card— Temperature not tested. | Reference design. Not tested for compliance with IoT Expansion Card Design Specification. |

Table 1-3: Software Interface Support

| Interface | Supported |
|------------------|-----------|
| USB | Yes |
| SDIO | Yes |
| UART | Yes |
| SPI | Yes |
| n_RESET | Yes |
| ADC | Yes |
| I ² C | Yes |
| PCM | Yes |
| I2S | Yes |
| GPIO | Yes |
| n_CARD_DETECT | Yes |
| PPS | Yes |

1.3 Schematics

Schematics for the Breakout Board IoT Expansion Card and other expansion cards are available at <http://mangoh.io>.


1.4 Pinout

Table 1-4: Pins Supported

| Pin | Signal | Supported | Notes |
|-----|--------------|-----------|-------|
| 1 | VCC_5VC | Yes | |
| 2 | USB_D+ | Yes | |
| 3 | USB_D- | Yes | |
| 4 | GND | Yes | |
| 5 | SDIO_CLK | Yes | |
| 6 | SDIO_CMD | Yes | |
| 7 | SDIO_DAT3/CD | Yes | |
| | | Yes | |
| 8 | SDIO_DAT2 | Yes | |
| 9 | SDIO_DAT1 | Yes | |
| 10 | SDIO_DAT0 | Yes | |
| 11 | VCC_1V8 | Yes | |
| 12 | UART_TXD | Yes | |
| 13 | UART_RXD | Yes | |
| 14 | UART_CTS | Yes | |
| | | Yes | |
| 15 | UART_RTS | Yes | |
| | | Yes | |
| 16 | SPI_CLK | Yes | |
| | | Yes | |
| 17 | SPI_MISO | Yes | |
| | | Yes | |
| 18 | SPI_MOSI | Yes | |
| 19 | SPI_SS/MRDY | Yes | |

| Pin | Signal | Supported | Notes |
|-----|---------------|-----------|-------|
| 20 | ADC0 | Yes | |
| 21 | GND | Yes | |
| 22 | I2C_SDA | Yes | |
| 23 | I2C_SCL | Yes | |
| 24 | GPIO_1 | Yes | |
| 25 | GPIO_2 | Yes | |
| 26 | GPIO_3 | Yes | |
| | SPI_SRDY | Yes | |
| 27 | GPIO_4 | Yes | |
| 28 | VCC_3V3 | Yes | |
| 29 | VCC_3V3 | Yes | |
| 30 | GND | Yes | |
| 31 | n_CARD_DETECT | Yes | |
| 32 | n_RESET | Yes | |
| 33 | PCM_DIN | Yes | |
| | I2S_IN | Yes | |
| 34 | PCM_DOUT | Yes | |
| | I2S_OUT | Yes | |
| 35 | PCM_SYNC | Yes | |
| | I2S_WC | Yes | |
| 36 | PCM_CLK | Yes | |
| | I2S_CLK | Yes | |
| 37 | PPS | Yes | |
| 38 | GND | Yes | |

1.5 System Block

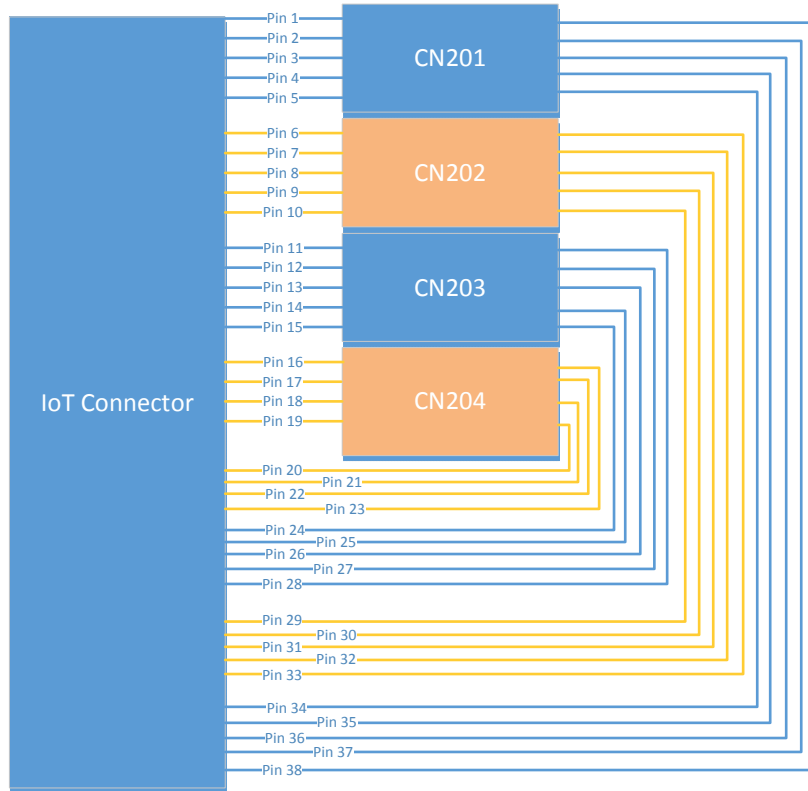

Note: Colors are used to identify groups of pins. No other meaning is implied.

Figure 1-2: Breakout Board IoT Expansion Card System Block

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [embest](#) manufacturer:

Other Similar products are found below :

[CAM8000-D MODULE](#) [SBC8118 WITH 4.3"LCD](#) [DEVKIT8500D WITHOUT LCD](#) [MARS BOARD WITH 9.7"LCD](#) [CAM8200-U MODULE](#) [COLINKEX](#) [MINI6245 PROCESSOR CARD](#) [EMBEDDED PI](#) [EVK-PH8800](#) [AMG8832EK](#) [SBC-EC8800](#) [1401148](#)