

# Mini Evaluation Board : AEM10941



e-peas  
semiconductors

*Please follow the next steps when using the AEM10941 mini evaluation board*



- Step 1 :** MPP configuration (DS page 12)
- Step 2 :** System configuration (DS page 11)
- Step 3 :** LDO outputs configuration (DS page 9)
- Step 4 :** Cold-start configuration (DS page 12)
- Step 5 :** Balun for dual-cells supercapacitor (DS page 10)
- Step 6 :** Primary battery configuration (DS page 12)
- Step 7 :** Connect the storage element
- Step 8 :** Connect the primary battery
- Step 9 :** Connect the loads
- Step 10 :** Connect the source
- Step 11 :** Status

*For more information : [support@e-peas.com](mailto:support@e-peas.com)*

# Mini Evaluation Board : AEM10941




e-peas  
semiconductors

1.

SELMPP1-0	MPPT Ratio (%)
0-0	70
0-1	75
1-0	85
1-1	90

2.

CFG2-1-0	Storage element type
H-H-H	Li-ion battery
H-H-L	Solid state Battery
H-L-H	Li-ion / NiMH battery
H-L-L	Single cell supercapacitor
L-H-H	Dual cell supercapacitor
L-H-L	Dual cell supercapacitor
L-L-H	LifePo4
L-L-L	Custom mode

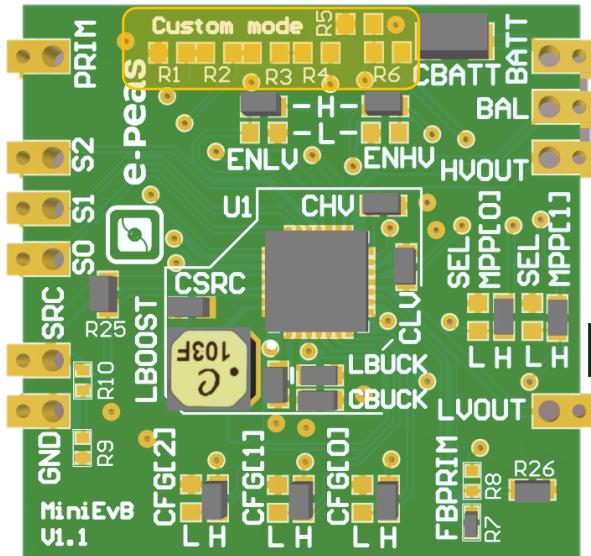

1. MPP configuration  
(DS page 12)

2. System configuration (DS page 11)

Please see DS page 11 « Custom mode »

and use the R1 – R6 resistors


# Mini Evaluation Board : AEM10941



e-peas  
semiconductors

3.

ENLV	ENHV	LVOUT	HVOUT
1	1	Enabled	Enabled
1	0	Enabled	Disabled
0	1	Disabled	Enabled
0	0	Disabled	Disabled

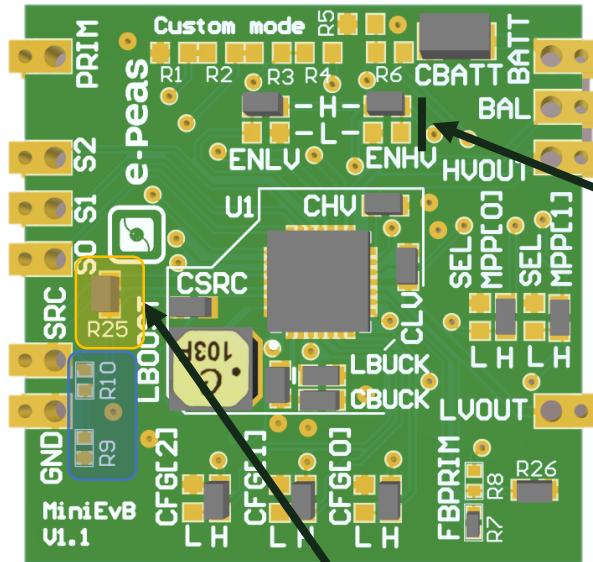

3. LDO outputs configuration  
(DS page 9)

4.

Solder resistor « OR R25 » if not used  
else :

$$100 \text{ k}\Omega \leq RC = R9 + R10 \leq 10 \text{ M}\Omega$$

CS = coldstart voltage (> 380mV)

$$R9 = \frac{0.38}{CS} * RC$$

$$R10 = RC - R9$$

4. Cold-start configuration (DS page 12)

# Mini Evaluation Board : AEM10941




e-peas  
semiconductors

## 5.

If dual-cell supercapacitor :  
BAL connected to the node  
between the supercapacitors  
**BAL = ToCN**

If not :  
**BAL = GND**

Do not leave floating PRIM or BAL

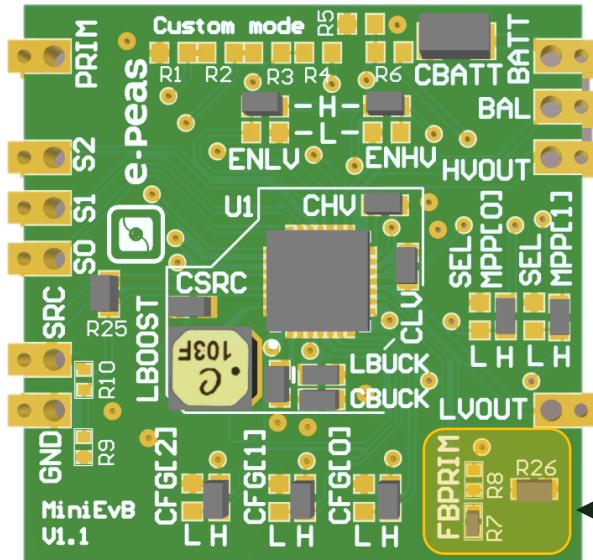

5. Balun for dual-cells supercapacitor (DS page 10)

## 6.

Solder resistor « OR R26 » if no primary battery else

$$100 \text{ k}\Omega \leq RP = R7 + R8 \leq 500 \text{ k}\Omega$$

VPRIM\_MIN = minimum voltage on PRIM

$$R7 = \left( \frac{VPRIM\_MIN}{4} * RP \right) / 2.2 \text{ V}$$


$$R8 = RP - R7$$

6. Primary battery configuration (DS page 12)

# Mini Evaluation Board : AEM10941




e-peas  
semiconductors

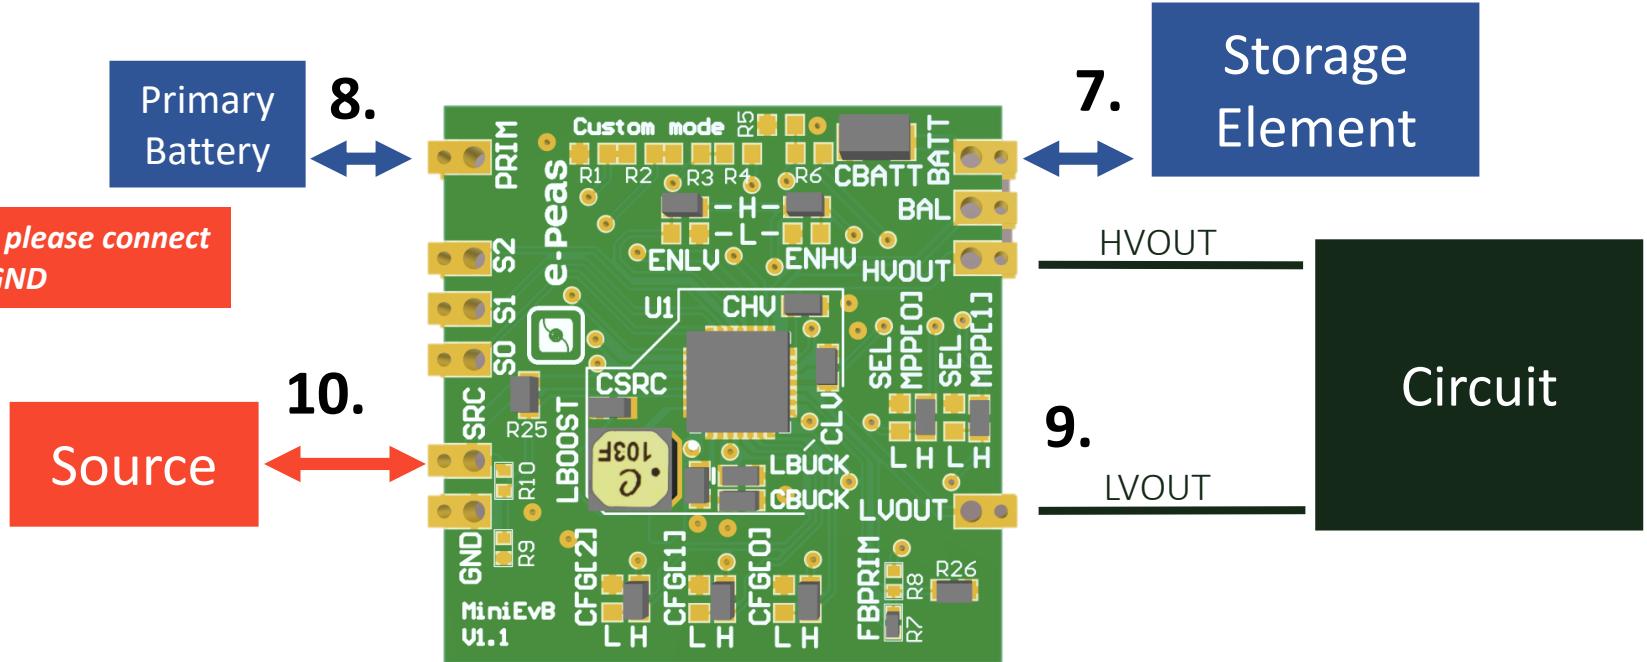

For more information : [support@e-peas.com](mailto:support@e-peas.com)



11. AEM Status

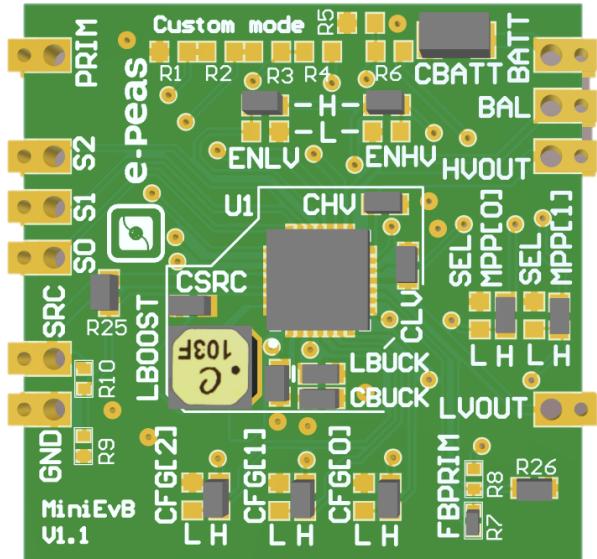

11.

**STATUS0** = Asserted when the LDOs can be enabled

**STATUS1** = Asserted if the battery voltage falls under Vovdis

**STATUS2** = Asserted when the AEM performs the MPP tracking

Visit us on

**[www.e-peas.com](http://www.e-peas.com)**

Or contact us at

[support@e-peas.com](mailto:support@e-peas.com)    [sales@e-peas.com](mailto:sales@e-peas.com)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Power Management IC Development Tools category:***

***Click to view products by e-peas manufacturer:***

Other Similar products are found below :

[EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [124352-HMC860LP3E](#) [DA9063-EVAL](#) [ADP122-3.3-EVALZ](#) [ADP130-0.8-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1740-1.5-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [AS3606-DB](#) [BQ25010EVM](#) [BQ3055EVM](#) [ISLUSBI2CKIT1Z](#) [LM2734YEVAL](#) [LP38512TS-1.8EV](#) [EVAL-ADM1186-1MBZ](#) [EVAL-ADM1186-2MBZ](#) [ADP122UJZ-REDYKIT](#) [ADP166Z-REDYKIT](#) [ADP170-1.8-EVALZ](#) [ADP171-EVALZ](#) [ADP1853-EVALZ](#) [ADP1873-0.3-EVALZ](#) [ADP198CP-EVALZ](#) [ADP2102-1.0-EVALZ](#) [ADP2102-1-EVALZ](#) [ADP2107-1.8-EVALZ](#) [ADP5020CP-EVALZ](#) [CC-ACC-DBMX-51](#) [ATPL230A-EK](#) [MIC23250-S4YMT EV](#) [MIC26603YJL EV](#) [MIC33050-SYHL EV](#) [TPS60100EVM-131](#) [TPS65010EVM-230](#) [TPS71933-28EVM-213](#) [TPS72728YFFEVM-407](#) [TPS79318YEQEVM](#) [ISL85033EVAL2Z](#) [UCC28810EVM-002](#) [XILINXPWR-083](#)