

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>
**QUICK REFERENCE DATA AXIAL-LEADED HERMETICALLY SEALED STANDARD RECOVERY RECTIFIER DIODE**

- $V_R = 200 - 1000V$
- $I_F = 2.0A$
- $t_{rr} = 2\mu s$
- $V_F = 1.1V$
- Low reverse leakage current
- Hermetically sealed in Metoxillite fused metal oxide
- Good thermal shock resistance
- Low forward voltage drop
- Avalanche capability.


**ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)**

	Symbol	1N5614 S2M	1N5616 S4M	1N5618 S6M	1N5620 S8M	1N5622 S0M	Unit
Working reverse voltage	$V_{RWM}$	200	400	600	800	1000	V
Repetitive reverse voltage	$V_{RRM}$	200	400	600	800	1000	V
Average forward current (@ 55°C, lead length 0.375")	$I_{F(AV)}$	←————— 2.0 —————→					A
Repetitive surge current (@ 55°C in free air, lead length 0.375")	$I_{FRM}$	←————— 10 —————→					A
Non-repetitive surge current ( $t_p = 8.3mS$ , @ $V_R$ & $T_{jmax}$ )	$I_{FSM}$	←————— 30 —————→					A
Storage temperature range	$T_{STG}$	←————— -65 to +175 —————→					°C
Operating temperature range	$T_{OP}$	←————— -65 to +175 —————→					°C

**MECHANICAL**

These products are qualified to MIL-PRF-19500/427 and are preferred parts as listed in MIL-STD-701. They can be supplied fully released as JAN, JANTX, JANTXV and JANS versions.

These products are available in Europe to DEF STAN 59-61 (PART 80)/029 to F and FX levels.

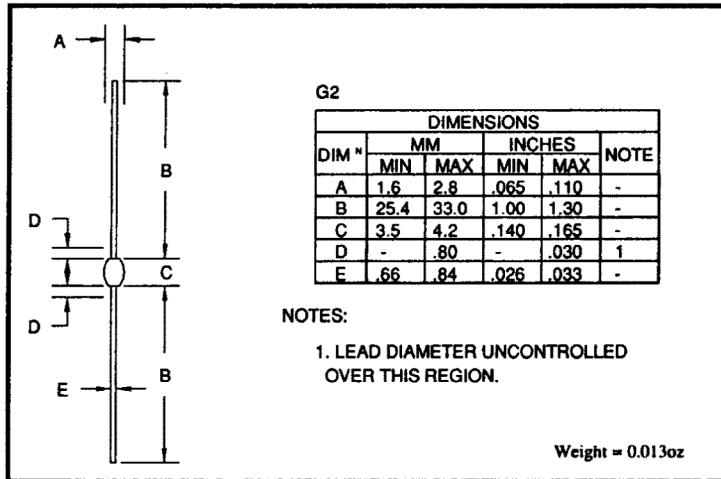

January 7, 1998

**CHARACTERISTICS** (@ 25°C unless otherwise specified)

	Symbol	1N5614 S2M	1N5616 S4M	1N5618 S6M	1N5620 S8M	1N5622 S0M	Unit
Average forward current (sine wave) - max. pcb mounted; TA = 55°C - max. L = 3/8"; TL = 55°C	IF(AV)	1.0					A
I <sup>2</sup> t for fusing (t = 8.3mS) max.	I <sup>2</sup> t	2.0					A <sup>2</sup> s
Forward voltage drop max. @ IF = 1.0A, T <sub>j</sub> = 25°C	V <sub>F</sub>	1.1					V
Reverse current max. @ V <sub>RWM</sub> , T <sub>j</sub> = 25°C @ V <sub>RWM</sub> , T <sub>j</sub> = 100°C	I <sub>R</sub>	0.5					μA
	I <sub>R</sub>	25					μA
Reverse recovery time max. 0.5A IF to 1.0A I <sub>R</sub> . Recovers to 0.25A I <sub>RR</sub> .	t <sub>rr</sub>	2.0					μs
Junction capacitance typ. @ V <sub>R</sub> = 5V, f = 1MHz	C <sub>j</sub>	23					pF
Thermal resistance - junction to lead Lead length = 0.375"	R <sub>θJL</sub>	36					°C/W
Lead length = 0"	R <sub>θJL</sub>	7					°C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1 oz. copper.	R <sub>θJA</sub>	95					°C/W

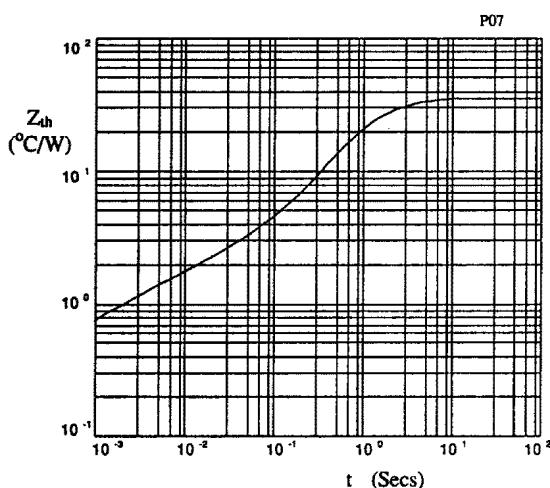


Fig 1. Transient thermal impedance characteristic.

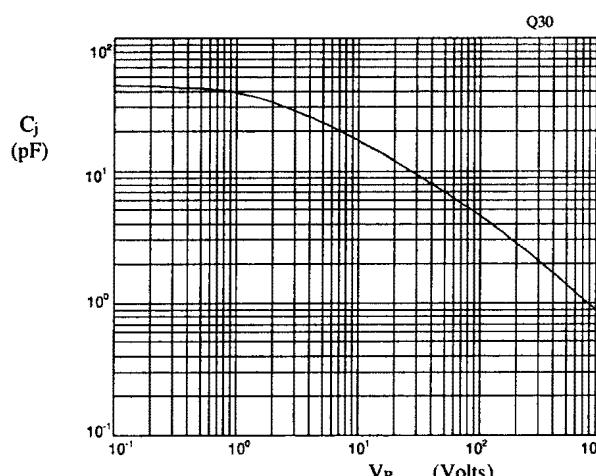


Fig 2. Typical junction capacitance as a function of reverse voltage.

January 7, 1998

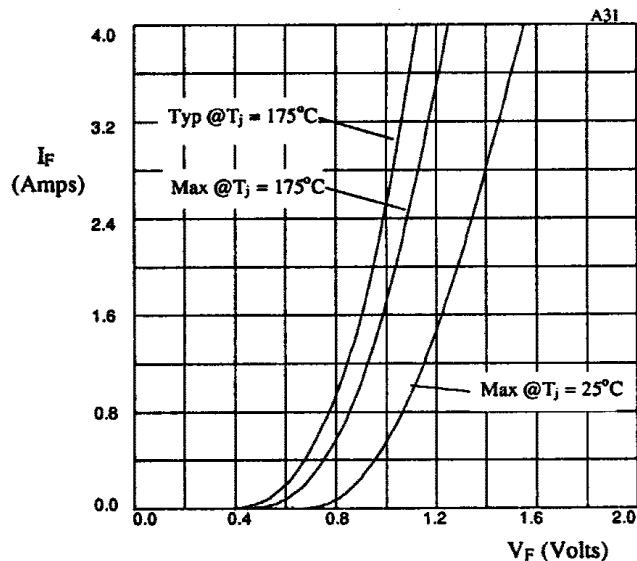


Fig 3. Forward voltage drop as a function of forward current.

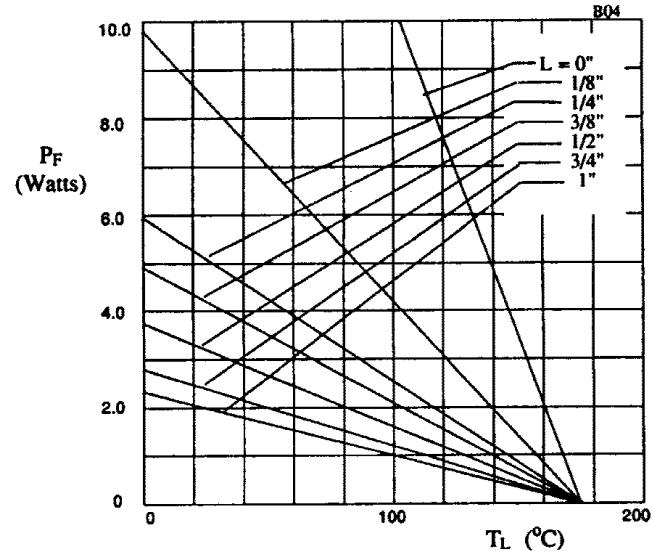


Fig 4. Maximum power versus lead temperature.

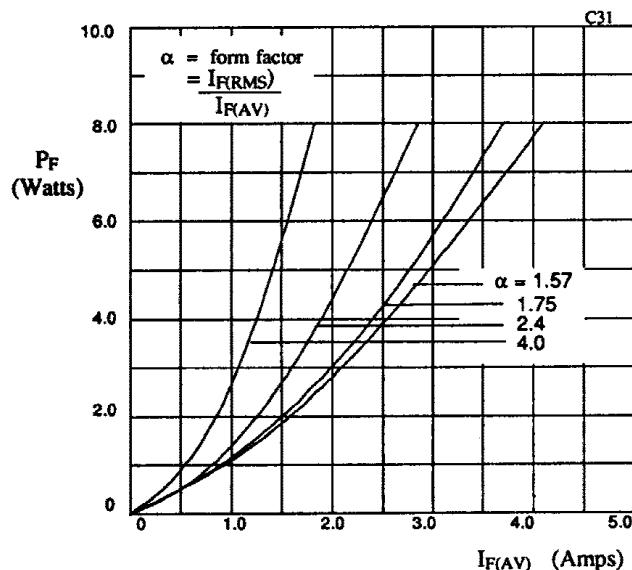


Fig 5. Forward power dissipation as a function of forward current, for sinusoidal operation.

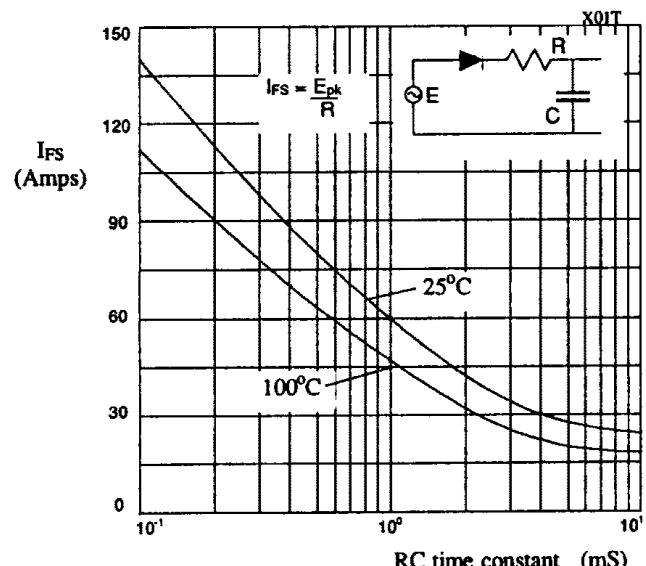


Fig 6. Maximum ratings for capacitive loads.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by Semtech manufacturer:***

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-TP](#)  
[MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)