

## 28V, 2A Buck Constant Current Switching Regulator for White LED




### General Description

The FP7102 is a PWM control buck converter designed to provide a simple, high efficiency solution for driving high power LEDs. With a 0.25V reference voltage feedback control to minimize power dissipation, an external resistor sets the current as needed for driving various types of LEDs. The FP7102 includes a high current P-MOSFET to realize high efficiency and excellent transient characteristics. The PWM control circuit is able to change the duty ratio linearly from 0 up to 100%. Other features include user accessible EN pin for enabling, thermal shutdown, cycle-by-cycle current limit and over current protection.

### Features


- Wide Supply Voltage Operating Range: 3.6 to 28V
- Built-in P-MOSFET for 2A Loading Capability
- Precision Feedback Reference Voltage: 0.25V (2%)
- Low Current Consumption: 4mA
- Internal Fixed Oscillator Frequency: 320KHz (Typ.)
- Internal Soft-Start Function (SS)
- Over Current Protection
- Package: SOP-8L & SOP-8L(EP)

### Typical Application Circuit

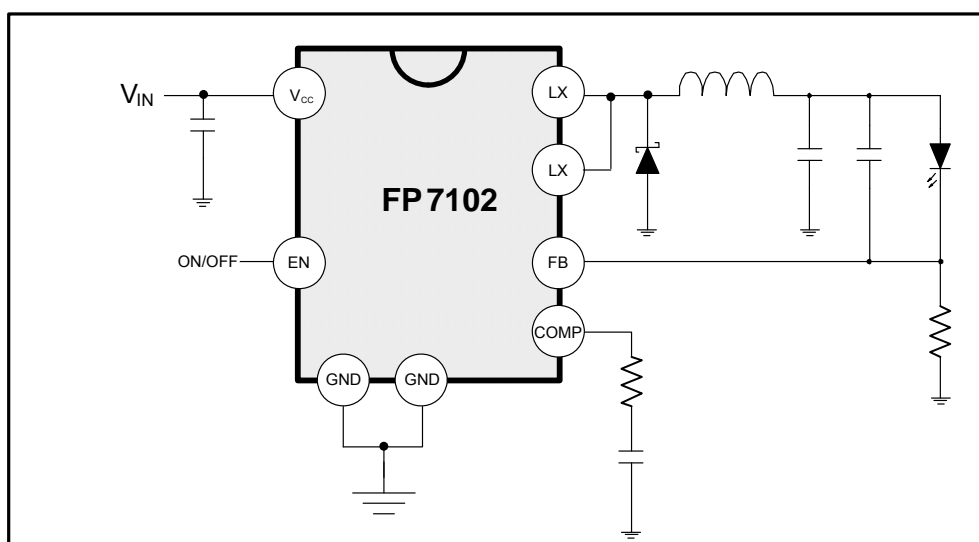

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.


**Function Block Diagram**

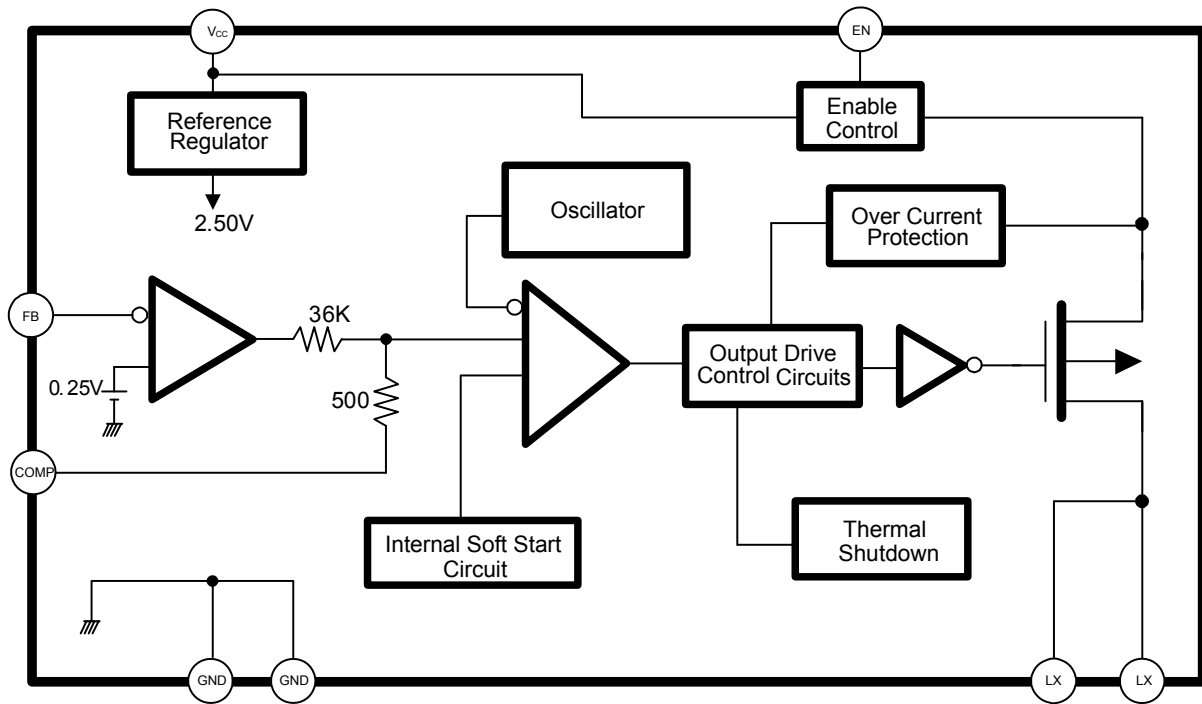

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.


## Pin Descriptions

### SOP- 8L

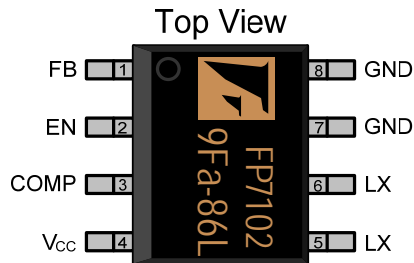


Name	No.	I / O	Description
FB	1	I	Error Amplifier Inverting Input
EN	2	I	Enable Control
COMP	3	O	Error Amplifier Compensation Output
V <sub>CC</sub>	4	P	IC Power Supply (PMOS Source)
LX	5	P	PMOS High Current Output
LX	6	P	PMOS High Current Output
GND	7	O	IC Ground
GND	8	O	IC Ground

### SOP- 8L (EP)

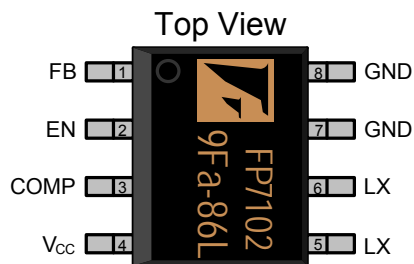


Name	No.	I / O	Description
FB	1	I	Error Amplifier Inverting Input
EN	2	I	Enable Control
COMP	3	O	Error Amplifier Compensation Output
V <sub>CC</sub>	4	P	IC Power Supply (PMOS Source)
LX	5	P	PMOS High Current Output
LX	6	P	PMOS High Current Output
GND	7	O	IC Ground
GND	8	O	IC Ground
EP	9	P	Exposed PAD. Must connect to LX



## Marking Information

### SOP- 8L & SOP-8L (EP)

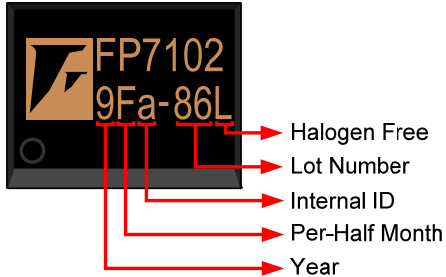

**Halogen Free:** Halogen free product indicator

**Lot Number:** Wafer lot number's last two digits

For Example: 132386TB → 86

**Internal ID:** Internal Identification Code

**Per-Half Month:** Production period indicated in half month time unit

For Example: January → A (Front Half Month), B (Last Half Month)

February → C (Front Half Month), D (Last Half Month)

**Year:** Production year's last digit


## Ordering Information

Part Number	Operating Temperature	Package	MOQ	Description
FP7102DR-LF	-25°C ~ +85°C	SOP-8L	2500EA	Tape & Reel
FP7102XR-LF	-25°C ~ +85°C	SOP-8L (EP)	2500EA	Tape & Reel

## Absolute Maximum Ratings

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power Supply Voltage	$V_{IN}$				28	V
Output Source Current					2	A
Error Amplifier Inverting Input			-0.3		+1.2	V
Allowable Dissipation		$T_A \leq +25^\circ\text{C}$			650	mW
Thermal Resistance Junction to Ambient	$\theta_{JA}$				+175	$^\circ\text{C} / \text{W}$
Thermal Resistance Junction to Case	$\theta_{JC}$				+45	$^\circ\text{C} / \text{W}$
ESD Susceptibility		HBM (Human Body Mode)		2		KV
		MM (Machine Mode)		200		V
Storage Temperature			-55		+125	$^\circ\text{C}$
Lead Temperature (soldering, 10 sec)					+260	$^\circ\text{C}$

## IR Re-flow Soldering Curve

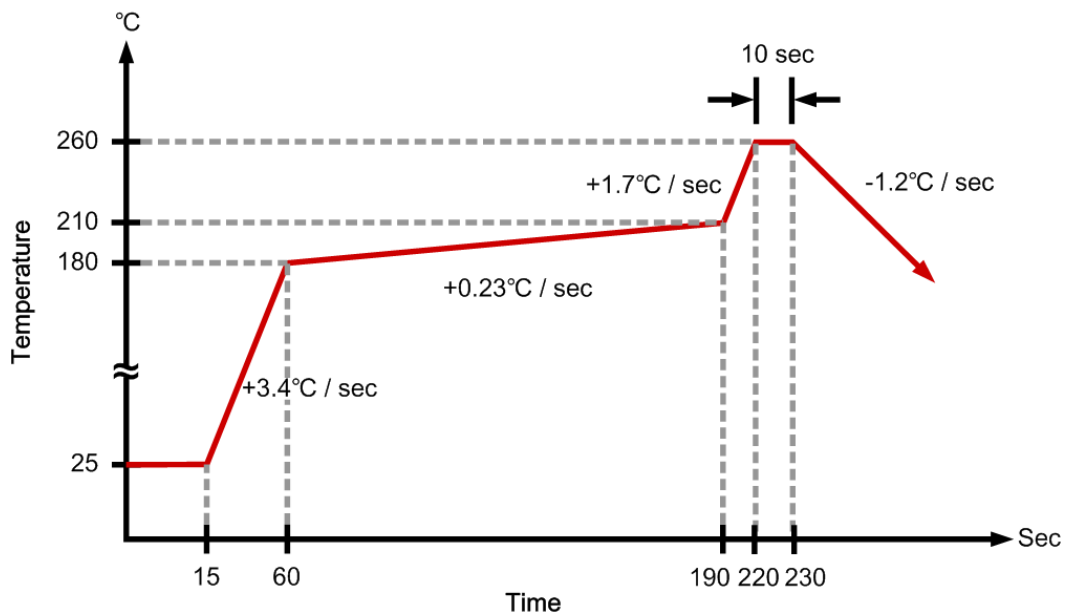

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

## Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply Voltage	$V_{IN}$		3.6		28	V
Operating Temperature			-25		85	°C

## DC Electrical Characteristics ( $V_{CC}=6V$ , $T_A=25^\circ C$ , unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Reference</b>						
Output Voltage	$V_{REF}$	FB connected to COMP	0.245	0.25	0.255	V
Input Regulation	$\Delta V_{REF}$	$V_{CC}=3.6V$ to $25V$		2	12.5	mV
Output Voltage Change with Temperature	$\Delta V_{REF} / V_{REF}$	$T_A = -25^\circ C$ to $25^\circ C$		1	2	%
		$T_A = 25^\circ C$ to $85^\circ C$		1	2	
<b>Oscillator Section</b>						
Oscillation Frequency	f			320		KHz
Frequency Change with Voltage	$\Delta f / \Delta V$	$V_{CC}=3.6V$ to $25V$		5		%
Frequency Change with Temperature	$\Delta f / \Delta T$	$T_A = -25^\circ C$ to $+85^\circ C$		5		%
<b>Error Amplifier Section</b>						
Input Bias Current	$I_B$		-1.0	-0.2	1.0	$\mu A$
Voltage Gain	$A_V$			100		V / V
Frequency Bandwidth	BW	$A_V=0$ dB		6		MHz
Output Voltage Swing Positive	$V_{POS}$		1.7	2		V
Output Voltage Swing Negative	$V_{NEG}$			0.1	0.2	V
Output Source Current	$I_{SOURCE}$	$V_{COMP}=200mV$	-15	-30		$\mu A$
Output Sink Current	$I_{SINK}$	$V_{COMP}=200mV$	15	30		$\mu A$
<b>Idle Period Adjustment Section</b>						
Maximum Duty Cycle	$T_{DUTY}$	$V_{FB}=0.2V$		100		%
<b>Output Section</b>						
PMOS D-S Voltage	$V_{DSS}$	$V_{COMP}=0.1V$		-20		V
PMOS Source Current	$I_D$			-2		A
PMOS On Resistance	$R_{DS(ON)}$	$V_{CC}=5.0V$ , $V_{FB}=0V$		70	150	m $\Omega$
		$V_{CC}=10V$ , $V_{FB}=0V$		42	90	
Output Leakage Current	$I_L$			5		$\mu A$
<b>Thermal Shutdown Section</b>						
Thermal shutdown Temperature				150		°C
<b>Over Current Protection Section</b>						
PMOS OCP Current	$I_{OCP}$			3		A

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Total Device Section</b>						
EN Input Current	$I_{EN}$	EN pin Open			20	$\mu A$
Upper Threshold Voltage (EN)	$V_{UPPER}$			1.12		V
Lower Threshold Voltage (EN)	$V_{LOW}$			0.87		V
Hysteresis	$V_{HYS}$		210	250		mV
Average Supply Current	$I_{AVE}$			4	6	mA
$V_{CC}$ Shutdown	$I_{SHUTDOWN}$			15		$\mu A$

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

## Detailed Description

### Voltage Reference

A built-in 2.5V reference regulator supplies FP7102 internal circuits. Also, this 2.5V reference voltage is divided down by an internal resistive divider to provide a 0.25V precision reference voltage to the error amplifier non-inverting terminal.

### Setting the LED Current

FP7102 is a constant current buck regulator. The LEDs are connected between  $V_{OUT}$  and FB pin as shown in the **Typical Application Circuit** section. The FB pin is 0.25V in regulation. Therefore, the LEDs current  $I_F$  is set by  $V_{FB}$  and the resistor  $R_2$  connected between FB and ground by the following equation:

$$I_F = \frac{V_{FB}}{R_2}$$

$I_F$  should not exceed the 2A current capability of FP7102 and therefore  $R_2$  minimum value must be approximately  $0.13\Omega$ .

### Output Voltage

The output voltage is primarily determined by the number of LEDs(n) connected between  $V_{OUT}$  and FB pin. Therefore,  $V_{OUT}$  can be written as:

$$V_{OUT} = ((n \times V_F) + V_{FB})$$

Where  $V_F$  is the forward voltage of one LED at the set LED current level (see LED manufacturer datasheet for forward characteristics curve)

### Oscillator

The fixed PWM frequency is generated by an internal oscillator. Its typical values are 320KHz.

### Thermal Protection


The thermal protection is triggered when junction temperature is higher than  $150^\circ\text{C}$  that may occur by an abnormal heavy current loading. When this happens, the FP7102 turns output off. Once the junction temperature is cooled down to lower than  $130^\circ\text{C}$ , FP7102 starts again and turns the power switch on.



**Over Current Protection**

The FP7102 uses cycle-by-cycle current limit to protect the internal power switch. During each switching cycle, a current limit comparator detects if the power switch current exceeds the internal setting current. If it does, over current protection function decrease the oscillator frequency to prevent thermal issue.


## Typical Application

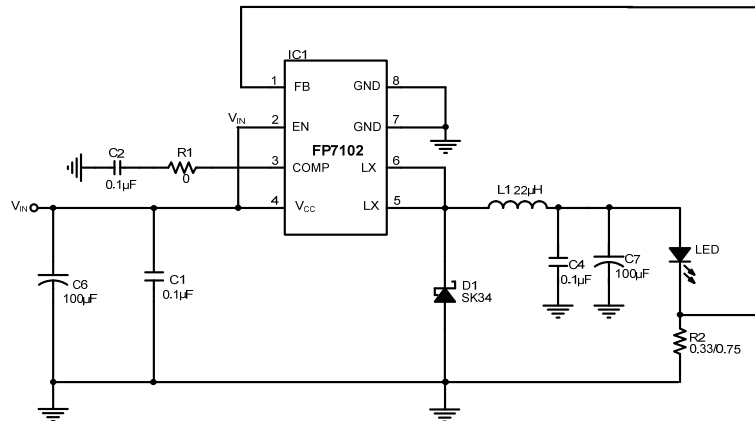

FP7102 1W / 3W LED for DC Input Circuit

## Dimming Control Circuit

Changing the duty cycle of PWM signal can get different LED current. The PWM signal is recommended above 10kHz. The application circuit is shown in the following.

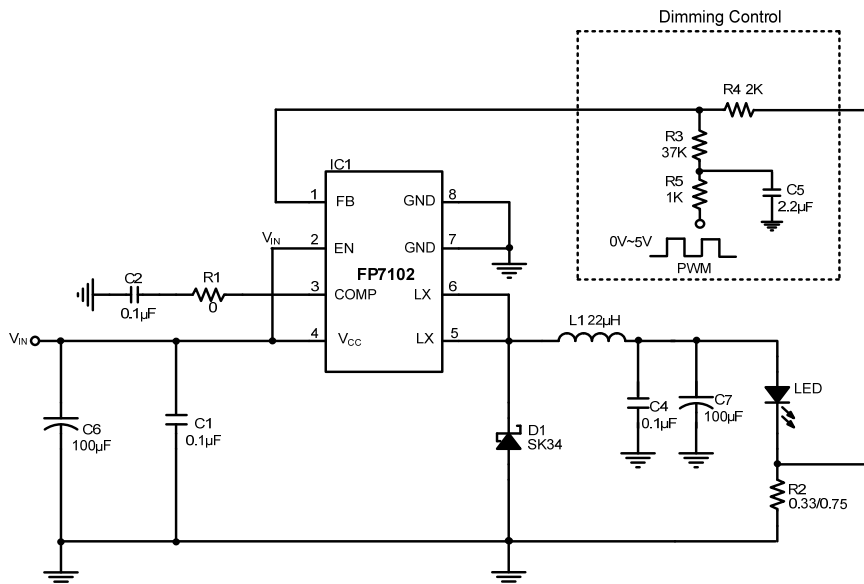


The LED current can be calculated by the following equation:

$$I_{LED} = \frac{V_{FB} - \frac{R4 \times (V_{PWM} \times Duty - V_{FB})}{R3 + R5}}{R2}$$

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

## Package Outline

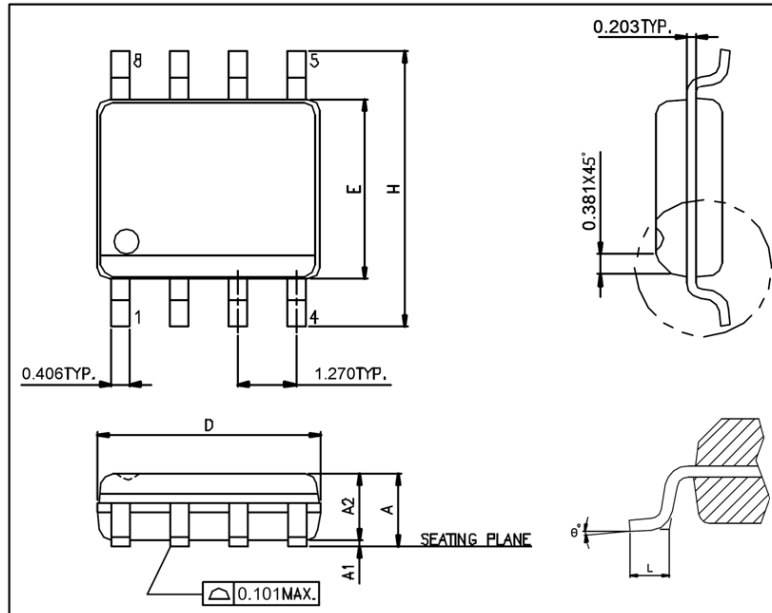
**SOP-8L**

**UNIT: mm**

Symbols	Min. (mm)	Max. (mm)
A	1.346	1.752
A1	0.101	0.254
A2		1.498
D	4.800	4.978
E	3.810	3.987
H	5.791	6.197
L	0.406	1.270
$\theta^\circ$	$0^\circ$	$8^\circ$

**Note:**

1. Package dimensions are in compliance with JEDEC outline: MS-012 AC.
2. Dimension "D" does not include molding flash, protrusions or gate burrs.
3. Dimension "E" does not include inter-lead flash or protrusions.

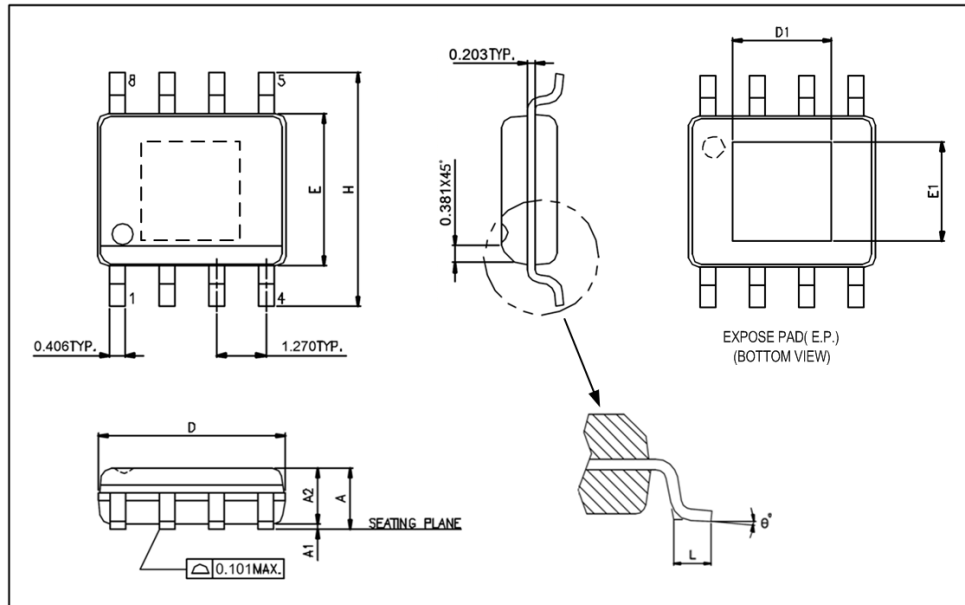This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

**SOP-8L (EP)**

**UNIT: mm**

Symbols	Min. (mm)	Max. (mm)
A	1.346	1.752
A1	0.050	0.152
A2		1.498
D	4.800	4.978
E	3.810	3.987
H	5.791	6.197
L	0.406	1.270
$\theta^\circ$	0°	8°

**Exposed PAD Dimensions:**

Symbols	Min. (mm)	Max. (mm)
E1		2.184 REF
D1		2.971 REF

**Note:**

1. Package dimensions are in compliance with JEDEC outline: MO-178 AA.
2. Dimension "D" does not include molding flash, protrusions or gate burrs.
3. Dimension "E" does not include inter-lead flash or protrusions

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Display Drivers](#) category:*

*Click to view products by [Feeling](#) manufacturer:*

Other Similar products are found below :

[STP16CPP05XTTR](#) [SCT2027CSSG](#) [KP22306WGA](#) [KP1199AWPA](#) [KP1199BWPA](#) [WS9088AS7P](#) [GN1628T](#) [BCT3236EGH-TR](#)  
[HT1628BRWZ](#) [KP1192SPA](#) [KP1182SPA](#) [KP1262FSPA](#) [KP1072LSPA](#) [KP1191SPA](#) [KP18001WPA](#) [KP1070LSPA](#) [KP1221SPA](#)  
[KP107ALSPA](#) [GN1640T](#) [MBI5253GP-A](#) [MBI5124GM-B](#) [WS90561T S7P](#) [WS9821B S7P](#) [WS9032GS7P](#) [LYT3315D](#) [M08888G-11](#)  
[M08890G-13](#) [BCR420U](#) [SCT2001ASIG](#) [SCT2024CSOG](#) [SCT2024CSSG](#) [SCT2024CSTG](#) [SCT2167CSSG](#) [AL8400QSE-7](#) [PR4401](#) [PR4403](#)  
[PCA9685PW](#) [STP16CPC05XTTR](#) [WS2821B](#) [PR4402](#) [M08898G-13](#) [RT8471GJ5](#) [RT9284A-20GJ6E](#) [TLC59482DBQR](#) [ISL97634IRT14Z-](#)  
[TK](#) [AW36413CSR](#) [LP5562TMX](#) [DLD101Q-7](#) [WS2818B](#) [BCR401U](#)