



AEL-5000 Series

AC & DC Electronic Load

FEATURES

- CC, Linear CC, CR, CV, CP and AC Rectifier Load Mode
- Frequency Range : DC, 40~440Hz
- Turbo Mode for 2 Times the Current and Power of Electronic Load within 1 Second
- Eight Units Connected in Parallel up to 180kW for Single-phase and 540kW for Three-phase. Three-phase Delta or Wye Load Connection Can be Synchronized Control by One Master Unit
- Loading and Unloading Angle Control; 0~359 Degree is Settable
- Positive Half-cycle or Negative Half-cycle Loading
- Supports SCR/TRIAC Current Phase Modulation Waveforms, 90 Degree Trailing Edge and Leading Edge
- Optional Interface : GPIB 、 RS232 、 USB 、 LAN

GW INSTEK
Simply Reliable

AC & DC Electronic Load

AEL-5000 Series



AEL-5002-350-18.75 **AEL-5006-350-56** **AEL-5012-350-112.5** **AEL-5015-350-112.5** **AEL-5019-350-112.5** **AEL-5023-350-112.5**
AEL-5003-350-28 **AEL-5008-350-75** **AEL-5012-425-112.5** **AEL-5015-425-112.5** **AEL-5019-425-112.5** **AEL-5023-425-112.5**
AEL-5004-350-37.5 **AEL-5006-425-56**
AEL-5002-425-18.75 **AEL-5008-425-75**
AEL-5003-425-28
AEL-5004-425-37.5
AEL-5003-480-18.75
AEL-5004-480-28



| MODEL | Power (W) | | Current(Ampere) | | Voltage(Volt) |
|--------------------|-----------|--------------|-------------------------|---------------------------|---------------------|
| | Turbo OFF | Turbo ON | Turbo OFF | Turbo ON | |
| AEL-5002-350-18.75 | 1875 W | 3750W (x2)* | 18.75 Arms / 56.25Apeak | 37.5Arms/56.25Apeak (x2)* | 50~350Vrms / 500Vdc |
| AEL-5003-350-28 | 2800W | 5600W (x2)* | 28 Arms / 84Apeak | 56Arms/84Apeak (x2)* | |
| AEL-5004-350-37.5 | 3750 W | 7500W (x2)* | 37.5 Arms / 112.5Apeak | 75.0Arms/112.5Apeak (x2)* | |
| AEL-5002-425-18.75 | 1875 W | 3750W (x2)* | 18.75 Arms / 56.25Apeak | 37.5Arms/56.25Apeak (x2)* | 50~425Vrms / 600Vdc |
| AEL-5003-425-28 | 2800W | 5600W (x2)* | 28 Arms / 84Apeak | 56Arms/84Apeak (x2)* | |
| AEL-5004-425-37.5 | 3750 W | 7500W (x2)* | 37.5 Arms / 112.5Apeak | 75.0Arms/112.5Apeak (x2)* | |
| AEL-5006-350-56 | 5600 W | 11200W (x2)* | 56.0 Arms / 168Apeak | 112.0Arms/ 168Apeak (x2)* | 50~350Vrms / 500Vdc |
| AEL-5008-350-75 | 7500 W | 15000W (x2)* | 75.0 Arms / 225Apeak | 150.0Arms/225Apeak (x2)* | |
| AEL-5012-350-112.5 | 11250W | 22500W (x2)* | 112.5 Arms / 337.5Apeak | 225Arms/337.5Apeak (x2)* | |
| AEL-5015-350-112.5 | 15000W | 30000W (x2)* | 112.5 Arms / 337.5Apeak | 225Arms/337.5Apeak (x2)* | 50~350Vrms / 500Vdc |
| AEL-5019-350-112.5 | 18750W | 37500W (x2)* | 112.5 Arms / 337.5Apeak | 225Arms/337.5Apeak (x2)* | |
| AEL-5023-350-112.5 | 22500W | 45000W (x2)* | 112.5 Arms / 337.5Apeak | 225Arms/337.5Apeak (x2)* | |
| AEL-5006-425-56 | 5600 W | 11200W (x2)* | 56.0 Arms / 168Apeak | 112.0Arms/ 168Apeak (x2)* | 50~425Vrms / 600Vdc |
| AEL-5008-425-75 | 7500 W | 15000W (x2)* | 75.0 Arms / 225Apeak | 150.0Arms/225Apeak (x2)* | |
| AEL-5012-425-112.5 | 11250W | 22500W (x2)* | 112.5 Arms / 337.5Apeak | 225Arms/337.5Apeak (x2)* | |
| AEL-5015-425-112.5 | 15000W | 30000W (x2)* | 112.5 Arms / 337.5Apeak | 225Arms/337.5Apeak (x2)* | 50~425Vrms / 600Vdc |
| AEL-5019-425-112.5 | 18750W | 37500W (x2)* | 112.5 Arms / 337.5Apeak | 225Arms/337.5Apeak (x2)* | |
| AEL-5023-425-112.5 | 22500W | 45000W (x2)* | 112.5 Arms / 337.5Apeak | 225Arms/337.5Apeak (x2)* | |
| AEL-5003-480-18.75 | 2800W | 5600W (x2)* | 18.75 Arms / 56.25Apeak | 37.5Arms/56.25Apeak (x2)* | 50~480Vrms / 700Vdc |
| AEL-5004-480-28 | 3750 W | 7500W (x2)* | 28 Arms / 84Apeak | 56Arms/84Apeak (x2)* | |

* Power and current boost rate of Turbo ON

AC & DC Electronic Load


FEATURES

- 4 digit V / A/W Meter · display the Voltage (V_{rms} , V_{peak} , $V_{max.}$, V_{min}) · Current (I_{rms} , I_{peak} , $I_{max.}$, $I_{min.}$) · Watt, Voltampere (VA) · Frequency · Crest Factor · Power Factor · Total Harmonic Distortion of Voltage (VTHD), Voltage Harmonic (VH) · Total Harmonic Distortion of Current (ITHD), Current Harmonic (IH)
- CC, Linear CC, CR, CV, CP and AC Rectifier Load mode
- Crest factor range : 1.414~5.0
- Power factor (PF) range : 0~1 lead or (-1~0) lag
- Built-in function test modes include UPS Efficiency, PV Inverter Efficiency, UPS Back-up time, Battery Discharge time, UPS transfer time, Fuse/Breaker Trip/Non-Trip, Short circuit , OCP, OPP test modes
- Turbo mode is able to increase to 2 times the current and power of electronic load in a short period which is the most suitable for Fuse / Breaker test and short circuit, OCP, OPP test of AC power supply
- Time measurement can be applied to batteries, UPS, fuses and circuit breakers and other tests
- Support on-load boot; at first set Load ON to support on-load boot, inverter or uninterruptible power supply is turned on directly with the set load current, used to verify whether the starter is stable when the Inverter is connected.
- Supports the loading and unloading angle control; the loading and unloading angle control, the full range of 0-359 degrees can be set to verify whether the Inverter output voltage transient response is stable when the actual electrical plugging and unplugging, and whether Overshoot/Undershoot is within the allowable range.
- Support positive half-cycle or negative half-cycle loading; used to verify whether the Inverter output voltage remains stable when the actual appliance has only positive half-cycle or negative half-cycle load current.
- Supports SCR/TRIAC current phase modulation waveforms, 90 degree Trailing edge and Leading Edge.
- Supports the Inrush Current of the inverter at startup and the Surge Current test when the load is suddenly plugged in (Hot Plug-in) during testing.
- Frequency Range : DC, 40~440Hz
- Voltage and current monitoring
- Can be controlled by external voltage for CC, Linear CC, CR, CV, CP operating modes
- Protection against V, I, W, and °C
- Optional interface : GPIB · RS232 · USB · LAN
- The most complete measurement capabilities


AEL-5000 Series AC & DC electronic load built-in 16-bit A/D and DSP precision measurement circuit, provides accurate measurements, measurement items have V_{rms} , A_{rms} , Watt, VA, CF, PF, THD, VTHD, ITHD, I_{peak} , A_{max} , A_{min} , V_{max} , and V_{min} In addition to these measurement functions, it also provides time measurement · products such as UPS, fuses and circuit breakers etc. trip or blow time and transfer time for Off-line UPS

AC & DC Electronic Load


POWER CURVE

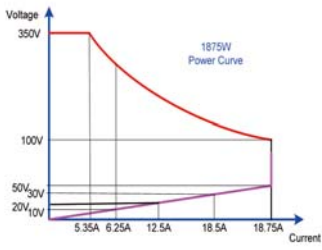


AEL-5002-350-18.75

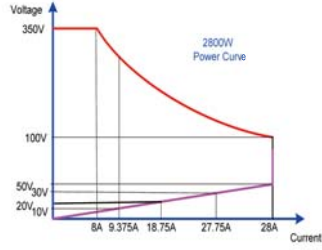


AEL-5003-350-28

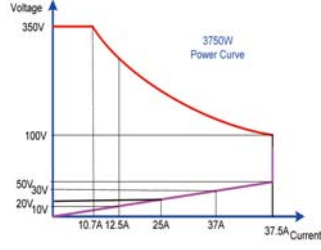


AEL-5004-350-37.5

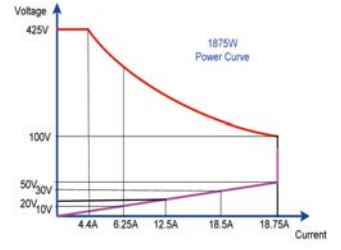


AEL-5002-425-18.75

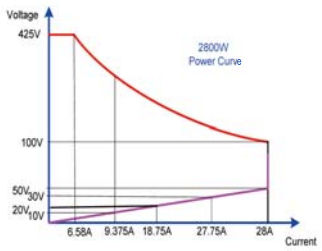


AEL-5003-425-28

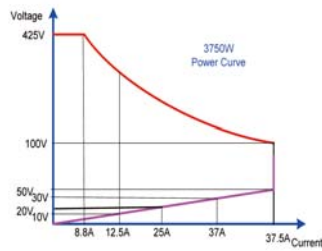


AEL-5004-425-37.5

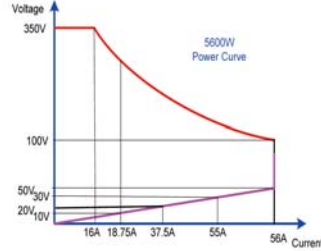


AEL-5006-350-56

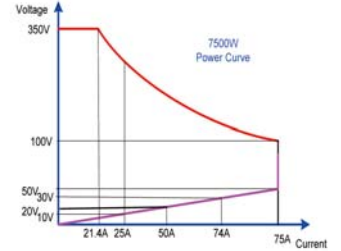


AEL-5008-350-75

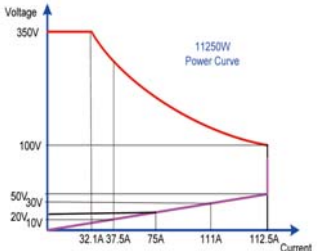


AEL-5012-350-112.5

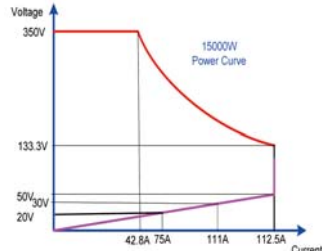


AEL-5015-350-112.5

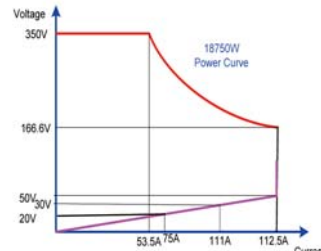


AEL-5019-350-112.5

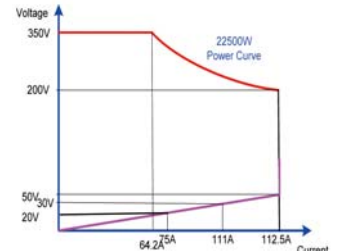


AEL-5023-350-112.5

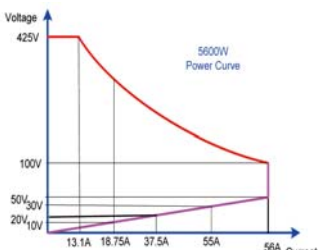


AEL-5006-425-56

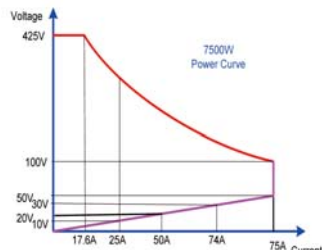


AEL-5008-425-75

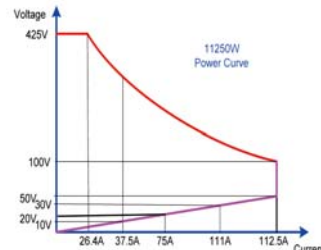


AEL-5012-425-112.5

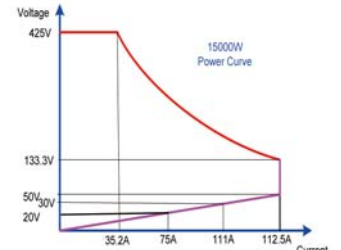


AEL-5015-425-112.5

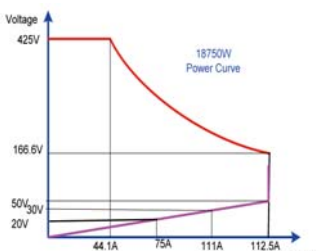


AEL-5019-425-112.5

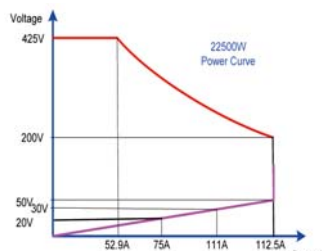

AEL-5023-425-112.5

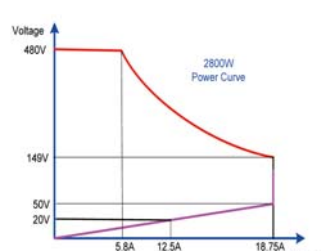


AEL-5003-480-18.75

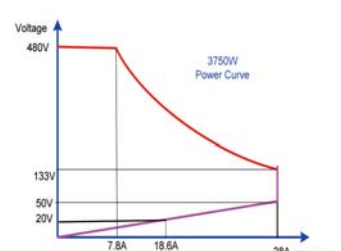


AEL-5004-480-28

AC & DC Electronic Load

COMPLETE AC AND DC LOAD MODES

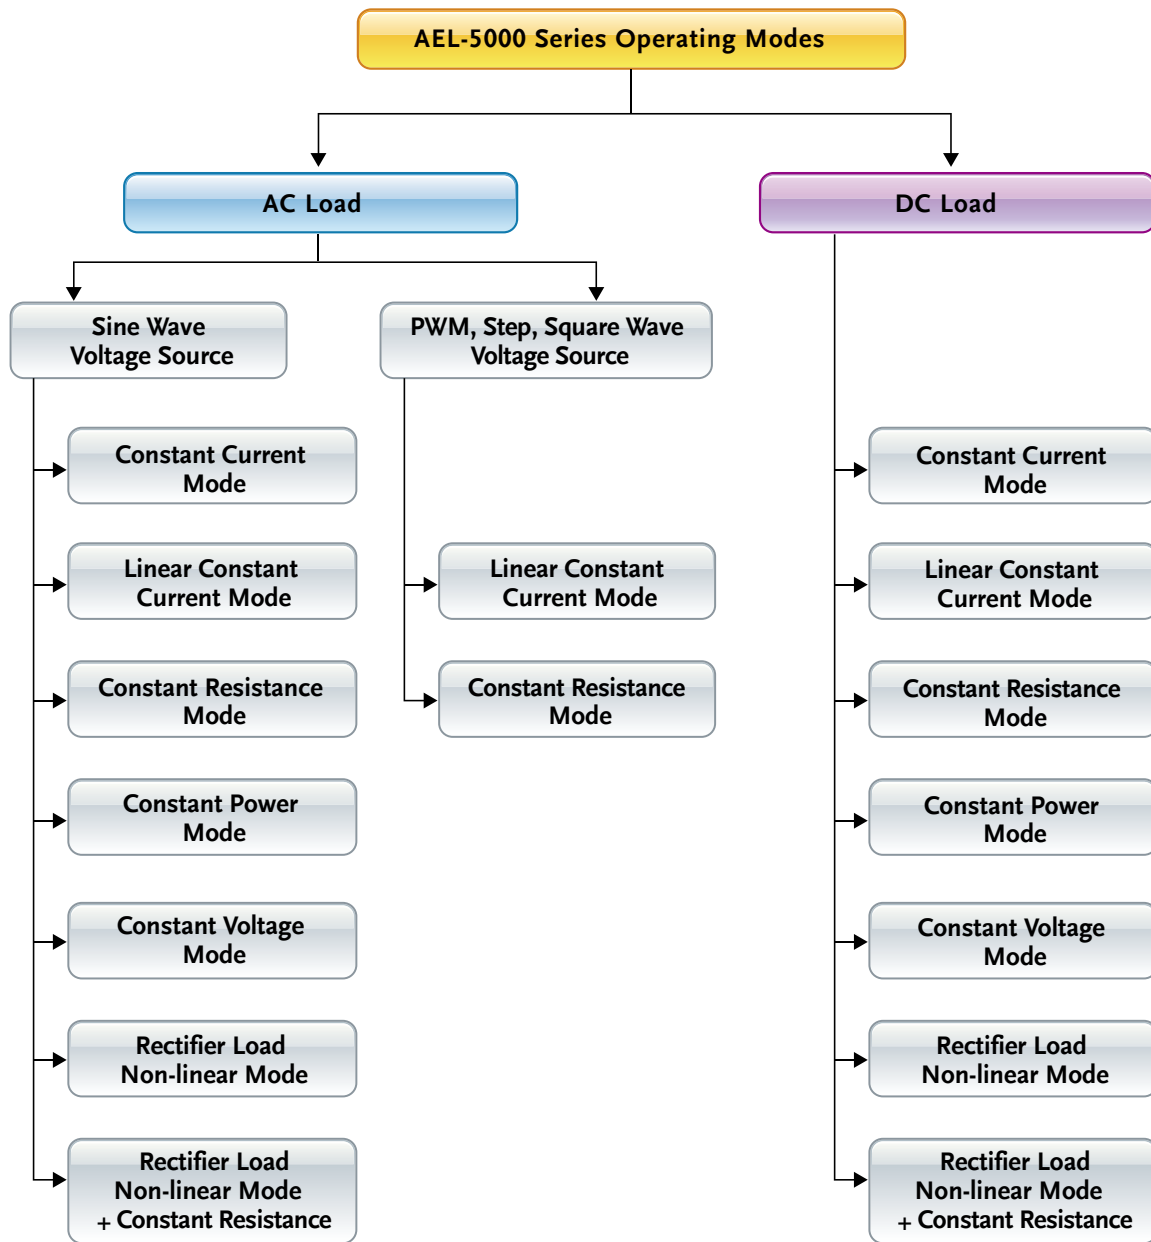


AC LOAD MODE

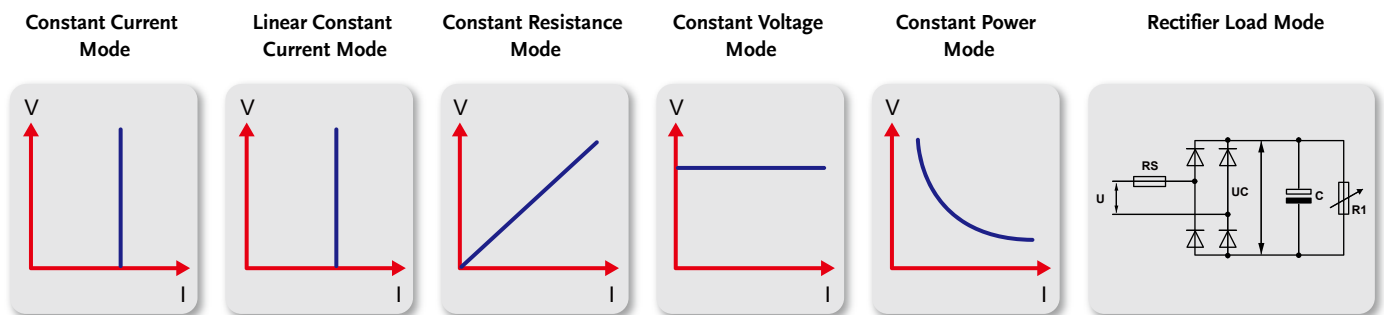


AC & DC Electronic Load

AC LOAD MODE


CC Mode : In the constant current mode of AC Load, can be applied to sine wave voltage source, providing CF, PF test of linear load.




CC mode

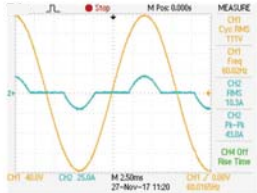


CC mode, CF = 2

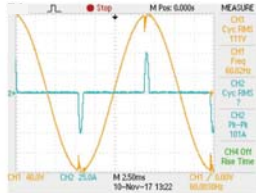

CC mode, CF = 5

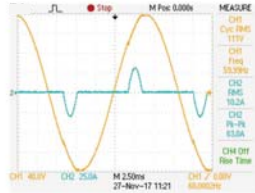


CC mode, CF = +0.5

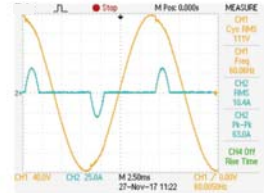


CC mode, CF = -0.5

Linear Constant Current Mode : Can be applied to sine wave and non-sine wave voltage source, as shown in the PWM inverter driver, step voltage source, and off-line UPS sine wave switch to square wave, square wave switch to sine wave.




Linear CC mode

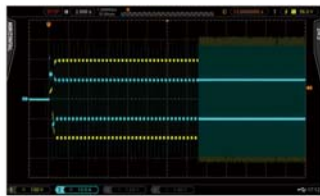


Linear CC mode, PWM 10A 2.5Hz to 250Hz




Linear CC mode, PWM 10A 2.5Hz

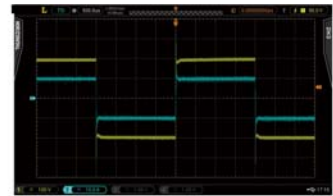


Linear CC mode, PWM 10A 250Hz

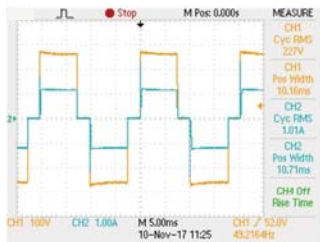

Linear CC mode, Step 10A

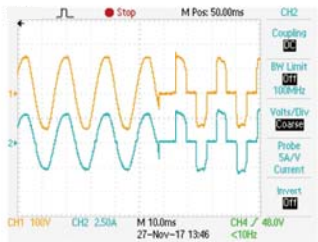


Linear CC mode, UPS Sine to Square Waveform

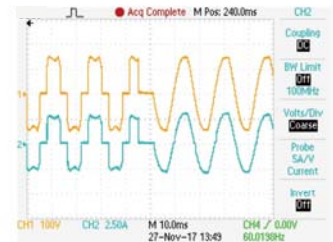


Linear CC mode, UPS Sine to Square Waveform


Supported on-load start-up : at first set Load ON to support on-load start-up, inverter or uninterruptible power supply is start-up directly with the set load current, used to verify whether the Inverter is stable when the load is connected during start-up.

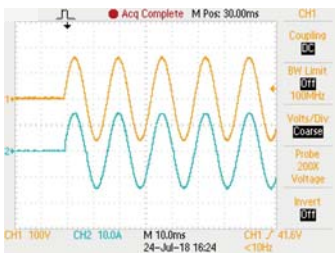

CC 10 A on-load boot

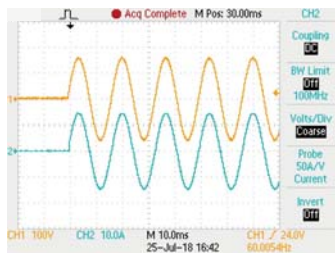


CR 10 A on-load boot

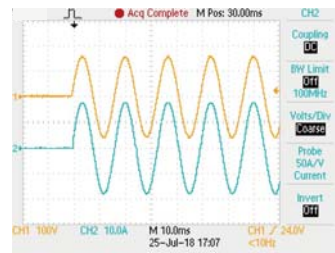

CV 10 A on-load boot

AC & DC Electronic Load

Supports the loading and unloading current angle control ; the loading and unloading current angle range of 0-359 degrees can be programmed to verify whether the Inverter output voltage transient response is stable during the actual electrical appliance is connected or turn ON / OFF randomly it can be used to verify the Overshoot / Undershoot response is within the desire range.

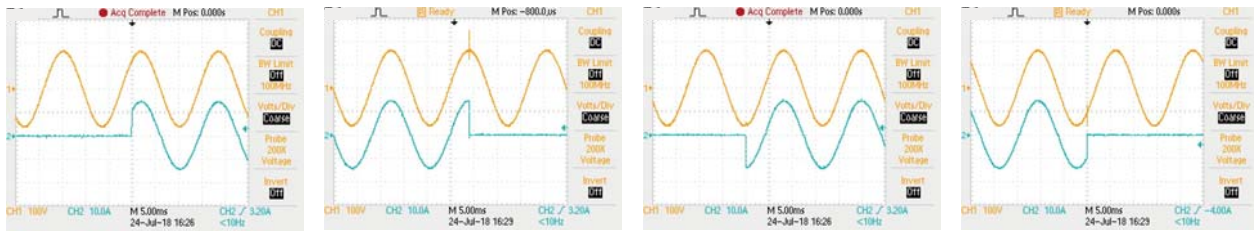


45 degrees loading

90 degrees unloading

270 degrees loading

315 degrees unloading

Support positive half-cycle or negative half-cycle loading ; it can be used to verify whether the Inverter output voltage remains stable when the actual appliance has only positive half-cycle or negative half-cycle load current.

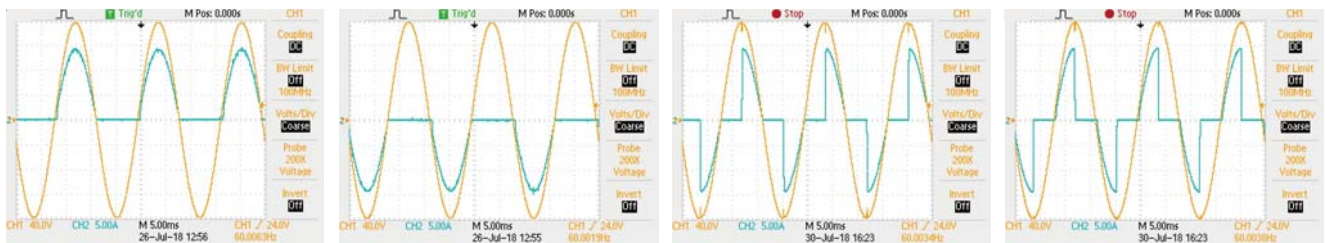


positive half-cycle

negative half-cycle

90 degrees TRIAC/SCR current waveforms Leading edge



90 degrees current waveforms Leading edge

Support the Inrush Current of the inverter at startup and Power Plug-in test when the power supply is turned on to verify the Inrush Current and the sudden connection of the appliance when the power is turned on(Surge Current), to verify if whether the Inverter output voltage transient response is stable, as shown in the figure below.

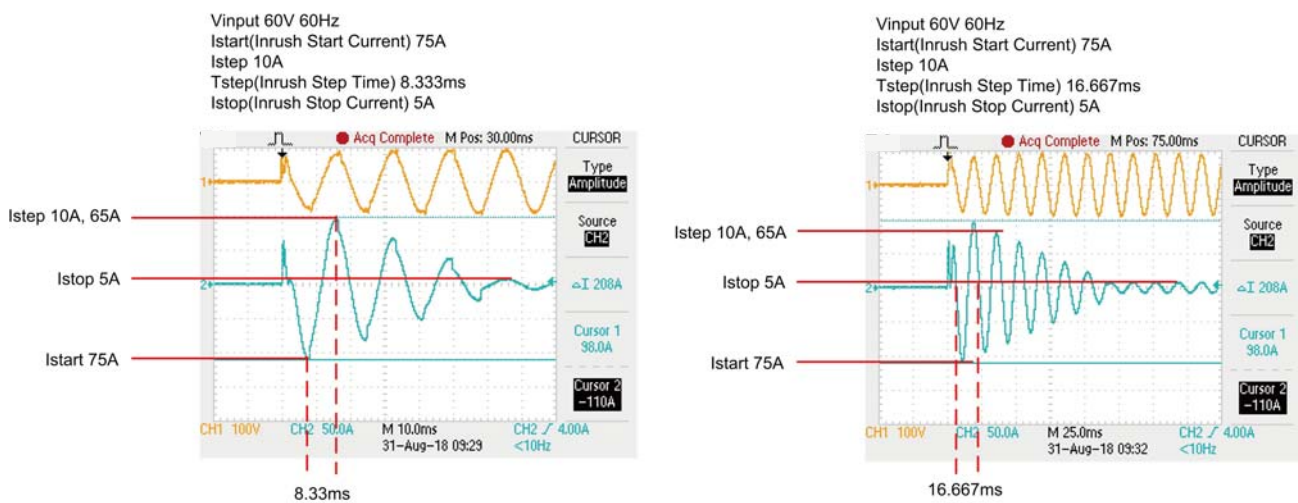

Inrush current test at boot




AC & DC Electronic Load

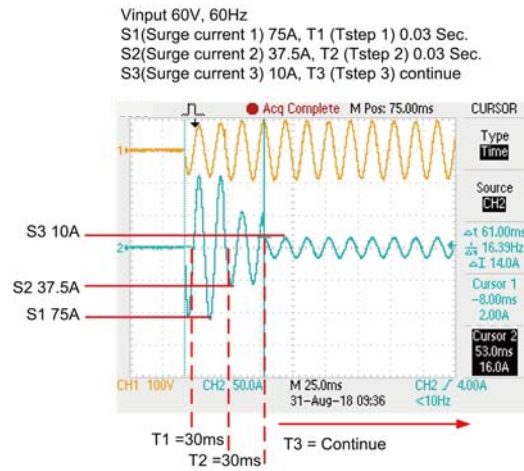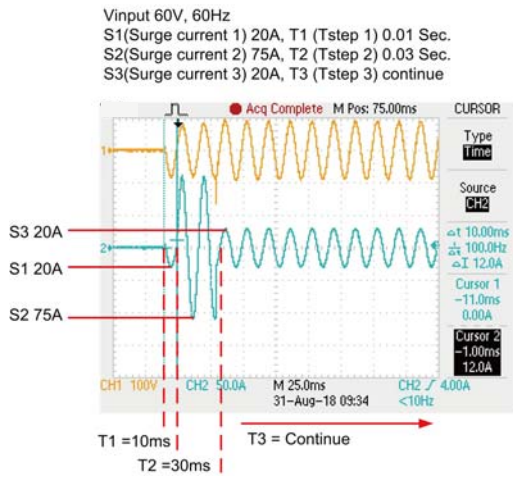


Inrush Current test at boot

AC RECTIFIED LOAD SIMULATION MEET THE IEC62040-3 AND IEC61683 TEST SPECIFICATIONS



AEL-5000 Series AC & DC electronic load AC rectified load mode is fully compliance with the IEC test specification requirements for the UPS, IEC 62040-3 UPS Efficiency Measurement Non-Linear and IEC 61683 Resistive Plus Non-Linear, respectively, AEL-5000 Series AC rectifier load mode uses CC + CR load mode and maintain current THD at 80%, to simulate the actual PV Inverter connected to the electronic device.

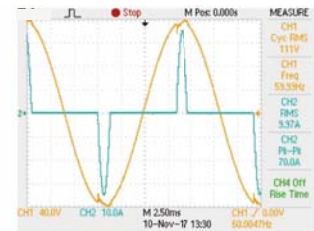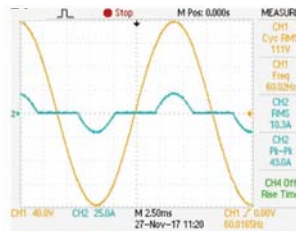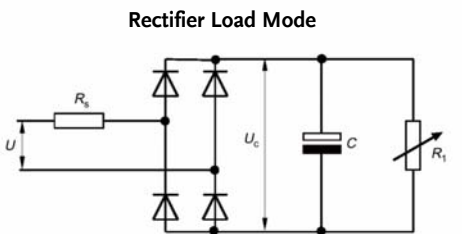

Non-Linear CC mode for UPS test

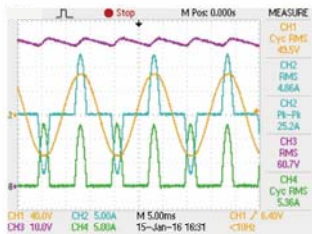

The actual V / A waveform

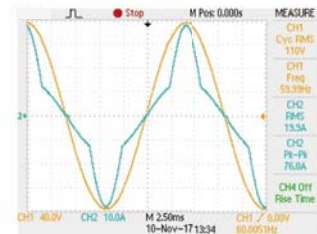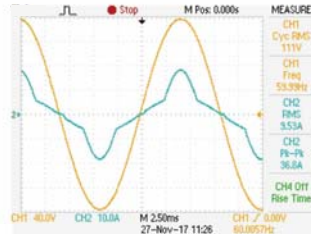


110V, 5A + 22ohm Test Waveform 110V, 10A + 11ohm Test Waveform
 PV Inverter test Non-Linear CC + Resistive mode (CC+CR)

AC & DC Electronic Load

AEL-5000 LOAD VARIOUS TEST MODES

The AEL-5000 Series AC & DC electronic load features built-in test modes for a variety of products. Including AC Load of UPS, Inverter, Fuse/Breaker, AC Power Source and DC Load of Battery, Fuse/Breaker, DC Power Source etc..as shown below.

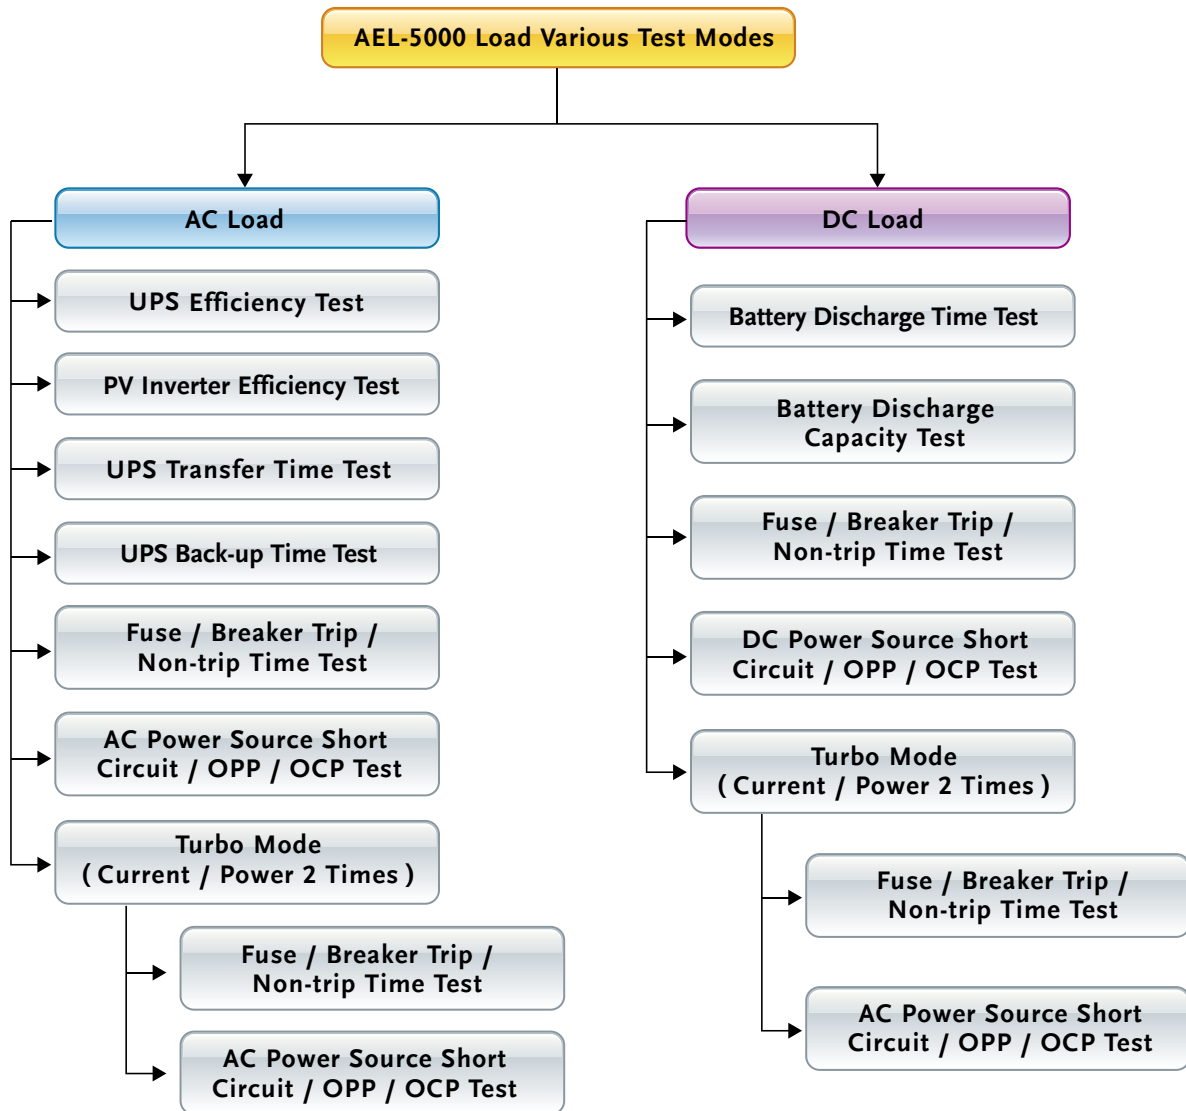

AC & DC Electronic Load

CURRENT PROTECTION COMPONENT TEST


Current protection component includes Fuse, Circuit breakers and a new PTC Resettable fuse etc., its function is when the circuit current exceeds the design of the rated value, that is, if the load exceeds the design of the current capacity, the circuit will be disconnected, in order to avoid overheating, even fire. Fuse is a one-time use of the protection components, Breaker and PTC can be reused.

The current protection components of the protection current value and the protection reaction time has usually a product of the relationship that is, the greater the current through the current protection component, the shorter the reaction time to protect the circuit. This is similar to energy protection components.


Due to this feature, the AEL-5000 Series AC & DC electronic load, in particular for the verification of current protection components, has developed a Fuse Test function to test and verify such protection element with an electronic load of rated current and power. When Turbo mode is set to ON, the test current can be up to double the maximum current within 1 second of test period. Take AEL-5004-350-37.5 as an example, the maximum test current can be doubled to 75A. That is, when the Turbo mode of the AEL-5000 Series is ON, the test current value can reach to 2 units AEL-5000 Series (normal mode) within 1



Turbo OFF, Short 100ms 37.5A
Test result screen

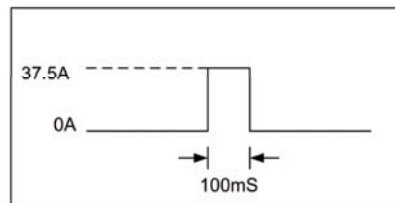


Turbo OFF, Short 100ms 37.5A Setting

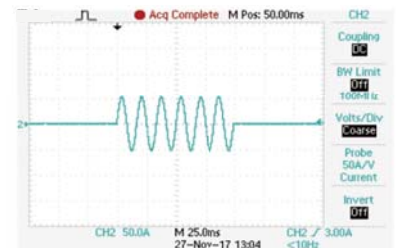


Turbo OFF, Short 100ms 37.5A
The actual test waveform



Turbo ON, Short 100ms 75.0A
Test result screen

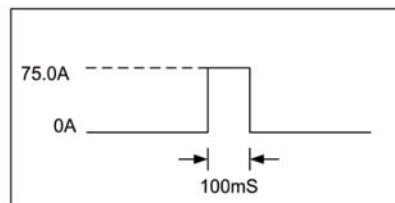

Turbo ON, Short 100ms 75.0A Setting

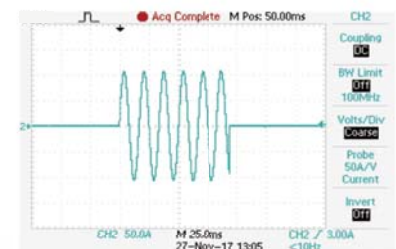


Turbo ON, Short 100ms 75.0A
The actual test waveform


AC & DC Electronic Load



Turbo OFF, OCP Istep 3.75 A Istop 37.5A
Test result screen

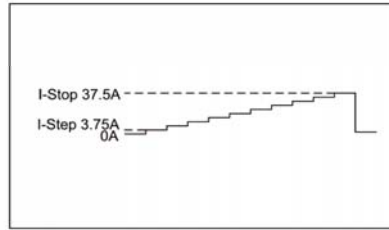


Turbo OFF, OCP Istep 3.75 A Istop 37.5A
Setting

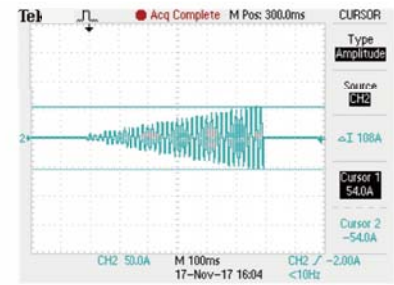


Turbo OFF, OCP Istep 3.75 A Istop 37.5A
The actual test waveform



Turbo ON, OCP Istep 7.5 A Istop 75A
Test result screen

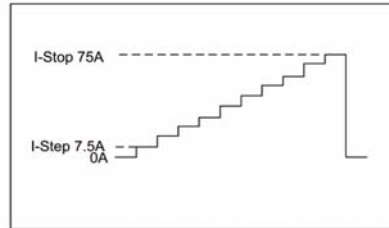

Turbo ON, OCP Istep 7.5 A Istop 75.0A
Setting

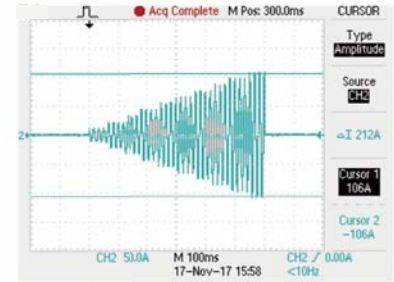

Turbo ON, OCP Istep 7.5 A Istop 75.0A
The actual test waveform

Basically, Fuse test has Trip (Blown) and Non-Trip (no Blown) 2 types.

Fuse Test setting parameters include test current (Istart), test time (Time), test REPEAT Time etc..


In the Trip fuse test, it is used to test when there is too large abnormal current the Fuse or Bleaker must be able to provide the protection of the circuit break, that means current protection components need the fuse action, therefore the test current needs to be larger than the fuse current rating.

When the AEL-5000 Series AC & DC electronic load detects a voltage lower than 1.0V, the LCD displays the number of Repeat Cycle and Current Protection Fusing Time XXXX.X sec.


In the Non-Trip (no Blown) test, the current protection component is required to achieve non-blow action, so the test current needs to be lower than the fuse current rating that is used to verify the fuse must not blow during normal current range. When the AEL-5000 Series AC & DC electronic load is not blown after the test time (Pulse Time) and the repeated Repeat number, the LCD displays the information of the Repeat number.



Turbo : OFF, Fuse mode
Test result screen

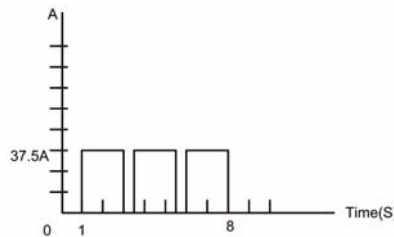


Setting : Turbo : OFF, Fuse ON
CC pulse 37.5A, 2s, Test 3 cycles

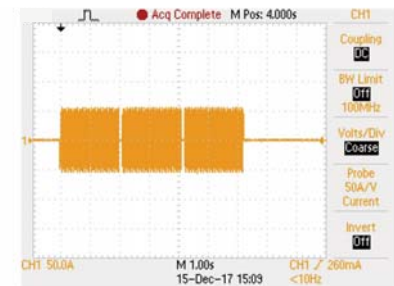


Turbo : OFF, Fuse ON, CC pulse 37.5A, 2s,
Test 3 cycles the actual test waveform



Turbo ON, Fuse mode
Test result screen

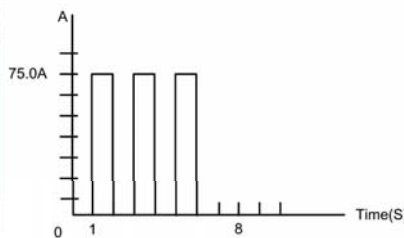

Setting : Turbo : ON, Fuse ON
CC pulse 75.0A, 1s, Test 3 cycles

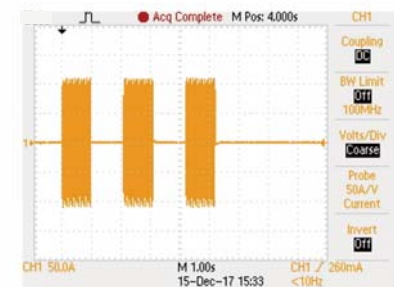


Turbo : ON, Fuse ON, CC pulse 75A, 1s,
Test 3 cycles the actual test waveform

AC & DC Electronic Load


BATTERY TEST FUNCTION

AEL-5000 Series AC & DC electronic load has built-in new TYPE1 ~ TYPE3 battery discharge test, you can select the desired battery test mode, the test results can be directly displayed on the LCD display for battery AH capacity, the voltage value after discharge and the cumulative discharge time.

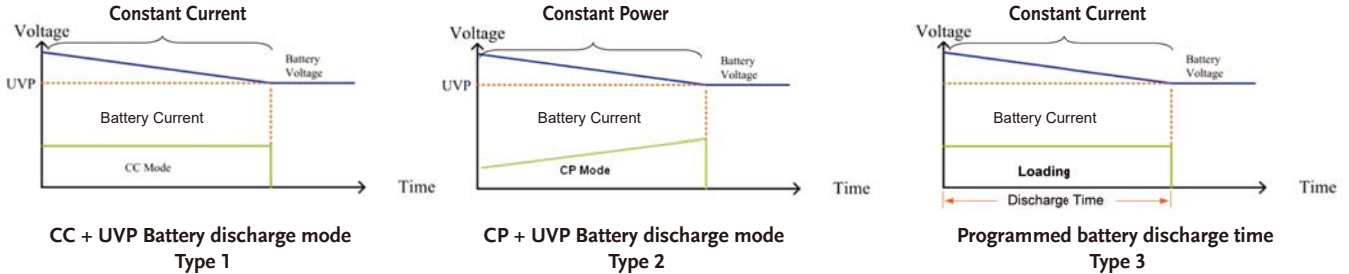


PARALLEL AND THREE-PHASE CONTROL

The AEL-5000 Series AC & DC load provides multiple units in parallel, three-phase applications that allows users to test applications with greater power or three-phase AC power, this is more flexibility to use the AEL-5000 Series AC & DC Electronic Load for control. In parallel / three-phase operation, the user operates the unit as the operation of a single machine, as long as the Master can be operated, Slave1 and Slave2 will automatically sink the load and measurement. Parallel and three-phase connection as shown below.

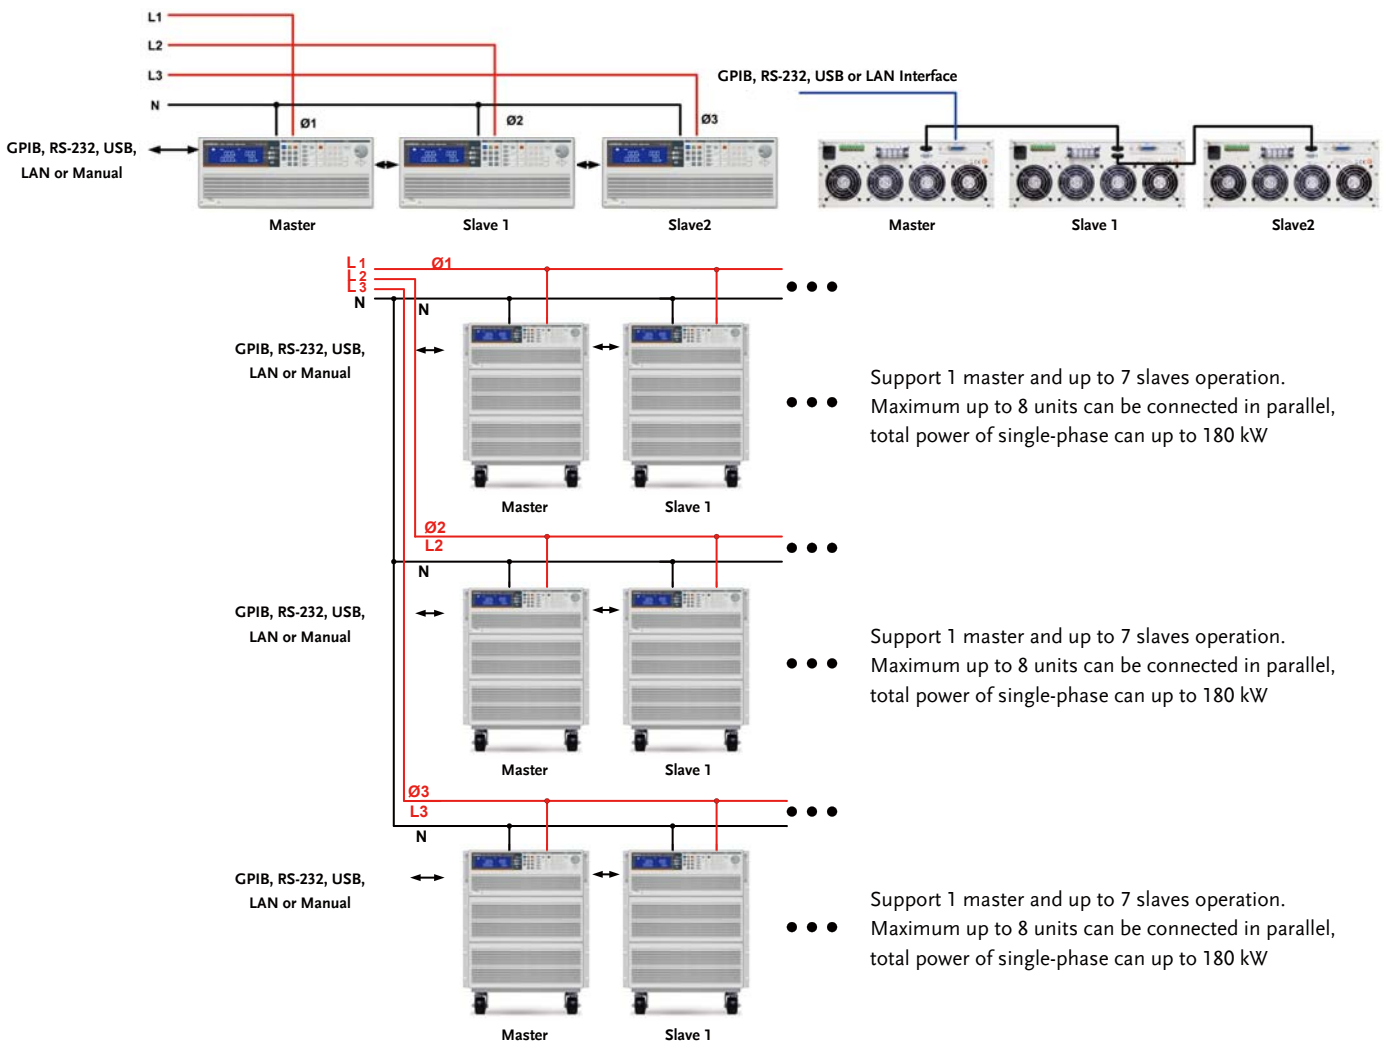


Maximum power of single-phase can up to 180kW, 3-phase total power up to 540kW 3-phase Δ or Y Connection

AC & DC Electronic Load

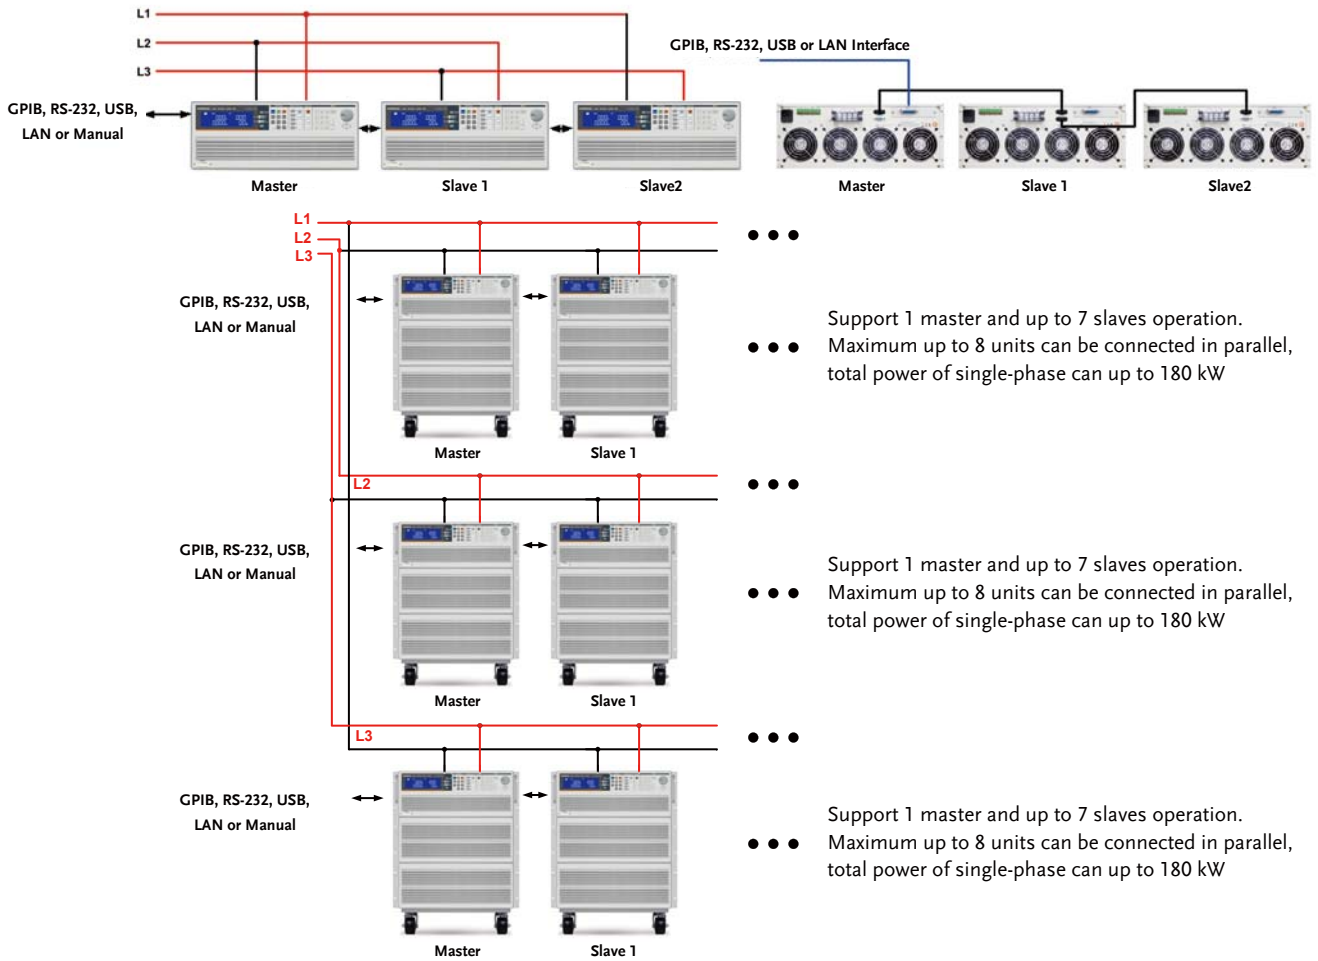

Maximum power of single-phase can up to 180kW, 3-phase total power up to 540kW 3-phase Δ or Y Connection parallel connection

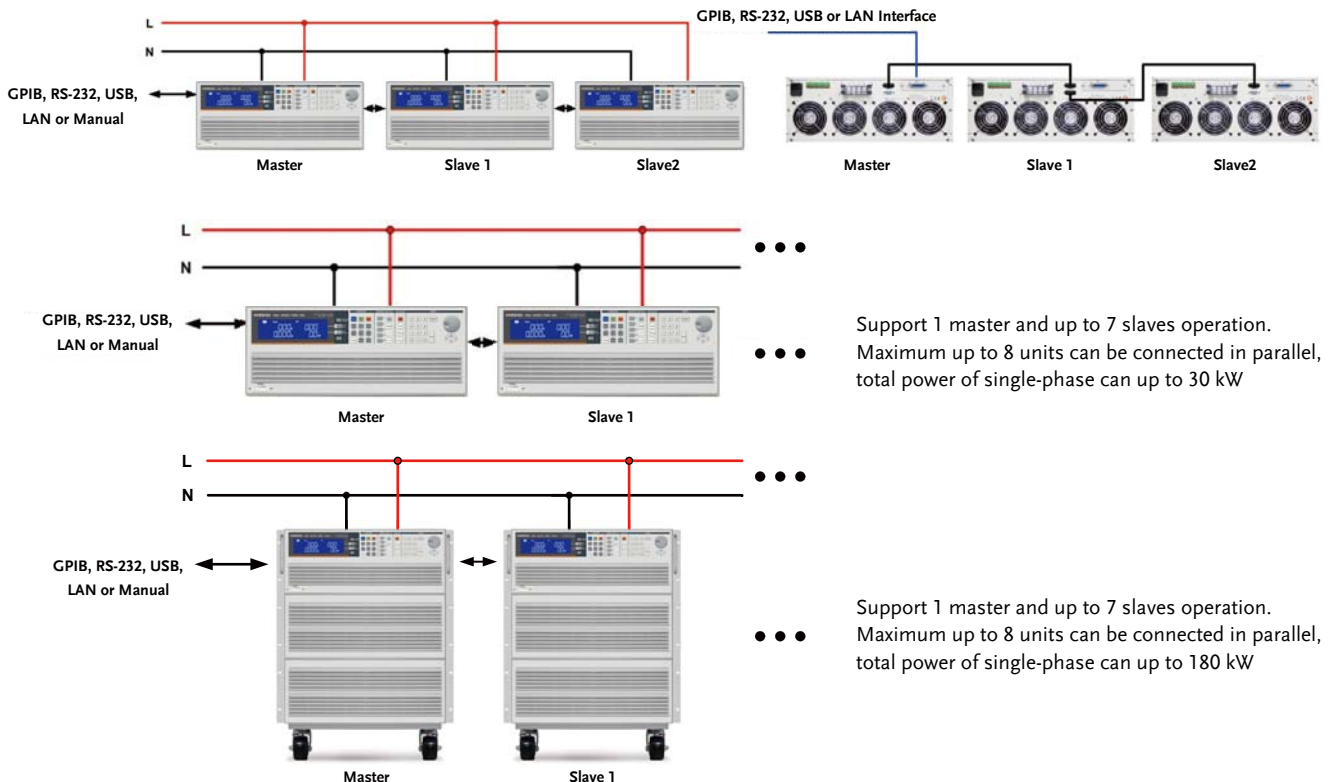


Parallel connection

AC & DC Electronic Load

PANEL INSTRUCTIONS



| | | | |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | LCD Multi-function display Four meters can display the voltage value at the same time the Voltage(Vrms, Vpeak, Vmax., Vmin) \ Current (Irms, Ipeak, Imax., Imin.) \ Watt, Voltampere(VA) \ Frequency \ Crest Factor \ Power Factor \ Total Harmonic Distortion of Voltg(VTHD) \ Voltage Harmonic(VH) \ Total Harmonic Distortion of Current(ITHD) \ Current Harmonic(IH) | 3 | Operate function keys Mode \ Preset ON / OFF \ Load ON / OFF \ Sense ON / OFF \ Level A / B \ Config \ Limit \ Recall \ Store \ SEQ \ Local \ System operate function keys |
| | | 4 | Waveform library keys Can be quickly set CF $\sqrt{2}$ / 2 / 2.5 / 3 / 3.5 , +/- PF0.6 / 0.7 / 0.8 / 0.9 / 1.0 , FREQ Auto / 50Hz/ 60Hz / 400Hz ° |
| | | 5 | Test function keys Can select Short / OPP / OCP / Non-L / NL-CR / Fuse / Batt (Battery Discharge) / Trans (UPS transfer time) test functions. |
| 2 | Meter switch button V / A / W keys can set the display Rms / Peak / Max / Min, Meter key can select PF / CF / FREQ , switchable display WATT / VA / VAR keys , THD key choose to display THD | 6 | Numeric keypad |
| | | 7 | Knob setting |
| | | 8 | Switch |
| | | 9 | Cursor and button setting |

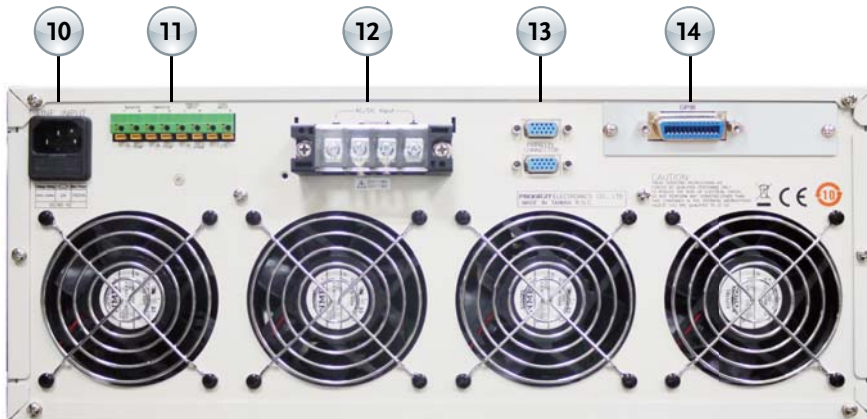

| | | | |
|----|-----------------------------------------------------------------------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10 | AC power input connector | 13 | Master-slave control connector Master : Connect the top or bottom to the next unit Slave : The top connects to the previous unit and the bottom connects to the next unit |
| 11 | Vmonitor \ Imonitor \ Analog input \ SYNC input Input terminal | | |
| 12 | Vload, Vsense Input terminal | 14 | Communication interface (GPIB \ RS-232 \ USB \ LAN) |

AC & DC Electronic Load

SPECIFICATIONS

| MODEL | AEL-5002-350-18.75 | AEL-5003-350-28 | AEL-5004-350-37.5 | AEL-5002-425-18.75 | AEL-5003-425-28 | AEL-5004-425-37.5 |
|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------|
| Power (W) | 1875 W | 2800W | 3750 W | 1875 W | 2800W | 3750 W |
| Current(Ampere) | 18.75 Arms / 56.25Apeak | 28 Arms / 84Apeak | 37.5 Arms / 112.5Apeak | 18.75 Arms / 56.25Apeak | 28 Arms / 84Apeak | 37.5 Arms / 112.5Apeak |
| Voltage(Volt) | 50-350Vrms / 500Vdc | | | 50-425Vrms / 600Vdc | | |
| FREQUENCY Range | DC,40-440Hz(CC,CP Mode), DC-440Hz(LIN,CR,CV Mode) | | | DC,40-440Hz(CC,CP Mode), DC-440Hz(LIN,CR,CV Mode) | | |
| PROTECTIONS | DC,40-440Hz(CC,CP Mode), DC-440Hz(LIN,CR,CV Mode) | | | DC,40-440Hz(CC,CP Mode), DC-440Hz(LIN,CR,CV Mode) | | |
| Over Power Protection | ≅ 1968.75Wrms or Programmable | ≅ 2940Wrms or Programmable | ≅ 3937.5Wrms or Programmable | ≅ 1968.75Wrms or Programmable | ≅ 2940Wrms or Programmable | ≅ 3937.5Wrms or Programmable |
| Over Current Protection | ≅ 19.687 Arms or Programmable | ≅ 28 Arms or Programmable | ≅ 39.375 Arms, or Programmable | ≅ 19.687 Arms or Programmable | ≅ 28 Arms or Programmable | ≅ 39.375 Arms, or Programmable |
| Over Voltage Protection | ≅ 367.5 Vrms / 525Vdc | | | ≅ 446.25 Vrms/630Vdc | | |
| Over Temp. Protection | Yes | | | Yes | | |
| OPERATION MODE | | | | | | |
| Constant Current Mode for Sine-Wave | | | | | | |
| Range | 0-18.75A | 0-28A | 0-37.5A | 0-18.75A | 0-28A | 0-37.5A |
| Resolution | 0.3125mA/16bits | 0.5mA/16bits | 0.625mA/16bits | 0.3125mA/16bits | 0.5mA/16bits | 0.625mA/16bits |
| Accuracy | ± (0.1% of setting + 0.2% of range) @ 50/60Hz | | | | | |
| Linear Constant Current Mode for Sine-Wave, Square Wave or Quasi-Square Wave, PWM Wave | | | | | | |
| Range | 0-18.75A | 0-28A | 0-37.5A | 0-18.75A | 0-28A | 0-37.5A |
| Resolution | 0.3125mA/16bits | 0.5mA/16bits | 0.625mA/16bits | 0.3125mA/16bits | 0.5mA/16bits | 0.625mA/16bits |
| Accuracy | ± (0.1% of setting + 0.2% of range) @ 50/60Hz | | | | | |
| Constant Resistance Mode | | | | | | |
| Range | 3.2 ohm - 64k ohm | 2.0 ohm - 40k ohm | 1.6 ohm - 32k ohm | 3.2 ohm - 64k ohm | 2.0 ohm - 40k ohm | 1.6 ohm - 32k ohm |
| Resolution ¹ | 0.0052083mS/16bits | 0.0083333mS/16bits | 0.010416mS/16bits | 0.0052083mS/16bits | 0.0083333mS/16bits | 0.010416mS/16bits |
| Accuracy | ±0.2% of (setting + range) @ 50/60Hz | | | | | |
| Constant Voltage Mode | | | | | | |
| Range | 50-350Vrms / 500Vdc | | | 50-425Vrms / 600Vdc | | |
| Resolution | 0.01V | | | 0.1V | | |
| Accuracy | ±(0.1% of setting + 0.1% of range) | | | ±(0.1% of setting + 0.1% of range) | | |
| Constant Power Mode | | | | | | |
| Range | 1875W | 2800W | 3750W | 1875W | 2800W | 3750W |
| Resolution | 0.1W | 0.1W | 0.1W | 0.1W | 0.1W | 0.1W |
| Accuracy | ±(0.1% of setting + 0.1% of range) | | | | | |
| CREST FACTOR (CC & CP MODE ONLY) | | | | | | |
| Range | √2-5 | | | √2-5 | | |
| Resolution | 0.1 | | | 0.1 | | |
| Accuracy | (0.5% / Irms) + 1% F.S. | | | (0.5% / Irms) + 1% F.S. | | |
| POWER FACTOR (CC & CP MODE ONLY) | | | | | | |
| Range | 0-1 Lag or Lead | | | 0-1 Lag or Lead | | |
| Resolution | 0.01 | | | 0.01 | | |
| Accuracy | 1% F.S. | | | 1% F.S. | | |
| TEST MODE | | | | | | |
| UPS Efficient Measurement | Non-Linear Mode | | | Non-Linear Mode | | |
| Operating Frequency | Auto; 40-440Hz | | | Auto; 40-440Hz | | |
| Current Range | 0-18.75A | 0-28A | 0-37.5A | 0-18.75A | 0-28A | 0-37.5A |
| PF Range | 0-1 | | | 0-1 | | |
| Measuring Efficiency For PV Systems, Power Conditioners for THD 80% | | | | | | |
| Operating Frequency | Resistive + Non-Linear Mode | | | Resistive + Non-Linear Mode | | |
| Auto; 40-440Hz | | | | | | |
| Current Range | 0-18.75A | 0-28A | 0-37.5A | 0-18.75A | 0-28A | 0-37.5A |
| Resistive Range | 3.2 ohm - 64k ohm | 2.0 ohm - 40k ohm | 1.6 ohm - 32k ohm | 3.2 ohm - 64k ohm | 2.0 ohm - 40k ohm | 1.6 ohm - 32k ohm |
| UPS Back-Up Function(CC,LIN,CR,CP) | | | | | | |
| UVP (VTH) | 50-350Vrms / 500Vdc | | | 50-425Vrms / 600Vdc | | |
| UPS Back-Up Time | 1-99999 Sec. (>27H) | | | 1-99999 Sec. (>27H) | | |
| Battery Discharge Function(CCLIN,CR,CP) | | | | | | |
| UVP (VTH) | 50-350Vrms / 500Vdc | | | 50-425Vrms / 600Vdc | | |
| Battery Discharge Time | 1-99999 Sec. (>27H) | | | 1-99999 Sec. (>27H) | | |
| UPS Transfer Time | | | | | | |
| Current Range | 0-18.75A | 0-28A | 0-37.5A | 0-18.75A | 0-28A | 0-37.5A |
| UVP (VTH) | 2.5V | | | 2.5V | | |
| Time Range | 0.15ms-999.99ms | | | 0.15ms-999.99ms | | |
| Fuse Test Mode | | | | | | |
| Turbo OFF | 18.75Arms | | | 18.75Arms | | |
| Turbo ON | 37.5Arms (x2) ³ | | | 37.5Arms (x2) ³ | | |
| Trip & Non-Trip Time | Turbo OFF | | | Turbo OFF | | |
| Turbo ON | 0.1-1.0Sec | | | 0.1-1.0Sec | | |
| Meas. Accuracy | ±0.003 Sec | | | ±0.003 Sec | | |
| Repeat Cycle | 0-255 | | | 0-255 | | |
| Short/OPP/OCF Test Function | | | | | | |
| Short Time | Turbo OFF | | | Turbo OFF | | |
| Turbo ON | 0.1-15Sec | | | 0.1-15Sec | | |
| OPP/OCF Step Time | Turbo OFF | | | Turbo OFF | | |
| Turbo ON | 100ms, up to 10 Steps | | | 100ms, up to 10 Steps | | |
| OCF Istop | Turbo OFF | | | Turbo OFF | | |
| Turbo ON | 18.75Arms | | | 18.75Arms | | |
| OPP Pstop | Turbo OFF | | | Turbo OFF | | |
| Turbo ON | 37.5Arms | | | 37.5Arms | | |
| Programmable Inrush Current Simulation: Istart - Istop / Tsep | | | | | | |
| Istart, Inrush Start Current | 0-37.5A | 0-56A | 0-75A | 0-37.5A | 0-56A | 0-75A |
| Inrush Stop Time | 0.1ms-100ms | | | 0.1ms-100ms | | |
| Inrush, Inrush Stop Current | 0-18.75A | 0-28A | 0-37.5A | 0-18.75A | 0-28A | 0-37.5A |
| Programmable Surge Current Simulation: S1/T1 - S2/T2 - S3/T3 | | | | | | |
| S1 and S2 Current | 0-37.5A | 0-56A | 0-75A | 0-37.5A | 0-56A | 0-75A |
| T1 and T2 Time | 0.01-0.55Sec | | | 0.01-0.55Sec | | |
| S3 Current | 0-18.75A | 0-28A | 0-37.5A | 0-18.75A | 0-28A | 0-37.5A |
| T3 Time | 0.01-9.99Sec. or Cont. | | | 0.01-9.99Sec. or Cont. | | |
| MEASUREMENTS | | | | | | |
| VOLTAGE READBACK V METER | | | | | | |
| Range | 500V | | | 600V | | |
| Resolution | 0.01V | | | 0.01V | | |
| Accuracy | ±0.05% of (reading + range) | | | ±0.05% of (reading + range) | | |
| Parameter | Vrms,V Max/Min,+/-Vpk | | | Vrms,V Max/Min,+/-Vpk | | |
| CURRENT READBACK A METER | | | | | | |
| Range | 9.375Arms/18.75Arms | 14Arms/28Arms | 18.75Arms/37.5Arms | 9.375Arms/18.75Arms | 14Arms/28Arms | 18.75Arms/37.5Arms |
| Resolution | 0.2mA/0.4mA | 0.3mA/0.6mA | 0.4mA/0.8mA | 0.2mA/0.4mA | 0.3mA/0.6mA | 0.4mA/0.8mA |
| Accuracy | ±0.05% of (reading + range) @ 50/60Hz | | | | | |
| Parameter | Irms,I Max/Min,+/-Ipk | | | Irms,I Max/Min,+/-Ipk | | |
| WATT READBACK W METER | | | | | | |
| Range | 1875W | 2800W | 3750W | 1875W | 2800W | 3750W |
| Resolution | 0.03125W | 0.05W | 0.0625W | 0.03125W | 0.05W | 0.0625W |
| Accuracy | ±0.1% of (reading + range) | | | ±0.1% of (reading + range) | | |
| VA METER | VrmsxArms Correspond To Vrms and Arms | | | | | |
| POWER FACTOR METER | | | | | | |
| Range | +/- 0.000-1.000 | | | +/- 0.000-1.000 | | |
| Accuracy | ±(0.002±(0.001/PPF)*F) | | | ±(0.002±(0.001/PPF)*F) | | |
| FREQUENCY METER(V) | | | | | | |
| Range | DC,40-440Hz | | | DC,40-440Hz | | |
| Accuracy | 0.1% | | | 0.1% | | |
| Other Parameter METER | VA, VAR, CF, I, Ipeak, Imax, Imin, Vmax, Vmin, IHD, VHD, ITHD, VTHD | | | | | |
| OTHERS | | | | | | |
| Start up Loading | Yes, Power on loading during Inverter / UPS start up | | | Yes, Power on loading during Inverter / UPS start up | | |
| Load ON / OFF Angle | 0 - 359 degree can be programmed for the angle of load ON and load OFF loading | | | 0 - 359 degree can be programmed for the angle of load ON and load OFF loading | | |
| Half Cycle and SCR/TRIAC Loading | Positive or Negative half cycle, 90 Trailing edge or Leading edge current waveform can be programmed | | | Positive or Negative half cycle, 90 Trailing edge or Leading edge current waveform can be programmed | | |
| Master/Slave (3 Phase or Parallel Application) | Yes, 1 master and upto 7 slave units | | | Yes, 1 master and upto 7 slave units | | |
| External Programming Input (OPTION) | F.S / 10Vdc, Resolution 0.1V | | | F.S / 10Vdc, Resolution 0.1V | | |
| External SYNC Input | TTT | | | TTT | | |
| Vmonitor (Isolated) | ±500V ±10V | | | ±600V ±10V | | |
| Imonitor (Isolated) | ±56.25Apk / ±10Vpk | ±84Apk / ±10Vpk | ±112.5Apk / ±10Vpk | ±56.25Apk / ±10Vpk | ±84Apk / ±10Vpk | ±112.5Apk / ±10Vpk |
| Interface (OPTION) | GPIB ; RS-232 ; LAN ; USB | | | GPIB ; RS-232 ; LAN ; USB | | |
| MAX. Power Consumption | 150VA | | | 150VA | | |
| Operating Temperature ² | 0 - 40 °C | | | | | |
| Current of Input Impedance(mA)@50/60Hz ; @ 400Hz | -V ⁰ 0.3 ; -V ² 2 | -V ⁰ 0.45 ; -V ³ 3 | -V ⁰ 0.6 ; -V ⁴ 4 | -V ⁰ 0.3 ; -V ² 2 | -V ⁰ 0.45 ; -V ³ 3 | -V ⁰ 0.6 ; -V ⁴ 4 |
| Dimensions(H x W x D) | 177 x 440 x 558 mm | 177 x 440 x 558mm | 177 x 440 x 558 mm | 177 x 440 x 558 mm | 177 x 440 x 558mm | 177 x 440 x 558 mm |
| Weight | 21.5kg | 27.5kg | 33.5kg | 21.5kg | 27.5kg | 33.5kg |

*1 ms (millisiemens) is the unit of conductance(G), one siemens equal to 1/Ω
 *2 Operating temperature range is 0-40°C, all specification apply for 25°C±5°C, Except as noted
 *3 Turbo mode for up to 2X Current rating & Power rating support Fuse, Short/OCF/OPP test function

* All specifications apply for 50/60Hz
 * All specifications subject to change without notice
 * Input AC Power : 100-240 Vac ±10%, 50/60Hz, Single-phase

AC & DC Electronic Load

SPECIFICATIONS

| MODEL | AEL-5006-350-56 | AEL-5008-350-75 | AEL-5012-350-112.5 | AEL-5015-350-112.5 | AEL-5019-350-112.5 | AEL-5023-350-112.5 |
|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|
| Power (W) | 5600 W | 7500 W | 11250 W | 15000 W | 18750 W | 22500 W |
| Current(Ampere) | 56 Arms / 168Apeak | 75 Arms / 225Apeak | 112.5 Arms / 337.5Apeak | 112.5 Arms / 337.5Apeak | 112.5 Arms / 337.5Apeak | 112.5 Arms / 337.5Apeak |
| Voltage(Volt) | 50-350Vrms / 500Vdc | | | | | |
| FREQUENCY Range | DC, 40-440Hz(CC, CP Mode), DC-440Hz(LIN, CR, CV Mode) | | | | | |
| PROTECTIONS | | | | | | |
| Over Power Protection | ≠ 5880Wrms or Programmable | ≠ 7875Wrms or Programmable | ≠ 11812.5Wrms or Programmable | ≠ 11812.5Wrms or Programmable | ≠ 19687.5Wrms or Programmable | ≠ 23625Wrms or Programmable |
| Over Current Protection | ≠ 58.8 Arms, or Programmable | ≠ 78.75 Arms, or Programmable | ≠ 118.125 Arms or Programmable | ≠ 118.125 Arms or Programmable | ≠ 118.125 Arms or Programmable | ≠ 118.125 Arms or Programmable |
| Over Voltage Protection | ≠ 367.5 Vrms/525Vdc | | | | | |
| Over Temp. Protection | Yes | | | | | |
| OPERATION MODE | | | | | | |
| Constant Current Mode for Sine-Wave | | | | | | |
| Range | 0-56A | 0-75A | 0-112.5A | 0-112.5A | 0-112.5A | 0-112.5A |
| Resolution | 1mA/16bits | 1.25mA/16bits | 1.875mA/16bits | 1.875mA/16bits | 1.875mA/16bits | 1.875mA/16bits |
| Accuracy | ± (0.1% of setting + 0.2% of range) @ 50/60Hz | | | | | |
| Linear Constant Current Mode for Sine-Wave, Square-Wave or Quasi-Square Wave, PWM Wave | | | | | | |
| Range | 0-56A | 0-75A | 0-112.5A | 0-112.5A | 0-112.5A | 0-112.5A |
| Resolution | 1mA/16bits | 1.25mA/16bits | 1.875mA/16bits | 1.875mA/16bits | 1.875mA/16bits | 1.875mA/16bits |
| Accuracy | ± (0.1% of setting + 0.2% of range) @ 50/60Hz | | | | | |
| Constant Resistance Mode | | | | | | |
| Range | 1 ohm - 20k ohm | 0.8 ohm - 16k ohm | 0.533 ohm - 10.666k ohm | 0.533 ohm - 10.666k ohm | 0.533 ohm - 10.666k ohm | 0.533 ohm - 10.666k ohm |
| Resolution*1 | 0.016666mS/16bits | 0.020832mS/16bits | 0.031248mS/16bits | 0.031248mS/16bits | 0.031248mS/16bits | 0.031248mS/16bits |
| Accuracy | ±0.2% of (setting + range) @ 50/60Hz | | | | | |
| Constant Voltage Mode | | | | | | |
| Range | 50-350Vrms / 500Vdc | | | | | |
| Resolution | 0.1V | | | | | |
| Accuracy | ±0.2% of (setting + range) @ 50/60Hz | | | | | |
| Constant Power Mode | | | | | | |
| Range | 5600W | 7500W | 11250W | 15000 W | 18750W | 22500W |
| Resolution | 0.1W | 0.1W | 1W | 1W | 1W | 1W |
| Accuracy | ±0.2% of (setting + range) @ 50/60Hz | | | | | |
| CREST FACTOR (CC & CP MODE ONLY) | | | | | | |
| Range | √2-5 | | | | | |
| Resolution | 0.1 | | | | | |
| Accuracy | (0.5% / Irms) + 1% F.S. | | | | | |
| POWER FACTOR (CC & CP MODE ONLY) | | | | | | |
| Range | 0-1 Lag or Lead | | | | | |
| Resolution | 0.01 | | | | | |
| Accuracy | 1% F.S. | | | | | |
| TEST MODE | | | | | | |
| UPS Efficient Measurement | | | | | | |
| Operating Frequency | Non-Linear Mode | | | | | |
| Current Range | 0-56A | 0-75A | 0-112.5A | 0-112.5A | 0-112.5A | 0-112.5A |
| PF Range | Auto ; 40-440Hz | | | | | |
| Measuring Efficiency for PV Systems, Power Conditioners for THD 80% | | | | | | |
| Operating Frequency | Resistive + Non-Linear Mode | | | | | |
| Current Range | 0-56A | 0-75A | 0-112.5A | 0-112.5A | 0-112.5A | 0-112.5A |
| Resistive Range | 1 ohm - 20k ohm | 0.8 ohm - 16k ohm | 0.533 ohm - 10.666k ohm | 0.533 ohm - 10.666k ohm | 0.533 ohm - 10.666k ohm | 0.533 ohm - 10.666k ohm |
| UPS Back-Up Function(CC,LIN,CR,CP) | | | | | | |
| UVP (VTH) | 50-350Vrms / 500Vdc | | | | | |
| UPS Back-Up Time | 1-99999 Sec. (>27H) | | | | | |
| Battery Discharge Function(CC,LIN,CR,CP) | | | | | | |
| UVP (VTH) | 50-350Vrms / 500Vdc | | | | | |
| Battery Discharge Time | 1-99999 Sec. (>27H) | | | | | |
| UPS Transfer Time | | | | | | |
| Current Range | 0-56A | 0-75A | 0-112.5A | 0-112.5A | 0-112.5A | 0-112.5A |
| UVP (VTH) | 2.5V | | | | | |
| Time range | 0.15ms-999.99ms | | | | | |
| Fuse Test Mode | | | | | | |
| Max. Current | Turbo OFF 75Arms Turbo ON 150Arms (x2) ^{*)} | Turbo OFF 75Arms Turbo ON 150Arms (x2) ^{*)} | Turbo OFF 112.5Arms Turbo ON 225Arms (x2) ^{*)} | Turbo OFF 112.5Arms Turbo ON 225Arms (x2) ^{*)} | Turbo OFF 112.5Arms Turbo ON 225Arms (x2) ^{*)} | Turbo OFF 112.5Arms Turbo ON 225Arms (x2) ^{*)} |
| Trip & Non-Trip Time | 0.1-9999.9Sec. | | | | | |
| Meas. Accuracy | 0.1-1.0Sec. | | | | | |
| Repeat Cycle | ±0.003 Sec. | | | | | |
| Short/OPP/OCF Test Function | | | | | | |
| Short Time | Turbo OFF Turbo ON | 0.1-10Sec. or Cont. | | | | |
| OPP/OCF Step Time | Turbo OFF Turbo ON | 0.1-15Sec. 100ms | | | | |
| OCF Istop | Turbo OFF Turbo ON | 56Arms 112Arms | | | | |
| OPP Pstop | Turbo OFF Turbo ON | 5600W 11200W | | | | |
| Programmable Inrush Current Simulation: Istart - Istop / Tsep | | | | | | |
| Istart, Inrush Start Current | 0-112A | 0-150A | 0-225A | 0-225A | 0-225A | 0-225A |
| Inrush Stop Time | 0.1ms-100ms | | | | | |
| Istop, Inrush Stop Current | 0-56A | 0-75A | 0-112.5A | 0-112.5A | 0-112.5A | 0-112.5A |
| Programmable Surge Current Simulation: S1/T1 - S2/T2 - S3/T3 | | | | | | |
| S1 and S2 Current | 0-112A | 0-150A | 0-225A | 0-225A | 0-225A | 0-225A |
| T1 and T2 Time | 0.01-0.5Sec. | | | | | |
| S3 Current | 0-56A | 0-75A | 0-112.5A | 0-112.5A | 0-112.5A | 0-112.5A |
| T3 Time | 0.01-9.99Sec. or Cont. | | | | | |
| MEASUREMENTS | | | | | | |
| VOLTAGE READBACK A METER | | | | | | |
| Range | 500V | | | | | |
| Resolution | 0.01V | | | | | |
| Accuracy | ±0.05% of (reading + range) | | | | | |
| Parameter | Vrms, V Max/Min, +/-Vpk | | | | | |
| CURRENT READBACK A METER | | | | | | |
| Range | 28Arms/56Arms | 37.5Arms/75Arms | 56.25Arms/112.5Arms | 56.25Arms/112.5Arms | 56.25Arms/112.5Arms | 56.25Arms/112.5Arms |
| Resolution | 0.6mA/1.2mA | 0.8mA/1.6mA | 1.2mA/2.4mA | 1.2mA/2.4mA | 1.2mA/2.4mA | 1.2mA/2.4mA |
| Accuracy | ±0.1% of (reading + range) @ 50/60Hz | | | | | |
| Parameter | Irms, I Max/Min, +/-Ipk | | | | | |
| WATT READBACK W METER | | | | | | |
| Range | 5600W | 7500W | 11250W | 15000W | 18750W | 22500W |
| Resolution | 0.1W | 0.125W | 0.1875W | 0.25W | 0.3125W | 0.375W |
| Accuracy | ±0.2% of (reading + range) @ 50/60Hz ; ±0.4% of (reading + range) | | | | | |
| VA METER | | | | | | |
| Power Factor METER | VrmsxArms Correspond To Vrms and Arms | | | | | |
| Range | +/- 0.000-1.000 | | | | | |
| Accuracy | ±(0.002±(0.001/PPF)*PF) | | | | | |
| FREQUENCY METER(V) | | | | | | |
| Range | DC, 40-440Hz | | | | | |
| Accuracy | 0.1% | | | | | |
| Other Parameter METER | | | | | | |
| VA, VAR, CF, I, Ipeak, Imax., Imin, Vmax., Vmin., IHD, VHD, ITHD, VTHD | | | | | | |
| OTHERS | | | | | | |
| Start up Loading | Yes, Power on loading during inverter / UPS start up | | | | | |
| Load ON / OFF Angle | 0 - 359 degree can be programmed for the angle of load ON and load OFF loading | | | | | |
| Half Cycle and SCR/TRIAC Loading | Positive or Negative half cycle, 90 Trailing edge or Leading edge current waveform can be programmed | | | | | |
| Master/Slave (3 Phase or Parallel Application) | Yes, 1 master and upto 7 slave unit | | | | | |
| External Programming Input (OPTION) | F.S / 10Vdc, Resolution 0.1V | | | | | |
| External SYNC Input | TTL | | | | | |
| Vmonitor (Isolated) | ±500V ±10V | | | | | |
| Imonitor (Isolated) | ±168Apk / ±10Vpk | ±225Apk / ±10Vpk | ±337.5Apk / ±10Vpk | ±337.5Apk / ±10Vpk | ±337.5Apk / ±10Vpk | ±337.5Apk / ±10Vpk |
| Interface (OPTION) | GPIB ; RS-232 ; LAN ; USB | | | | | |
| MAX. Power Consumption | 270VA | 270VA | 390VA | 510VA | 630VA | 750VA |
| Operation Temperature *2 | | | | | | |
| Current of Input Impedance(mA)@50/60Hz ; @ 400Hz | -V*0.9 ; -V*6.6 | -V*1.2 ; -V*8.8 | -V*1.8 ; -V*13.2 | -V*2.4 ; -V*17.6 | -V*3.0 ; -V*22 | -V*3.6 ; -V*26.4 |
| Dimension(H x W x D) | 458 x 480 x 590 mm | 458 x 480 x 590 mm | 636 x 480 x 590 mm | 814 x 480 x 590 mm | 1283 x 600 x 600 mm | 1283 x 600 x 600 mm |
| Weight | 58 kg | 70 kg | 105kg | 140kg | 260kg | 295kg |

*1 ms (millisiemens) is the unit of conductance(G), one siemens equal to 1/Ω

*2 Operating temperature range is 0-40°C, all specification apply for 25°C±5°C, Except as noted

*3 Turbo mode for up to 2X Current rating & Power rating support Fuse, Short/OCF/OPP test function

* All specifications apply for 50/60Hz

* All specifications subject to change without notice

* Input AC Power : 100-240 Vac ±10%, 50/60Hz, Single-phase

AC & DC Electronic Load

SPECIFICATIONS

| MODEL | AEL-5006-425-56 | AEL-5008-425-75 | AEL-5012-425-112.5 | AEL-5015-425-112.5 | AEL-5019-425-112.5 | AEL-5023-425-112.5 |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Power (W) | 5600 W | 7500 W | 11250W | 15000 W | 18750W | 22500W |
| Current(Ampere) | 56 Arms / 168Apeak | 75 Arms / 225Apeak | 112.5 Arms / 337.5Apeak | 112.5 Arms / 337.5Apeak | 112.5 Arms / 337.5Apeak | 112.5 Arms / 337.5Apeak |
| Voltage(Volt) | 50-425Vrms / 600Vdc | | | | | |
| FREQUENCY Range | DC, 40-440Hz (CC, CP Mode), DC, 40-440Hz (LIN, CR, CV Mode) | | | | | |
| PROTECTIONS | Over Power Protection \approx 5880Wrms or Programmable \approx 7875Wrms or Programmable \approx 11812.5Wrms or Programmable \approx 15750Wrms or Programmable \approx 19687.5Wrms or Programmable \approx 23625Wrms or Programmable Over Current Protection \approx 58.8 Arms, or Programmable \approx 78.75 Arms, or Programmable \approx 118.125 Arms or Programmable \approx 118.125 Arms or Programmable \approx 118.125 Arms or Programmable \approx 118.125 Arms or Programmable Over Voltage Protection \approx 446.25 Vrms/630Vdc Over Temp. Protection Yes | | | | | |
| OPERATION MODE | Constant Current Mode for Sine-Wave Range 0-56A 0-75A 0-112.5A 0-112.5A 0-112.5A 0-112.5A Resolution 1mA/16bits 1.25mA/16bits 1.875mA/16bits 1.875mA/16bits 1.875mA/16bits 1.875mA/16bits Accuracy \pm (0.1% of setting + 0.2% of range) @ 50/60Hz Linear Constant Current Mode for Sine-Wave, Square-Wave or Quasi-Square Wave, PWM Wave Range 0-56A 0-75A 0-112.5A 0-112.5A 0-112.5A 0-112.5A Resolution 1mA/16bits 1.25mA/16bits 1.875mA/16bits 1.875mA/16bits 1.875mA/16bits 1.875mA/16bits Accuracy \pm (0.1% of setting + 0.2% of range) @ 50/60Hz Constant Resistance Mode Range 1 ohm - 20k ohm 0.8 ohm - 16k ohm 0.533 ohm - 10.666k ohm 0.533 ohm - 10.666k ohm 0.533 ohm - 10.666k ohm 0.533 ohm - 10.666k ohm Resolution*1 0.016666mS/16bits 0.020832mS/16bits 0.031248mS/16bits 0.031248mS/16bits 0.031248mS/16bits 0.031248mS/16bits Accuracy \pm 0.2% of (setting + range) @ 50/60Hz Constant Voltage Mode Range 50-425Vrms / 600Vdc Resolution 0.1V Accuracy \pm 0.2% of (setting + range) @ 50/60Hz Constant Power Mode Range 5600W 7500W 11250W 15000 W 18750W 22500W Resolution 0.1W 0.1W 1W 1W 1W 1W Accuracy \pm 0.2% of (setting + range) @ 50/60Hz CREST FACTOR (CC & CP MODE ONLY) Range -2-5 Resolution 0.1 Accuracy (0.5% / Irms) + 1% F.S. POWER FACTOR (CC & CP MODE ONLY) Range 0-1 Lag or Lead Resolution 0.01 Accuracy 1% F.S. TEST MODE UPS Efficient Measurement Operating Frequency Non-Linear Mode Current Range Auto: 40-440Hz PF Range 0-1 Measuring Efficiency For PV Systems, Power Conditioners for THD 80% Operating Frequency Resistive + Non-Linear Mode Auto: 40-440Hz Current Range 0-56A 0-75A 0-112.5A 0-112.5A 0-112.5A 0-112.5A Resistive Range 1 ohm - 20k ohm 0.8 ohm - 16k ohm 0.533 ohm - 10.666k ohm 0.533 ohm - 10.666k ohm 0.533 ohm - 10.666k ohm 0.533 ohm - 10.666k ohm UPS Back-Up Function(CC,LIN,CR,CP) LVP (VTH) 50-425Vrms / 600Vdc UPS Back-Up Time 1-99999 Sec. (\approx 27H) Battery Discharge Function(CC,LIN,CR,CP) LVP (VTH) 50-425Vrms / 600Vdc Battery Discharge Time 1-99999 Sec. (\approx 27H) UPS Transfer Time Current Range 0-56A 0-75A 0-112.5A 0-112.5A 0-112.5A 0-112.5A LVP (VTH) 2.5V Time range 0.15ms-999.99ms Fuse Test Mode Turbo OFF 75Arms 75Arms 112.5Arms 112.5Arms 112.5Arms 112.5Arms Turbo ON 150Arms (x2) [†] 150Arms (x2) [†] 225Arms (x2) [‡] 225Arms (x2) [‡] 225Arms (x2) [‡] 225Arms (x2) [‡] Trip & Non-Trip Time Turbo OFF 0.1-9999.9Sec. Turbo ON 0.1-1.05Sec. Meas. Accuracy \pm 0.003 Sec. Repeat Cycle 0-255 Short/OPP/OCF Test Function Short Time Turbo OFF 0.1-105Sec. or Cont. Turbo ON 0.1-15Sec. OPP/OCF Step Time Turbo OFF 100ms Turbo ON 100ms, up to 10 Steps OCP Istop Turbo OFF 56Arms 75Arms 112.5Arms 112.5Arms 112.5Arms 112.5Arms Turbo ON 112Arms 150Arms 225Arms 225Arms 225Arms 225Arms OPP Pstop Turbo OFF 5600W 7500W 11250W 15000W 18750W 22500W Turbo ON 11200W 15000W 22500W 30000W 37500W 45000W Programmable Inrush Current Simulation: Istart - Istop / Tsep Istart, Inrush Start Current 0-112A 0-150A 0-225A 0-225A 0-225A 0-225A Inrush Stop Time 0-56A 0-75A 0-112.5A 0-112.5A 0-112.5A 0-112.5A Istop, Inrush Stop Current 0-112A 0-150A 0-225A 0-225A 0-225A 0-225A Programmable Surge Current Simulation: S1/T1 - S2/T2 - S3/T3 S1 and S2 Current 0-112A 0-150A 0-225A 0-225A 0-225A 0-225A T1 and T2 Time 0.01-0.55Sec. S3 Current 0-56A 0-75A 0-112.5A 0-112.5A 0-112.5A 0-112.5A T3 Time 0.01-9.99Sec. or Cont. | | | | | |
| MEASUREMENTS | VOLTAGE READBACK A METER Range 600V Resolution 0.01V Accuracy \pm 0.05% of (reading + range) Parameter Vrms, V Max/Min, +/-Vpk CURRENT READBACK A METER Range 28Arms/56Arms 37.5Arms/75Arms 56.25Arms/112.5Arms 56.25Arms/112.5Arms 56.25Arms/112.5Arms 56.25Arms/112.5Arms Resolution 0.6mA/1.2mA 0.8mA/1.6mA 1.2mA/2.4mA 1.2mA/2.4mA 1.2mA/2.4mA 1.2mA/2.4mA Accuracy \pm 0.1% of (reading + range) @ 50/60Hz Parameter Irms, I Max/Min, +/-Ipk WATT READBACK W METER Range 5600W 7500W 11250W 15000W 18750W 22500W Resolution 0.1W 0.125W 0.1875W 0.25W 0.3125W 0.375W Accuracy \pm 0.2% of (reading + range) @ 50/60Hz, \pm 0.4% of (reading + range) VA METER Parameter Vrms x Arms Correspond To Vrms and Arms Power Factor METER Range +/- 0.000-1.000 Accuracy \pm (0.002+(0.001/ PF)*F) Frequency METER(V) Range DC, 40-440Hz Accuracy 0.1% Other Parameter METER VA, VAR, CF, I, Ipeak, Imax., Imin, Vmax., Vmin., IHD, VHD, ITHD, VTHD | | | | | |
| OTHERS | Start up Loading Yes, Power on loading during Inverter / UPS start up Load ON / OFF Angle 0 - 359 degree can be programmed for the angle of load ON and load OFF loading Half Cycle and SCR/TRIAC Loading Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed Master/Slave (3 Phase or Parallel Application) Yes, 1 master and upto 7 slave unit External Programming Input (OPTION) F.S. / 10Vdc, Resolution 0.1V External SYNC Input TT Vmonitor (Isolated) \pm 600V \pm 10V Imonitor (Isolated) \pm 168Apk / \pm 10Vpk \pm 225Apk / \pm 10Vpk \pm 337.5Apk / \pm 10Vpk \pm 337.5Apk / \pm 10Vpk \pm 337.5Apk / \pm 10Vpk \pm 337.5Apk / \pm 10Vpk Interface (OPTION) GPIB ; RS-232 ; LAN ; USB MAX. Power Consumption 270VA 270VA 390VA 510VA 630VA 750VA Operation Temperature *2 0 - 40 °C Current of Input Impedance(mA)@50/60Hz; @ 400Hz -V*0.9; -V*6.6 -V*1.2; -V*8.8 -V*1.8; -V*13.2 -V*2.4; -V*17.6 -V*3.0; -V*22 -V*3.6; -V*26.4 Dimension(H x W x D) 458 x 480 x 590 mm 458 x 480 x 590 mm 636 x 480 x 590 mm 814 x 480 x 590 mm 1283 x 600 x 600 mm 1283 x 600 x 600 mm Weight 58 kg 70 kg 105kg 140kg 260kg 295kg | | | | | |

*1 ms (millisiemens) is the unit of conductance(G), one siemens equal to 1/Ω

*2 Operating temperature range is 0-40°C, all specification apply for 25°C±5°C, Except as noted

*3 Turbo mode for up to 2X Current rating & Power rating support Fuse, Short/OPP/OPP test function

* All specifications apply for 50/60Hz

* All specifications subject to change without notice

* Input AC Power : 100-240 Vac \pm 10%, 50/60Hz, Single-phase

AC & DC Electronic Load

| SPECIFICATIONS | | | |
|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------|------------------------------|
| MODEL | AEL-5003-480-18.75 | | AEL-5004-480-28 |
| Power (W) | 2800W | | 3750 W |
| Current(Ampere) | 18.75 Arms / 56.25Apeak | | 28 Arms / 84Apeak |
| Voltage(Volt) | 50-480Vrms / 700Vdc | | |
| FREQUENCY Range | DC,40-70Hz(CC,CP Mode) , DC-70Hz(LIN,CR,CV Mode) | | |
| PROTECTIONS | | | |
| Over Power Protection | ≈2940Wrms or Programmable | | ≈ 3927.5Wrms or Programmable |
| Over Current Protection | ≈ 19.687 Arms or Programmable | | ≈ 29.4 Arms or Programmable |
| Over Voltage Protection | ≈ 504Vrms / 735Vdc | | |
| Over Temp. Protection | Yes | | |
| OPERATION MODE | | | |
| Constant Current Mode for Sine-Wave | | | |
| Range | 0-18.75A | | 0-28A |
| Resolution | 0.3125mA/16bits | | 0.5mA/16bits |
| Accuracy | ± (0.1% of setting + 0.2% of range) @ 50/60Hz | | |
| Linear Constant Current Mode for Sine-Wave, Square-Wave or Quasi-Square Wave, PWM Wave | | | |
| Range | 0-18.75A | | 0-28A |
| Resolution | 0.3125mA/16bits | | 0.5mA/16bits |
| Accuracy | ± (0.1% of setting + 0.2% of range) @ 50/60Hz | | |
| Constant Resistance Mode | | | |
| Range | 4 ohm - 80k ohm | | 2.5 ohm - 50k ohm |
| Resolution*1 | 0.004166mS/16bits | | 0.006666mS/16bits |
| Accuracy | ±0.2% of (setting + range) @ 50/60Hz | | |
| Constant Voltage Mode | | | |
| Range | 50-480Vrms / 700Vdc | | |
| Resolution | 0.0125V | | |
| Accuracy | ±(0.1% of setting + 0.1% of range) | | |
| Constant Power Mode | | | |
| Range | 2800W | | 3750W |
| Resolution | 0.1W | | 0.1W |
| Accuracy | ±(0.1% of setting + 0.1% of range) | | |
| CREST FACTOR (CC & CP MODE ONLY) | | | |
| Range | 2-5 | | |
| Resolution | 0.1 | | |
| Accuracy | (0.5% / Irms) + 1% F.S. | | |
| POWER FACTOR (CC & CP MODE ONLY) | | | |
| Range | 0-1 Lag or Lead | | |
| Resolution | 0.01 | | |
| Accuracy | 1% F.S. | | |
| TEST MODE | | | |
| UPS Efficient Measurement | | | |
| Operating Frequency | Non-Linear Mode | | |
| Current Range | Auto ; 40-70Hz | | 0-28A |
| PF Range | 0-1 | | |
| Measuring Efficiency For PV Systems, Power Conditioners for THD 80% | | | |
| Operating Frequency | Auto ; 40-70Hz | | |
| Current Range | 0-18.75A | | 0-28A |
| Resistive Range | 4 ohm - 80k ohm | | 2.5 ohm - 50k ohm |
| UPS Back-Up Function(CC,LIN,CR,CP) | | | |
| LVP (VTH) | 50-480Vrms / 700Vdc | | |
| LVP Back-Up Time | 1-99999 Sec. (>27H) | | |
| Battery Discharge Function(CC,LIN,CR,CP) | | | |
| LVP (VTH) | 50-480Vrms / 700Vdc | | |
| Battery Discharge Time | 1-99999 Sec. (>27H) | | |
| UPS Transfer Time | | | |
| Current Range | 0-18.75A | | 0-28A |
| LVP (VTH) | 2.5V | | |
| Time range | 0.15ms-999.99ms | | |
| Fuse Test Mode | | | |
| Max. Current | Turbo OFF | 18.75Arms | 28.0Arms |
| | Turbo ON | 37.5Arms (x2) *3 | 56.0Arms (x2) *3 |
| Trip & Non-Trip Time | Turbo OFF | 0.1-9999.9Sec. | |
| | Turbo ON | 0.1-1.0Sec. | |
| Meas. Accuracy | ±0.003 Sec. | | |
| Repeat Cycle | 0-255 | | |
| Short/OPP/OCF Test Function | | | |
| Short Time | Turbo OFF | 0.1-10Sec. or Cont. | |
| | Turbo ON | 0.1-1Sec. | |
| OPP/OCF Step Time | Turbo OFF | 100ms | |
| | Turbo ON | 100ms, up to 10 Steps | |
| OCF Istop | Turbo OFF | 18.75Arms | 28.0Arms |
| | Turbo ON | 37.5Arms | 56.0Arms |
| OPP Pstop | Turbo OFF | 2800W | 3750W |
| | Turbo ON | 5600W | 7500W |
| Programmable Inrush Current Simulation: Istart - Istop / Tsep | | | |
| Istart, Inrush Start Current | 0-37.5A | | 0-56A |
| Inrush Step Time | 0.1ms-100ms | | |
| Istop, Inrush Stop Current | 0-18.75A | | 0-28A |
| Programmable Surge Current Simulation: S1/T1 - S2/T2 - S3/T3 | | | |
| S1 and S2 Current | 0-37.5A | | 0-56A |
| T1 and T2 Time | 0.01-0.5Sec. | | |
| S3 Current | 0-18.75A | | 0-28A |
| T3 Time | 0.01-9.99Sec. or Cont. | | |
| MEASUREMENTS | | | |
| VOLTAGE READBACK V METER | | | |
| Range | 700V | | |
| Resolution | 0.0125V | | |
| Accuracy | ±0.05% of (reading + range) | | |
| Parameter | Vrms,V Max/Min, +/-Vpk | | |
| CURRENT READBACK A METER | | | |
| Range | 9.375Arms/18.75Arms | | 14Arms/28Arms |
| Resolution | 0.2mA/0.4mA | | 0.3mA/0.6mA |
| Accuracy | ±0.05% of (reading + range) @ 50/60Hz | | |
| Parameter | Irms,I Max/Min, +/-Ipk | | |
| WATT READBACK W METER | | | |
| Range | 2800W | | 3750W |
| Resolution | 0.05W | | 0.0625W |
| Accuracy | ±0.1% of (reading + range) | | |
| VA METER | VrmsxArms Correspond To Vrms and Arms | | |
| Power Factor METER | | | |
| Range | +/- 0.000-1.000 | | |
| Accuracy | ±(0.002±(0.001/PF)*F) | | |
| Frequency METER(V) | | | |
| Range | DC,40-70Hz | | |
| Accuracy | 0.1% | | |
| Other Parameter METER | | | |
| VA, VAR, CF, I, Ipeak, Imax, Imin, Vmax, Vmin, IHD, VHD, ITHD, VTHD | | | |
| OTHERS | | | |
| Start up Loading | Yes , Power on loading during Inverter / UPS start up | | |
| Load ON / OFF Angle | 0 - 359 degree can be programmed for the angle of load ON and load OFF loading | | |
| Half Cycle and SCR/TRIAC Loading | Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed | | |
| Master/Slave (3 Phase or Parallel Application) | Yes, 1 master and upto 7 slave units | | |
| External Programming Input (OPTION) | F.S / 10Vdc, Resolution 0.1V | | |
| External SYNC Input | TTL | | |
| Vmonitor (Isolated) | ±700V / ±10V | | |
| Imonitor (Isolated) | ±56.25Apk / ±10Vpk | | ±84Apk / ±10Vpk |
| Interface (OPTION) | GPIB ; RS-232 ; LAN ; USB | | |
| MAX. Power Consumption | 150VA | | |
| Operation Temperature *2 | 0 - 40 °C | | |
| Current of Input Impedance(mA)@50/60Hz ; @ 400Hz | -V*0.3 ; -V*2.2 | | -V*0.4 ; -V*2.95 |
| Dimension (H x W x D) | 177 x 440 x 558 mm | | 177 x 440 x 558 mm |
| Weight | 27.5kg | | 33.5kg |

*1 ms (millisiemens) is the unit of conductance(G), one siemens equal to 1/Ω
 *2 Operating temperature range is 0-40°C, all specification apply for 25°C±5°C, Except as noted
 *3 Turbo mode for up to 2X Current rating & Power rating support Fuse, Short/OPP/OPP test function

* All specifications apply for 50/60Hz
 * All specifications subject to change without notice
 * Input AC Power : 100-240 Vac ±10%, 50/60Hz, Single-phase

PEL-022 GPIB Card



PEL-023 RS-232 Card



PEL-024 LAN Card



PEL-025 USB Card



PEL-028 HANDLES, U-shaped handle (for AEL-5006/5008/5012/5015)



PEL-029 HANDLES Rack Accessories (for AEL-5002/5003/5004)



AC & DC Electronic Load

ORDERING INFORMATION

| | | |
|---------------------------|--------------------|-------------------------|
| AEL-5002-350-18.75 | 350V/18.75A/1875W | AC & DC Electronic Load |
| AEL-5003-350-28 | 350V/28A/2800W | AC & DC Electronic Load |
| AEL-5004-350-37.5 | 350V/37.5A/3750W | AC & DC Electronic Load |
| AEL-5006-350-56 | 350V/56A/5600W | AC & DC Electronic Load |
| AEL-5008-350-75 | 350V/75A/7500W | AC & DC Electronic Load |
| AEL-5012-350-112.5 | 350V/112.5A/11250W | AC & DC Electronic Load |
| AEL-5015-350-112.5 | 350V/112.5A/15000W | AC & DC Electronic Load |
| AEL-5019-350-112.5 | 350V/112.5A/18750W | AC & DC Electronic Load |
| AEL-5023-350-112.5 | 350V/112.5A/22500W | AC & DC Electronic Load |
| AEL-5002-425-18.75 | 425V/18.75A/1875W | AC & DC Electronic Load |
| AEL-5003-425-28 | 425V/28A/2800W | AC & DC Electronic Load |
| AEL-5004-425-37.5 | 425V/37.5A/3750W | AC & DC Electronic Load |
| AEL-5006-425-56 | 425V/56A/5600W | AC & DC Electronic Load |
| AEL-5008-425-75 | 425V/75A/7500W | AC & DC Electronic Load |
| AEL-5012-425-112.5 | 425V/112.5A/11250W | AC & DC Electronic Load |
| AEL-5015-425-112.5 | 425V/112.5A/15000W | AC & DC Electronic Load |
| AEL-5019-425-112.5 | 425V/112.5A/18750W | AC & DC Electronic Load |
| AEL-5023-425-112.5 | 425V/112.5A/22500W | AC & DC Electronic Load |
| AEL-5003-480-18.75 | 480V/18.75A/2800W | AC & DC Electronic Load |
| AEL-5004-480-28 | 480V/28A/3750W | AC & DC Electronic Load |





AEL-5015-425-112.5

Power rating: 15-> 15kW
 Maximum output current: 112.5-> 112.5A
 Maximum output voltage: 425-> 425V

STANDARD ACCESSORIES

AEL-5000 Series operation manual
 HD-DSUB : 15pin MALE to MALE 150cm x 1
 PTV1-12 PIN TRML : Please refer to Fig.1 x 6

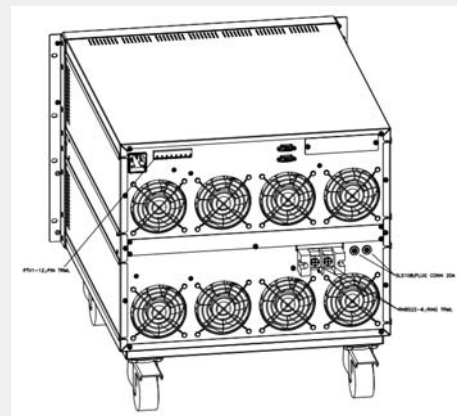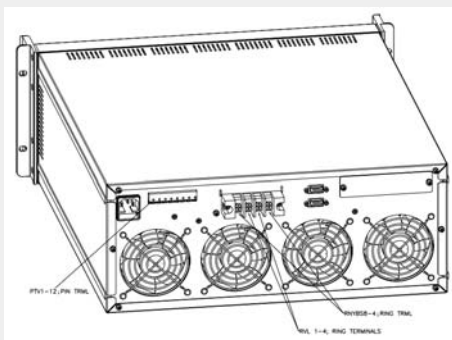


AEL-5002-xxx-18.75/AEL-5003-xxx-28/AEL-5004-xxx-37.5
 PVL 1-4 RING TERMINALS : Please refer to Fig.4 x 2
 RNYBS8-4 RING TRML : Please refer to Fig.5 x 2

**AEL-5006-xxx-56/AEL-5008-xxx-78/AEL-5012-xxx-112.5/
 AEL-5015-xxx-112.5/AEL-5019-xxx-112.5/AEL-5023-xxx/112.5**
SLS10B RED PLUG CONN 20A RED : Please refer to Fig.2;
 The terminal is used for Vsense x 1
SLS10B BLK PLUG CONN 20A BLK : Please refer to Fig.2;
 The terminal is used for Vsense x 1
RNB S22-6 RING TRML, #4 : Please refer to Fig.3 x 2

AC & DC Electronic Load

ORDERING INFORMATION

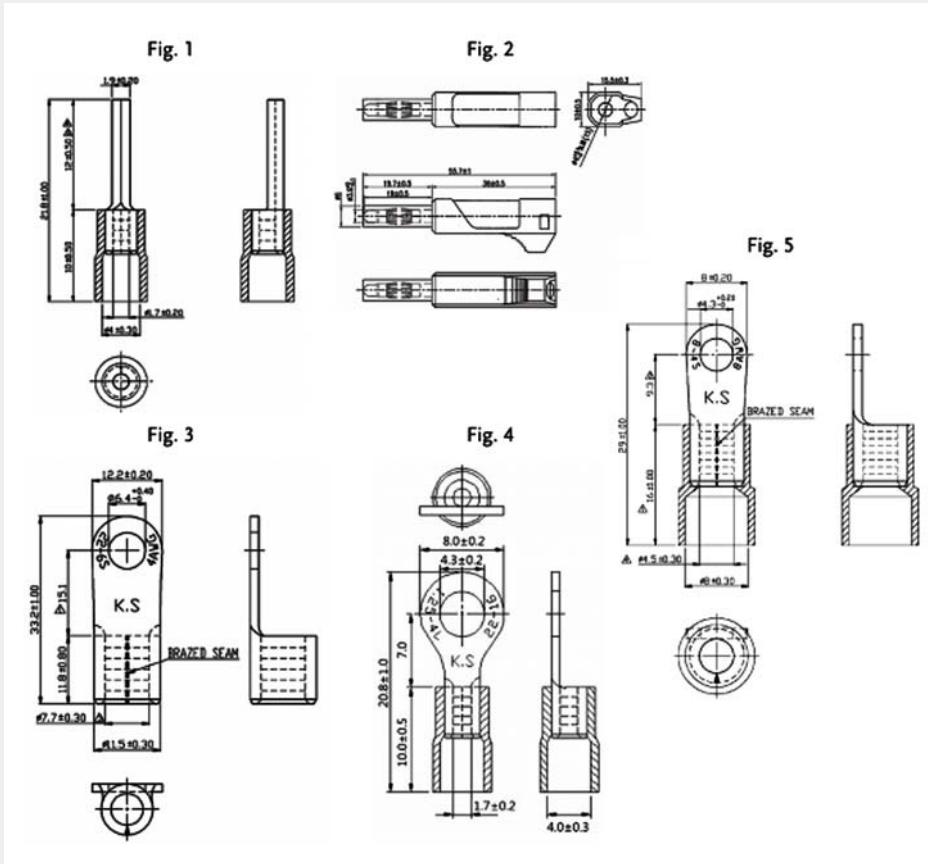

OPTIONAL ACCESSORIES

| | | | |
|----------------|-----------------------------------------------------------------------------|----------------|--------------------------------------|
| PEL-022 | GPIB Card | GTL-246 | USB Cable, USB 2.0, A-B Type, 1200mm |
| PEL-023 | RS-232 Card | GTL-248 | GPIB Cable, Double Shielded, 2000mm |
| PEL-024 | LAN Card | GTL-250 | GPIB Cable, Double Shielded, 600mm |
| PEL-025 | USB Card | | |
| PEL-028 | HANDLES, U-shaped handle(fixed to the bracket)(for AEL-5006/5008/5012/5015) | | |
| PEL-029 | HANDLES Rack Accessories(for AEL-5002/5003/5004) | | |
| PEL-030 | GPIB+RS-232 Card | | |

Note: * Regarding the product delivery date, please contact your regional sales representative.

Global Headquarters

GOOD WILL INSTRUMENT CO., LTD.

T +886-2-2268-0389 F +886-2-2268-0639

China Subsidiary

GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary

GOOD WILL INSTRUMENT (SEA) SDN. BHD.

T +604-6111122 F +604-6115225

Europe Subsidiary

GOOD WILL INSTRUMENT EURO B.V.

T +31(0)40-2557790 F +31(0)40-2541194

U.S.A. Subsidiary

INSTEK AMERICA CORP.

T +1-909-399-3535 F +1-909-399-0819

Japan Subsidiary

TEXIO TECHNOLOGY CORPORATION.

T +81-45-620-2305 F +81-45-534-7181

Korea Subsidiary

GOOD WILL INSTRUMENT KOREA CO., LTD.

T +82-2-3439-2205 F +82-2-3439-2207

India Subsidiary

GW INSTEK INDIA LLP.

T +91-80-6811-0600 F +91-80-6811-0626

GW INSTEK

Simply Reliable



Website



Facebook



LinkedIn

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Power Supplies](#) category:

Click to view products by [GW INSTEK](#) manufacturer:

Other Similar products are found below :

[73-147-000](#) [73-270-000](#) [73-316-4020](#) [73-317-0005](#) [73-495-0333](#) [73-951-0001C](#) [73-961-4086-G2](#) [GLD150-48-103-G](#) [OVS-12F](#) [OVS-12J](#)
[OVS-15J](#) [IVS13Q2Q1F4LL030ANJCUNR32](#) [LB115S48KH](#) [FP2-PSA1](#) [IMP4-3O1-2J1-05-B-662](#) [UPS40-3003](#) [LB240S48KH](#) [LMM409](#)
[CHASSIS](#) [VAS003ZG](#) [73-166-000](#) [73-271-000](#) [73-961-0048](#) [73-961-4085-G2](#) [73-962-0001](#) [OVS-15G](#) [1-155777G](#) [OVS-24F](#) [73-551-5086](#)
[73-713-001](#) [73-540-0001](#) [DUAL OUTPUT CABLE SET](#) [73-560-434](#) [73-963-0048-G2](#) [73-963-0024-G2](#) [73-317-0048](#) [73-495-0555](#) [AC6-](#)
[02C2C-02-R](#) [VA-A2104827](#) [MVX-G2771015](#) [AC4-OOT2B-00](#) [VA-D1139247](#) [MVX-E2973822](#) [85055](#) [451-002145-0000](#) [ACV15N3](#)
[CVN300-96P01A](#) [NFN40-7942](#) [SS500-3405-401](#) [VS1-L4-00-CE](#) [MP4-1W-4EE-4NN-00](#)