




AFG-3000 Series

Arbitrary Function Generator

FEATURES


- 1 μ Hz ~ 20 or 30MHz, 20Vpp, 1 or 2 Channel (s)
- Arbitrary Waveform 250MSa/s, 16-bit Resolution, 8M Memory Depth
- Isolation Channel Circuit Design
- Synchronized Phase Operates up to 6 Units and 12 Channels
- Harmonic Signal Generator
- Dual Channel Models Support SUM Modulation, Coupling, Tracking, and Phase Functions
- Pulse Waveform Parameters Can be Set Independently
- Built-in AM/FM/PM/FSK/PWM/SUM Modulation, Sweep and Burst Functions
- Built-in Medical and Automotive Electronic Waveforms
- Built-in I/Q baseband Waveform on AFG-3032/3022
- Provide USB/LAN/GPIB (Optional) Instrument Control Interface

PANEL INTRODUCTION

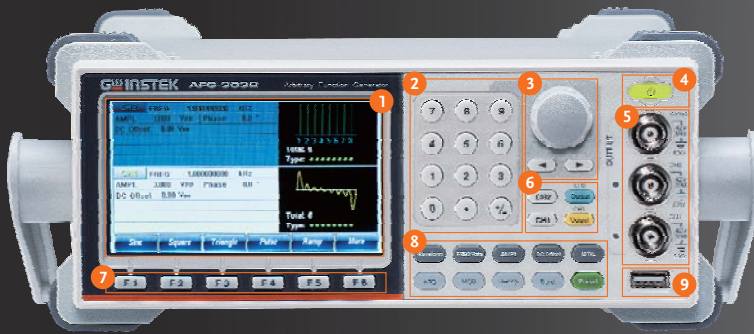

AFG-3032/3022

1. TFT LCD Panel
2. Number Panel
3. Scroll Knob & Selection Key
4. Power Switch
5. Output Terminals
6. Main Output Switch
7. Function Keys
8. Operation Keys
9. USB Host
10. Trigger & Modulation Input
11. 10MHz REF Input & Output
12. Fan
13. GPIB
14. LAN
15. USB Device

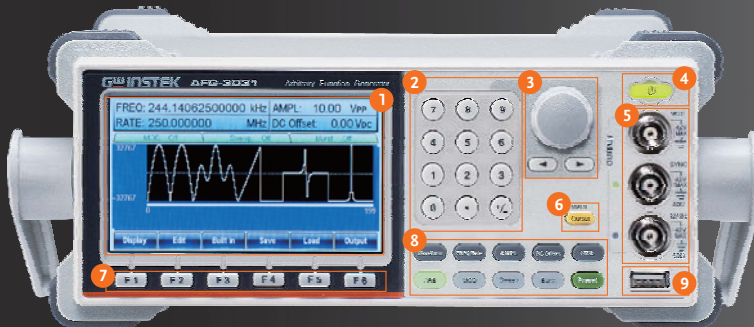

AFG-3031/3021

1. TFT LCD Panel
2. Number Panel
3. Scroll Knob & Selection Key
4. Power Switch
5. Output Terminals
6. Main Output Switch
7. Function Keys
8. Operation Keys
9. USB Host
10. Trigger & Modulation Input
11. 10MHz REF Input & Output
12. Fan
13. GPIB
14. LAN
15. USB Device



The AFG-3000 Series Comes With Four Models. Model Number and Channel (s) are Listed as Follows:

MODEL	AFG-3031	AFG-3032	AFG-3021	AFG-3022
MAIN FUNCTION				
Frequency Range	1 μ Hz ~ 30 MHz	1 μ Hz ~ 30 MHz	1 μ Hz ~ 20 MHz	1 μ Hz ~ 20 MHz
Channel	1	2	1	2

GW Instek AFG-3000 Series arbitrary function generators include 20MHz/30MHz single isolated channel and 20MHz/30MHz dual isolated channel models, designed to meet industry, scientific research, and education applications. Not only output channel is earth ground isolation, dual channel models are also independently earth ground isolation, which is suitable for floating circuits (up to $\pm 42V$). Without taking grounding reference into consideration, each channel of dual channel models can be operated independently and multi ARB units can output simultaneously. Applications are, for instance, the ignition control or transmission device of automotive electronics. The series features sample rate of 250MSa/s, 16-bit resolution, and 8M point memory depth arbitrary waveform characteristics. Users can rebuild maximum 8M memory depth waveforms through using a GW Instek digital storage oscilloscope with the built-in DSOLink function of the AFG-3000 Series.

The series supports synchronized phase for multi channel operation and the maximum phase synchronization operation is up to 6 units and 12 channels. 10 MHz atomic clock frequency standard can be input via external signal source to elevate precision for frequency output. The series supports frequency sweep and amplitude sweep that can also integrate functions, including linear/logarithm, one-way (saw tooth)/two-way (triangle) waveforms, continuous/single trigger/gated trigger to meet various application requirements by applying different sweep methods. Frequency sweep tests the frequency response of electronic components such as filter and low frequency amplifier. Amplitude sweep simulates vibration tests (requires a vibration tester), and it also conducts aging tests of various materials and linearity tests of low frequency amplifier.



The main features of the AFG-3000 Series include output amplitude from 1mVpp to 10Vpp (connected with a 50 ohm load); frequency range from 1uHz to 20MHz or 30MHz; 1uHz frequency resolution; and built-in sine, square, pulse, triangle, ramp, DC voltage, harmonic and noise. The waveform width, rise edge time and fall edge time of pulse waveform can be adjusted flexibly. Pulse waveform, with duty cycle from 0.017% to 99.983%, can be applied as trigger signals. Users can conduct arbitrary editing via 65 built-in function waveforms. The series supports AM/FM/PM/FSK/PWM modulation, frequency sweep, amplitude sweep and burst to satisfy industrial application requirements. Dual channel models provide SUM modulation, coupling, tracking, and phase to meet the test requirements of differential signal, phase control and amplifier distortion. Built-in 8th harmonic signal generator simulates harmonic signal of switching power supplies and it also tests EMI power filter characteristics. The AFG-3000 Series provides free arbitrary waveform editing software (AWES) for users to quickly edit waveforms from the built-in diagrams so as to execute measurements.

A. CIRCUIT DESIGN FOR GROUND ISOLATION AMONG OUTPUT/INPUT TERMINAL, INSTRUMENT CHASSIS, AND DUAL CHANNELS



Channel 1, channel 2, reference 10 MHz input, synchronization and modulation input/output connector grounding are isolated from instrument chassis. The output channels of dual channel models are independently isolated. These connectors can sustain maximum isolation voltage up to $\pm 42V_{pk}$ (DC+ AC peak value) to earth ground that is ideal for floating circuit tests. Multi units output can be achieved without factoring in grounding reference issue. Applications include ignition controller or transmission devices of automotive electronics. The built-in DC bias voltage of the AFG-3000 Series can be applied on various waveforms. The DC bias voltage is $\pm 5V$ under 50 Ω load. For automotive electronic applications require higher DC bias voltage such as ignition controller or transmission devices, the external power supplies can be used to bring up the DC bias voltage to $\pm 42V_{pk}$ (DC+ AC peak value).

B. MULTI CHANNEL SYNCHRONIZED PHASE OPERATION

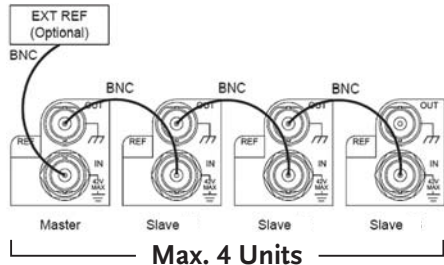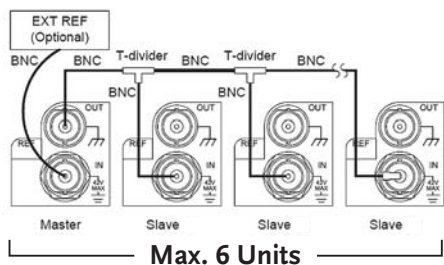


Method one uses reference frequency output (REF OUT) and reference frequency input (REF IN), 50 ohm BNC cable (RG-58A/U) and T type BNC connector to connect up to 6 units to conduct synchronized phase operation.

Method two uses reference frequency output (REF OUT) and reference frequency input (REF IN), 50 ohm BNC cable (RG-58A/U) to connect up to 4 units to conduct synchronized phase operation.

Users can implement multi channel synchronized phase operation up to 6 units and 12 channels (AFG-3032/3022). There are two methods to execute synchronized phase applications. Under different frequency, master unit can synchronize each channel and modulate individual phase.

At 10 MHz reference frequency input (REF IN) connector, users can input 10 MHz atomic clock frequency standard via external signal source to enhance precision for frequency output.

C. HARMONIC SIGNAL GENERATOR



Harmonic Signal Generator

Harmonic Signal

Harmonic signal generator simulates the harmonic signal of switching power supplies and conducts characteristics tests on EMI power filter. Users can set order number and phase for harmonic signals to obtain desired signals. The following diagrams show 8th harmonic signal.

D. PULSE GENERATOR




Pulse Generator


Pulse Signal

The output frequency for pulse reaches 25 MHz and its duty cycle is from 0.017% to 99.983%. Users can set pulse width, duty cycle, rise edge time, fall edge time and edge time to support trigger signal. The following diagrams show settings for pulse signal.


E. VERSATILE OUTPUT WAVEFORM SELECTIONS




Sine




Square



Triangle




Harmonic



Ramp



Pulse




Noise




DC Voltage


MEDICAL APPLICATION WAVEFORMS




ECG1



ECG2



ECG3




Cardiac.


AUTOMOTIVE ELECTRONIC WAVEFORMS




Ignition



ISO7637-2 TP3A



ISO7637-2 TP3B

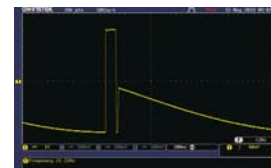


ISO7637-2 TP2B

101 built-in function waveforms include engineering applications, medical electronics, automotive electronic waveforms mathematics, and standard waveforms such as sine, square,

triangle, ramp, pulse, noise, harmonic, and DC voltage that allow users to easily select desired waveforms. Users can select and edit 101 function waveforms from the arbitrary function.

F. IQ BASEBAND WAVEFORM OUTPUT FUNCTION FOR AFG-3032/3022




FSK



MSK



PSK




QAM


The CH1 and CH2 of AFG-3032/22 provide the IQ baseband waveform outputs, which include ASK, MSK, FSK(2FSK, 4FSK, 8FSK), PSK(BPSK,QPSK,DQPSK,QQPSK,pi/4 QPSK,pi/4DQPSK,

8PSK), APSK(16APSK, 32APSK), QAM(16QAM, 32QAM, 64QAM), etc. New IQ waveform commands are also available in the user manual.


G. MODULATION FUNCTION




Amplitude Modulation




Frequency Modulation

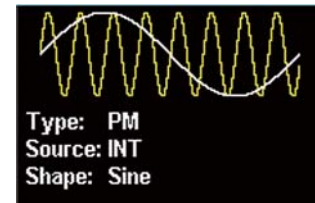


Phase Modulation



Frequency-shift Keying Modulation



Pulse Width Modulation




Sum Modulation


The series supports AM, FM, PM, FSK, PWM and SUM modulation. Modulation source can be from inside or outside.

Applications include the baseband of communications systems, motor control and light adjustment, etc.

H. SWEEP FUNCTION




Amplitude Sweep Setting



Amplitude Sweep Signal



Frequency Sweep Setting



Frequency Sweep Signal


The series supports frequency sweep and amplitude sweep that can also integrate functions, including linear/logarithm, one-way (saw tooth)/two-way (triangle) waveforms, continuous/single trigger/gated trigger to meet various application requirements by different sweep methods. Frequency sweep carries out tests

on the frequency response of electronic components such as filter and low frequency amplifier. Amplitude sweep simulates vibration tests (requires a vibration tester), and it also conducts aging tests of various materials and linearity tests of low frequency amplifier.

I. BURST FUNCTION



Burst Setting




Burst Signal

The series supports N-period or gated trigger. Phase angle, duration time, frequency, waveform infinite can be adjusted to meet non-continuous output applications.

J. FLEXIBLE ARBITRARY WAVEFORM EDITING

Four methods to obtain arbitrary waveforms

- Front Panel Operation

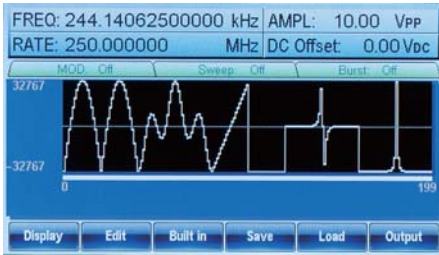

Via single unit's panel, arbitrary waveforms can be selected, edited, stored, recalled, output, triggered from 65 built-in waveforms.

- Direct Waveform Reconstruction (DWR)



Direct Waveform Reconstruction from the DSO

Collocate with GDS series digital oscilloscopes to retrieve waveforms and upload them to arbitrary generator to achieve direct waveform reconstruction.

- CSV file Upload

	A	B	C
1	Start:		0
2	Length:		629
3	Sample Rate:		20000000
4			0
5			328
6			655
7			983
8			1310

```


% sine wave generation program
result=round(2^16*sin(0.01:2*pi));
save gensin csv result /ascii;
% end

Start: 0
Length: 629
Sample Rate: 20000000
0
328
655
983
1310
1638
    
```

Supports CSV file

Support CSV file upload produced by MATLAB and Excel.

- Arbitrary Waveform Editing PC Software




A Sinc Waveform with Gaussian Noise




Digital Signal

Use AWES to edit complex waveforms. The software supports waveform mathematical operation. The waveform series includes Uniform Noise, Gaussian Noise, Rayleigh Noise, various digital codes such as non zero code, Manchester and RS-232, etc.


K. CORRELATED FUNCTIONS OF DUAL CHANNEL OUTPUTS



Differential Signal



Sine and Cosine Signal



Square Signal Phase Adjustment

AFG-3032/3022 models support independent channel or correlated channel applications. Four correlated functions are provided including SUM modulation, coupling, tracking, and phase.

- * SUM modulation combines two signals and outputs the signal via one single channel. Combining noise and sine waveform to execute speaker's distortion test is one of the applications.
- * Coupling function arbitrarily sets ratio and difference for frequency and amplitude between two channels to realize a simultaneous effect for all parameters of dual channel. The example is amplifier using third order interpolation point(IP3) measurement to simulate signal output of two different frequency oscillators.

- * Tracking function produces differential signal with same frequency, same amplitude, and 180 degree phase difference.
- * Phase function arbitrarily sets phase parameters between two channels such as simulating sine/ cosine/square signal phase adjustment.

SPECIFICATIONS

		AFG-3031	AFG-3032	AFG-3021	AFG-3022
CHANNELS		1	2	1	2
FEATURES	I/O Signal Ground for the Instrument Chassis	Connector shells for channel output(s), Sync output, 10MHz REF Input, Mod Input and Mod output are isolated from the instrument's chassis. Maximum allowable voltage on isolated connector shells is ±42 Vpk. (DC + AC Peak)			
	Each of the Signal Ground of CH1/CH2	—	Isolated	—	Isolated
ARBITRARY WAVEFORMS	Standard Waveforms	Sine, Square, Triangle, Ramp, Pulse, Noise, Harmonic			
	Sample Rate Repetition Rate Waveform Length Amplitude Resolution Non-Volatile Memory User define Output Section Trigger Built-in Arbitrary Waveforms	250 MSa/s 125MHz 8M points 16 bits Ten 8M waveforms (1) Any section from 2 ~ 8M points Infinite/Manual/External Sine, Square, Ramp, Sinc, Exp Rise, Exp Fall, DC, Pulse, Abstan, Havercosine, Sinever, Absin, Haversine, Stair_down, Absinehalf, N_pulse, Stair_UD, Ampalt, Negramp, Stair_up, Attalt, Rectpuls1, Stepres, Diric_even, Roundhalf, Trapezia, Diric_odd, Sawtoot, Tripuls1, Gauspuls1, Sinetra, Dlorentz, Ln, Sqrt, Since, Lorentz, Xsquare, Gauss, Arccos, Arctan, Sech, Arccot, Arctanh, Sinh, Arcsc, Cosh, Tan, Arcsec, Cot, Tanh, Arcsin, Csc, Arcsinh, Sec, Barthannwin, Chebwin, Kaiser, Bartlett, Flattopwin, Triang, Blackman, Hamming, Tukeywin, Bohmanwin, Hann, Cardiac, EOG, EEG, EMG, PLETH, RESP, ECG1, ECG2, ECG3, ECG4, ECG5, ECG6, ECG7, ECG8, ECG9, ECG10, ECG11, ECG12, ECG13, ECG14, ECG15, LFPULSE, TENS1, TENS2, TENS3, IGNITION, SP, VR, TP1, TP2A, TP2B, TP3A, TP3B, TP4, TP5A, TP5B <i>Note: It is required to update the ARB data first prior to enabling both Medical (Cardiac, EOG, EEG, EMG, PLETH, RESP, ECG1, ECG2, ECG3, ECG4, ECG5, ECG6, ECG7, ECG8, ECG9, ECG10, ECG11, ECG12, ECG13, ECG14, ECG15, LFPULSE, TENS1, TENS2, TENS3) and AutoElec (IGNITION, SP, VR, TP1, TP2A, TP2B, TP3A, TP3B, TP4, TP5A, TP5B) waveforms.</i>			
IQ WAVEFORMS	Source Type	Random, Fixed Pattern ASK, MSK, FSK, 2FSK, 4FSK, 8FSK, BPSK, QPSK, DQPSK, OQPSK, pi/4-QPSK, pi/4-DQPSK, 8PSK, 16APSK, 32APSK, 16QAM, 32QAM, 64QAM			
FREQUENCY CHARACTERISTICS	Sine / Square Pulse	1µHz ~ 30MHz 1µHz ~ 25MHz	1µHz ~ 30MHz 1µHz ~ 25MHz	1µHz ~ 20MHz 1µHz ~ 20MHz	1µHz ~ 20MHz 1µHz ~ 20MHz
	Triangle / Ramp Resolution Accuracy	1µHz ~ 1MHz 1µHz ±1 ppm 0 ~ 50°C ; ±0.3 ppm 18 ~ 28°C ±1 ppm, per 1 year ≤ 1 µHz			
OUTPUT CHARACTERISTICS (2)	Amplitude	1 mVpp ~ 10 Vpp (into 50Ω); 2 mVpp to 20 Vpp (into open-circuit) ± 1% of setting ±1 mVpp (at 1 kHz / into 50Ω without DC offset) 0.1 mV or 4 digits 0.1dB <10 MHz; 0.2 dB 10 MHz ~ 30 MHz (sinewave relative to 1 kHz/into 50Ω) Vpp, Vrms, dBm,			
	Offset Waveform Output SYNC Output	±5 Vpk ac + dc (into 50Ω) ; ±10Vpk ac +dc (into open circuit) 1% of setting + 2 mV+ 0.5% of amplitude 50Ω typical (fixed); > 10MΩ (output disabled) Short-circuit protected ; Overload relay automatically disables main output 42Vpk max. TTL-compatible into>1kΩ 50Ω nominal			
SINE WAVE CHARACTERISTICS	Harmonic Distortion(5)	-60 dBc DC ~ 1 MHz, Ampl<3 Vpp; -55 dBc DC ~ 1 MHz Ampl>3 Vpp -45 dBc 1MHz ~ 5 MHz, Ampl>3 Vpp; -30 dBc 5MHz ~ 30 MHz, Ampl>3 Vpp			
	Total Harmonic Distortion Spurious (non-harmonic)(5) Phase Noise	<0.2%+0.1mVrms; DC ~ 20 kHz -60 dBc DC~1 MHz; -50 dBc 1MHz~20MHz; -50 dBc+ 6 dBc/octave 1MHz~30MHz(AFG-3031/3032only) <-110dBc/Hz typical, 15 kHz offset, fc = 10MHz			
SQUARE WAVE CHARACTERISTICS	Rise/Fall Time	<8 ns (3)			
	Overshoot Asymmetry(@50% duty) Variable Duty Cycle	< 5% 1% of period+1 ns 20.0%~80.0%, ≤ 25 MHz; 40.0%~60.0%, 25~30MHz			
RAMP CHARACTERISTICS	Jitter	0.01%+525ps<2 MHz; 0.1%+75ps>2 MHz			
	Linearity Variable Symmetry	< 0.1% of peak output 0% ~ 100% (0.1% resolution)			
PULSE CHARACTERISTICS	Pulse Width	20ns ~ 999.830s(Extended mode 0.00ns~1.000ks ^{ns}); Width-0.625 x [(Rise Time-0.6ns)+(Fall Time-0.6ns)] ≥ 0 ; Period ≥ Width-0.625 x [(Rise Time-0.6ns)+(Fall Time-0.6ns)]			
	Duty Setting Range Period Rise Time and Fall Time ^{ns} Resolution Overshoot Jitter	0.017% ~ 99.983%(Extended mode 0.0000%~100,0000% ^{ns}) 40ns ~ 1,000,000s 9.32ns ~ 799.89ks 0.0001% <5% 100 ppm + 50 ps			
NOISE	Noise Type Noise Bandwidth	Gaussian 100MHz equivalent bandwidth			
HARMONIC	Harmonic Order Harmonic Type	≤ 8 Even, Odd, All, User ; Amplitude and Phase can be set for all harmonics			
AM and AM(DSB-SC)	Carrier Waveforms Modulating Waveforms Modulating Frequency Depth Source	Sine, Square, Triangle, Ramp, Pulse, Arb Sine, Square, Triangle, Up/Dn Ramp 2 mHz ~ 20 kHz 0% ~ 120.0% Internal / External			
FM	Carrier Waveforms Modulating Waveforms Modulating Frequency Peak Deviation Source	Sine, Square, Triangle, Ramp Sine, Square, Triangle, Up/Dn Ramp 2 mHz ~ 20 kHz DC ~ 30 MHz (1µHz resolution) Internal / External			
PM	Carrier Waveforms Modulating Waveforms Phase Deviation Modulating Frequency Source	Sine, Triangle, Ramp Sine, Square, Triangle, Up/Dn Ramp 0° ~ 360°, 0.1° resolution 2 mHz ~ 20 kHz Internal			
PWM	Carrier Waveforms Modulating Waveforms Modulating Frequency Deviation Source	Square Sine, Square, Triangle, Up/Dn Ramp 2 mHz ~ 20 kHz 0% ~ 100.0% of pulse width, 0.1% resolution Internal / External			
PSK	Carrier Waveforms Modulating Waveforms Internal Rate	Sine, Square, Triangle, Ramp 50% duty cycle square 2 mHz to 1 MHz			

SPECIFICATIONS

		AFG-3031	AFG-3032	AFG-3021	AFG-3022	
	Frequency Range	DC ~ 30 MHz		DC ~ 20 MHz		
	Source	Internal / External				
ADDITIVE MODULATION (SUM)	Carrier Waveforms	Sine, Triangle, Ramp, Pulse, Noise				
	Modulating Waveforms	Sine, Square, Triangle, Up/Dn Ramp				
	Ratio	0% ~ 100% of carrier amplitude, 0.01% resolution				
FSK	Modulating Frequency	2 mHz ~ 20 kHz				
	Source	Internal / External				
	Internal Rate	50% duty cycle square 2 mHz ~ 1 MHz				
	Frequency Range	DC ~ 30 MHz		DC ~ 20 MHz		
	Source	Internal / External				
SWEEP	Waveforms	Frequency Sweep : Sine, Square, Triangle, Ramp; Amplitude Sweep : Sine, Square, Triangle, Ramp, Pulse, Noise, ARB				
	Type	Frequency, Amplitude				
	Functions	Linear or Logarithmic				
	Direction	Up or Down				
	Start/Stop Frequency	Any frequency within the waveform's range				
	Sweep Time	1 ms ~ 500 s (1 ms resolution)				
	Trigger Mode	Single, External, Internal				
	Trigger Source	Internal / External				
BURST	Waveforms	Sine, Square, Triangle, Ramp, Pulse, Noise				
	Frequency	1 μHz ~ 30 MHz (4)	1 μHz ~ 30 MHz (4)	1 μHz ~ 20 MHz	1 μHz ~ 20 MHz	
	Burst Count	1 ~ 1,000,000 cycles or Infinite				
	Start / Stop Phase	-360.0 ~ +360.0 (0.1° resolution)				
	Internal Period	1 μs ~ 500 s				
	Gate Source	External Trigger (pulse waveforms can only be used in gate mode)				
	Trigger Source	Single, External or Internal Rate				
	Trigger Delay	N-Cycle, Infinite : 0 μs ~ 100s (1us resolution)				
	EXTERNAL MODULATION INPUT	Type	AM, AM (DSB-SC), FM, PWM, Sum			
		Voltage Range	± 5V full scale			
Input Impedance		10kΩ				
Frequency		DC ~ 20 kHz				
	Modulation Output	Yes	—	Yes	—	
	Type	AM, AM (DSB-SC), FM, PM, PWM, Sum, Sweep				
	Amplitude Range	≥ 1Vpp				
	Impedance	> 10kΩ typical				
EXTERNAL TRIGGER INPUT	Type	For FSK, Burst, Sweep, N Cycle ARB				
	Input Level	TTL Compatibility				
	Slope	Rising or Falling (Selectable)				
	Pulse Width	> 100 ns				
	Input rate	DC ~ 1 MHz				
	Input Impedance	10kΩ, DC coupled				
LATENCY	Sweep	< 1 μs (typical); Burst : < 0.55 ns (typical); ARB : < (27.5/sample rate)+274ns				
JITTER	Sweep	2.5 μs ; Burst : 1 ns , except pulse, 300 ps				
10MHz REFERENCE OUTPUT	Output Voltage	1 Vp-p / 50 Ω square wave				
	Output Impedance	50 Ω, AC coupled				
	Output Frequency	10MHz				
10MHz REFERENCE INPUT	Input Voltage	0.5Vpp ~ 5Vpp				
	Input Impedance	1k Ω, unbalanced , AC coupled				
	Input Frequency	10MHz ± 10Hz				
	Waveform	Sine or Square (50±5% duty)				
	Ground Isolation	42Vpk max.				
EXTERNAL-SYNC	Phase Delay (max.)	Series Connection : 39+(N-2) x 39 ±25nS; Parallel connection : (N-1) x 6 ±25nS (where N=number of connected units)				
	Maximum Number of Connected Units	Series Connection : 4 ; Parallel Connection : 6				
	Applicable Functions	Sine, Square, Triangle, Pulse, Ramp, Harmonic, MOD, Sweep, Burst				
	Store/Recall	10 Groups of Setting Memories				
	Interface	GPIB(Optional), LAN, USB				
	Display	4.3 inch TFT LCD, 480 x 3 (RGB) x 272				
GENERAL SPECIFICATIONS	Power Source	AC100 ~ 240V , 50 ~ 60Hz				
	Power Consumption	50VA	85VA	50VA	85VA	
	Operating Environment	Temperature to satisfy the specification : 18 ~ 28 °C; Operating temperature : 0 ~ 40 °C; Relative Humidity : ≤ 80%, 0 ~ 40°C ; ≤ 70%, 35 ~ 40°C ; Installation category : CAT II				
	Operating Altitude	2000 meters				
	Pollution Degree	IEC 61010 Degree 2, Indoor Use				
	Storage Temperature	-10 ~ 70 °C, Humidity: ≤ 70%				
	Dimensions & Weight	265 (W) x 107 (H) x 374 (D)mm, Approx. 4kg				

The specifications apply when the function generator is powered on for at least 30 minutes under +20°C~+30°C.

Specifications subject to change without notice. FG-303132GD1BH

- Note :
1. A total of ten waveforms can be stored (Every waveform can be composed of 8M points maximum)
 2. Add 1/10 th of output amplitude and offset specification per °C for operation outside of 0°C~28°C range (1-year specification)
 3. Edge time decreased at higher frequency
 4. Sine and square waveforms above 25 MHz are allowed only with an "Infinite" count
 5. Harmonic distortion and Spurious noise at low amplitudes is limited by a -70 dBm floor

6. Loss may occur if the pulse width is beyond the setting range of the normal mode. The pulse may vanish at times.
7. Rise time and Fall time should be ≥ 0.01% of period.

ORDERING INFORMATION

AFG-3031	30MHz Single channel Arbitrary Function Generator
AFG-3032	30MHz Dual channel Arbitrary Function Generator
AFG-3021	20MHz Single channel Arbitrary Function Generator
AFG-3022	20MHz Dual channel Arbitrary Function Generator

ACCESSORIES

Quick Start Guide x 1, CD-ROM with AFG software and user manual x 1	
GTL-110	BNC Cable, BNC(P/M)-BNC(P/M), 1000mm x 1 (only AFG-3031/3021)
GTL-110	BNC Cable, BNC(P/M)-BNC(P/M), 1000mm x 2 (only AFG-3032/AFG-3022)

OPTIONAL

Opt.01	GPIB Interface
GRA-432	Rack Adapter Panel

OPTIONAL ASSESSORIES

GTL-246	USB Type A to Type B cable
----------------	----------------------------

FREE DOWNLOAD

PC Software	Arbitrary Waveform Editing Software
--------------------	-------------------------------------

GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan
 T +886-2-2268-0389 F +886-2-2268-0639
 E-mail: marketing@goodwill.com.tw



Website



Facebook



LinkedIn

GW INSTEK

Simply Reliable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Frequency Counters](#) category:

Click to view products by [GW INSTRON](#) manufacturer:

Other Similar products are found below :

[3.060.200.383](#) [HK46.55.230VAC/50HZ + HK46DIN](#) [HK47.C.10-80VDC](#) [3.130.251.071.056](#) [3.220.401.075](#) [3.220.401.085](#) [3.223.401.075](#)
[3.223.401.351](#) [3.240.201.075](#) [3.242.201.075](#) [3.245.201.351](#) [TFG-3610E](#) [AX-DG105](#) [AX-DG2010AF](#) [3.100.200.383](#) [3.130.251.075.056](#)
[BZ220A](#) [3.220.401.351](#) [3.240.201.351](#) [3.241.201.351](#) [3.242.201.351](#) [3.245.201.075](#) [3.474.901.075](#) [3.474.911.373](#) [DDS-3X25](#) [0.170.000.075](#)
[0.135.200.373](#) [TF960](#) [TFG-3620E](#) [0.170.000.351](#) [TGF4162](#) [TGF4242](#) [GFG-3015 + RS232](#) [HK30.G.48.230VAC/50HZ](#)
[HK30.G.48.24VAC/50HZ](#) [0.135.200.302](#) [1856D](#) [53210A/903](#) [BG4017-1248](#) [BW4018-23050](#) [BW4018-2450](#) [BW7089-23050](#) [190.003](#)
[BW4018-23060](#) [MFG-2230M](#) [AFG-2012](#) [AFG-2105](#) [AFG-2112](#) [AFG-2225](#) [TGF4082](#)