



Quality Products. Service Excellence.

Audio Sound Distribution Line Matching 119 Series


Features



- Suitable for driving from solid state amplifiers where isolated windings are not required or can be used with our "Classic" 1600 tube output transformers to provide a 25V or 70V line output.
- 8 or 16 ohm input, 25V or 70V line output.
- Frequency response 50 Hz. to 10 KHz. at full ratings
- Leads 6" long minimum
- Can be reversed for operation at high power speaker locations.
- For speaker matching from older "Classic" 600 Ohm equipment - check out our **119DA** matching transformer.



Gallery

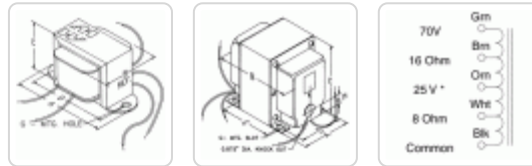

Part No.	Max Output (Watts)	Line Output	Mounting Type	Mounting				Wt. (lbs.)	Drawing Figure	Overall Dimensions						
				Centers	Hole	Slot	G			A	B	C	D	E		
119Y30	30	70 & 25v	Bracket	3.56		0.19		2.40	1.00	4.03	2.25	2.63	3.56	-		
119Y60	60	70 & 25v	X Mtg.	2.00	x	2.19	0.20	x	0.38	3.30	2.00	2.50	3.25	3.06	2.00	2.19
119Y100	100	70v only	X Mtg.	2.50	x	2.19	0.20	x	0.38	4.70	2.00	3.13	3.50	3.81	2.50	2.19
119Y250	250	70v only	X Mtg.	2.50	x	2.94	0.20	x	0.38	6.70	2.00	3.13	4.25	3.81	2.50	2.94

Data subject to change without notice

© 2022. Hammond Manufacturing Ltd. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Hammond](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [P2004NLT](#) [T1142NL](#) [HX6101FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#) [1879732-1](#)
[2-1879391-5](#)