




Quality Products. Service Excellence.

## Potted High Voltage (Plate) & Filament - 40 VA to 243 VA 300P Series

Universal Primary & 50/60 Hz Operation


### Features



- A perfect match to our **1650P potted output transformers**.
- Enclosed in a drawn steel case, the transformer is completely potted in epoxy.
- Mounting hardware included.
- Primary: Universal - 100, 110, 120, 200, 220, 240 VAC 50/60 Hz.
- Bias Tap: 50 VAC tap from high voltage secondary C.T.
- Highpot tested: 2,000 VAC
- Faraday Copper Primary Shield: Our electrostatic shield reduces the capacitive coupling from the primary - greatly attenuating higher frequency current coupling to the secondaries (shield is internally grounded to the end bell).
- Windings: Concentric wound for low stray field and low noise
- Finish: Black powder paint to match our **1650P** series of potted output transformers
- Units can be run full wave bridge or full wave C.T.
- c UL us recognized (E207860)



### Gallery

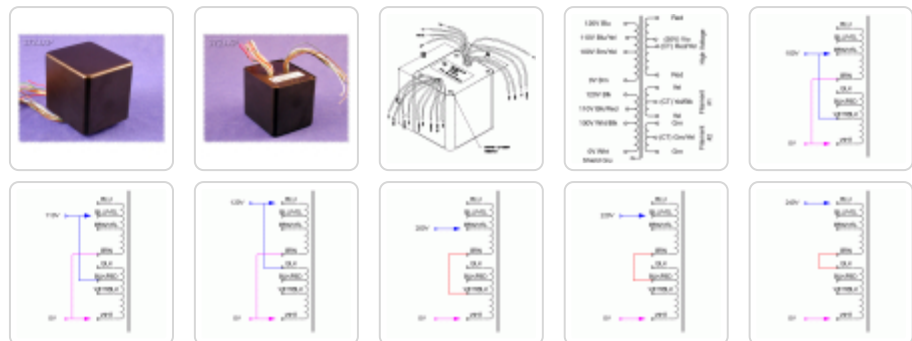

Part No.	VA	A.C. High Voltage Secondary R.M.S.	Bias Tap with High Voltage C.T.			Dimensions			Mounting Threaded Insert
			Grounded (VAC)	Filament #1 (VAC)	Filament #2 (VAC)	A	B	C	
369AXP	40	250V C.T. @ 115ma.	50	6.3V C.T. @ 2A	-	3.31	3.88	4.25	1/4-20
370XP	41	480V C.T. @ 46ma.	50	5V C.T. @ 2A	6.3V C.T. @ 1.5A	3.31	3.88	4.25	1/4-20
369GXP	50	450V C.T. @ 74ma.	50	6.3V C.T. @ 2.5A	-	3.31	3.88	4.25	1/4-20
369JXP	50	500V C.T. @ 69ma.	50	6.3V C.T. @ 2.5A	-	3.31	3.88	4.25	1/4-20
370CAXP	66	500V C.T. @ 81ma.	50	5V C.T. @ 2A	6.3V C.T. @ 2.5A	3.31	3.88	4.25	1/4-20
370DAXP	76	520V C.T. @ 104ma.	50	6.3V C.T. @ 3.5A	-	3.31	3.88	4.25	1/4-20
370DXP	86	550V C.T. @ 104ma.	50	5V C.T. @ 2A	6.3V C.T. @ 3A	3.31	3.88	4.25	1/4-20
370EXP	119	550V C.T. @ 144ma.	50	5V C.T. @ 3A	6.3V C.T. @ 4A	3.31	3.88	4.25	1/4-20
370FXP	141	550V C.T. @ 173ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	4.25	5.00	5.44	1/4-20
370HXP	180	550V C.T. @ 230ma.	50	5V C.T. @ 3A	6.3V C.T. @ 6A	4.25	5.00	5.44	1/4-20
372FXP	150	600V C.T. @ 173ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	4.25	5.00	5.44	1/4-20
372HXP	191	600V C.T. @ 230ma.	50	5V C.T. @ 3A	6.3V C.T. @ 6A	4.25	5.00	5.44	1/4-20

Part No.	VA	A.C. High Voltage Secondary R.M.S.	Bias Tap with High Voltage C.T.			Dimensions			Mounting Threaded Insert
			Grounded (VAC)	Filament #1 (VAC)	Filament #2 (VAC)	A	B	C	
372JXP	243	600V C.T. @ 288ma.	50	5V C.T. @ 4A	6.3V C.T. @ 8A	4.25	5.00	5.44	1/4-20
372XP	75	620V C.T. @ 81ma.	50	5V C.T. @ 2A	6.3V C.T. @ 2.4A	3.31	3.88	4.25	1/4-20
376XP	157	640V C.T. @ 173ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	4.25	5.00	5.44	1/4-20
373XP	125	700V C.T. @ 127ma.	50	5V C.T. @ 2A	6.3V C.T. @ 4A	3.31	3.88	4.25	1/4-20
374AXP	136	720V C.T. @ 138ma.	50	5V C.T. @ 3A	6.3V C.T. @ 3.5A	3.31	3.88	4.25	1/4-20
374XP	141	750V C.T. @ 127ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	4.25	5.00	5.44	1/4-20
374BXP	200	750V C.T. @ 201ma.	50	5V C.T. @ 3A	6.3V C.T. @ 6A	4.25	5.00	5.44	1/4-20
375XP	171	800V C.T. @ 155ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	4.25	5.00	5.44	1/4-20

*Data subject to change without notice*

© 2021. Hammond Manufacturing Ltd. All rights reserved.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Hammond](#) manufacturer:*

Other Similar products are found below :

[1-1672275-3](#) [A41-43-20A20](#) [DST5-120B39](#) [14A-56-36B42](#) [EN2997SE61808F8](#) [9-1611461-2](#) [29768](#) [1654308-1](#) [170R](#) [ST2-12B42](#) [ST3-12B5](#) [ST6118T-R](#) [PE-68421NL](#) [PL2.5-12-130B-C](#) [PoE4W3x5.0-R](#) [POE7W3X3.3-R](#) [4000-20C02K999](#) [4001-09W15AE777](#) [48RO-5000G-SIL](#) [TRA-0130-R](#) [XON7-15/2](#) [47045010](#) [1-1611760-0](#) [EN2997SE61808F9](#) [OPT110F-EAS00004AU](#) [XON25-9/24](#) [XON01349](#) [XON01200](#) [XDCA001/INER01](#) [PE-68414NL](#) [F-91X](#) [F-29U](#) [DST4-16B10](#) [P-8577](#) [T50-24M3](#) [1-1672277-2](#) [1-1672277-0](#) [1-1672275-5](#) [1-1672275-0](#) [PC-24-180B18](#) [750315125](#) [POE13W2VERS-R](#) [PA2380NL](#) [14A-10-12B9](#) [PE-68411NL](#) [DPC-28-160B50](#) [PA0803NL](#) [750315836](#) [20AMPS-CSTNLKIT](#) [PC-24-50 SIGNAL](#)