



Quality Products. Service Excellence.

## Current Transformer Indoor Toroidal CT Series

### Features



- Toroidal design.
- Supplied with 24" insulated secondary leads, terminated with crimped ring connectors.
- Suitable for use with bare (uninsulated) primary conductor in circuits up to 600 V (4 KV Hi pot); or at higher voltages when a suitably insulated conductor is used.
- All units have 5 A secondary for use with standard AC ammeters with 5 A movements.
- Two hole mounting bracket on all models.
- UL E227616 volume #1 file number X0DW2


### Application Data

#### To obtain current measurement:

1. Pass the wire carrying the current to be measured through the window of the CT transformer (acting as a primary winding).
2. Connect the CT secondary to an ammeter with a 5 A movement.

#### For higher accuracy or higher VA burden rating:

1. Choose a CT with a primary which is a multiple of the required primary rating and which has the accuracy or VA burden you require.
2. Loop the wire carrying the current to be measured through the window a number of times equal to the multiple. This "winding" will reduce the ratio back to required primary rating.
  - Example "A": To obtain an accuracy of 1.2% at 10VA burden with a ratio of 100:5, use a CT400 and loop 4 primary turns through the window.
  - Example "B": To obtain a 25:5 ratio, use a CT75 with 3 primary turns to yield 2% accuracy or a CT50 with 2 primary turns to yield 3.2% accuracy.

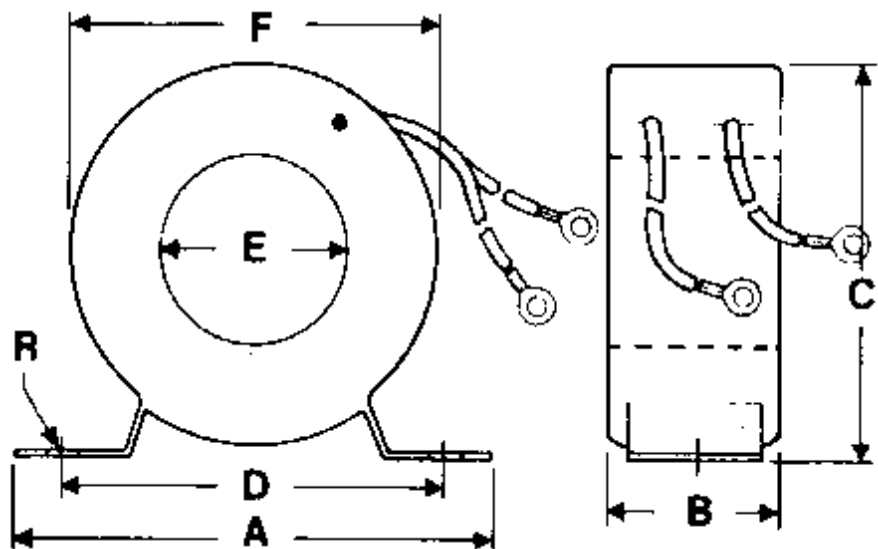

Part No.	Current Ratio	Accuracy	Burden	Overall Dimensions	Mounting Slots	Ship Wt.
----------	---------------	----------	--------	--------------------	----------------	----------

Part No.	Current Ratio	Accuracy	Burden	A	B	Overall Dimensions	E	F	Mounting Slots	ShlpWt.		
	Pri. / Sec.	%	VA	A	B	C	D	E	F	G	H	Lb.
CT50A	50:5	3.2	2	3.75	1.75	3.25	3.00	0.87	2.87	0.22	0.37	1.3
CT60A	60:5	2.4	2	3.75	1.75	3.25	3.00	0.87	2.87	0.22	0.37	1.4
CT75A	75:5	2	2	3.75	1.75	3.25	3.00	0.87	2.87	0.22	0.37	1.5
CT100A	100:5	2	2	3.75	1.75	3.25	3.00	1.20	2.87	0.22	0.37	1.1
CT150A	150:5	1.2	2	3.75	1.75	3.25	3.00	1.20	2.87	0.22	0.37	1.4
CT200A	200:5	1.2	2	4.75	1.75	4.25	4.00	2.20	3.87	0.22	0.37	1.7
CT250A	250:5	0.6 - 1.2	2 - 5	4.75	1.75	4.25	4.00	2.20	3.87	0.22	0.37	1.7
CT300A	300:5	0.6 - 1.2	2 - 10	4.75	1.75	4.25	4.00	2.20	3.87	0.22	0.37	1.8
CT400A	400:5	0.6 - 1.2	2 - 10	4.75	1.75	4.25	4.00	2.20	3.87	0.22	0.37	1.8
CT500A	500:5	0.3 - 1.2	2 - 20	4.75	1.75	4.25	4.00	2.20	3.87	0.22	0.37	1.8
CT600A	600:5	0.3 - 1.2	2 - 20	6.00	1.75	5.25	5.25	3.50	5.12	0.28	0.37	2.5
CT800A	800:5	0.3 - 1.2	5 - 50	6.00	1.75	5.25	5.25	3.50	5.12	0.28	0.37	2.8
CT1000A	1000:5	0.3 - 1.2	5 - 50	7.00	1.75	6.25	6.25	4.50	6.12	0.28	0.37	3.3
CT1200A	1200:5	0.3 - 1.2	10 - 50	8.00	1.75	7.75	7.25	5.50	7.12	0.28	0.37	3.8

Data subject to change without notice

© 2021. Hammond Manufacturing Ltd. All rights reserved.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Current Transformers](#) category:*

*Click to view products by [Hammond](#) manufacturer:*

Other Similar products are found below :

[MP3500](#) [BV UI 302 0156](#) [45029](#) [BV EI 302 2863](#) [BV EI 303 2809](#) [BV EI 303 3060](#) [BV EI 306 3604](#) [BV EI 422 1302](#) [BV EI 481 1295](#) [BV EI 481 1324](#) [BV EI 481 1325](#) [BV UI 301 0133](#) [BV UI 302 0144](#) [BV UI 304 0019](#) [BV UI 304 0129](#) [BV UI 304 0173](#) [TI-EF16-2X4V-4W](#)  
[SPCT62/40150/5AVA3CL1](#) [SPCT62/30100/5AVA1CL1](#) [SPCT62/3075/5AVA1CL3](#) [SPCT62/40150/5AVA1.5CL1](#)  
[SPCT62/40200/5AVA2.5CL0.5](#) [SPCT62/40300/5AVA3CL0.5](#) [CTD-KIT](#) [44013](#) [44017](#) [44021](#) [44024](#) [44098](#) [44101](#) [44134](#) [44140](#) [44171](#)  
[44174](#) [44176](#) [44178](#) [44180](#) [44248](#) [44250](#) [44251](#) [44278](#) [44339](#) [44340](#) [44373](#) [44375](#) [44376](#) [44378](#) [44379](#) [44436](#) [44678](#)