



har-bus®64 female connector



General information

| | | |
|--------------------------------|----------------------------------|----------------------------|
| Design | IEC 61076-4-113 | type: har-bus®64 female |
| No. of contacts | max. 160 | |
| Contact spacing | 2,54 mm | |
| Test voltage | 1000 V | |
| Contact resistance | max. 20 mOhm for rows a, b, c | max. 30 mOhm for rows z, d |
| Insulation resistance | min. 10 ¹⁰ Ohm | |
| Working current | 1 A@70°C (see derating diagram) | |
| Temperature range | -55°C ... +125°C | |
| Termination technology | crimp | |
| Clearance & creepage distance | min. 1,2 mm | |
| Insertion and withdrawal force | max. 160 N | |
| Mating cycles | - PL1 acc. to IEC 61076-4-113 => | 500 mating cycles |
| | - PL2 acc. to IEC 61076-4-113 => | 250 mating cycles |
| UL file | E102079 | |
| RoHS - compliant | Yes | |
| Leadfree | Yes | |

Insulator material

| | |
|------------------------------------|--|
| Material | PC (thermoplastics, glass fiber reinforcement 20%) |
| Colour | RAL 7032 (grey) |
| UL classification | UL 94-V0 |
| Material group acc. to IEC 60664-1 | IIIa (175 ≤ CTI < 400) |
| NFF classification | I2, F1 |

Contact material


| | |
|--------------------------|--------------|
| Contact material | Copper alloy |
| Plating termination zone | Ni |
| Plating contact zone | Au over Ni |

Derating diagram acc. to IEC 60512-5 (Current carrying capacity)

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals.

The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.
Control and test procedures according to DIN IEC 60512-5

With selective loading higher currents can be transmitted. The requirements according to VITA 1.7 are fulfilled.

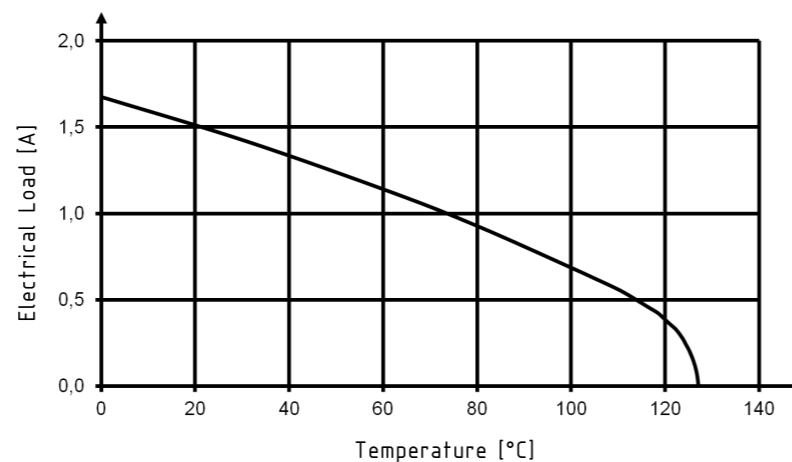

Installation of crimp contacts


Fitting the crimp contacts

After crimping the wires onto the contacts with the help of a crimping tool or an automatic crimping machine the contacts should be correctly oriented and inserted into the cavities of the connector moulding in the required configuration. They snap into position and are firmly held in place.

A light pull on the wire assures the correct tensile strength of the contact. When using stranded wires with a gauge below 0.37 mm² an insertion tool is necessary.

Removing the crimp contacts

The removal tool is inserted into a slot on the side of the respective crimp cavity. This action compresses the contact retaining spring therefore the contact can then be easily withdrawn using a light pull on the wire. This action will cause no damage to the contact/wire which can be repositioned/refitted as necessary. The drawing demonstrates the crimp removal procedure (max. 5x).

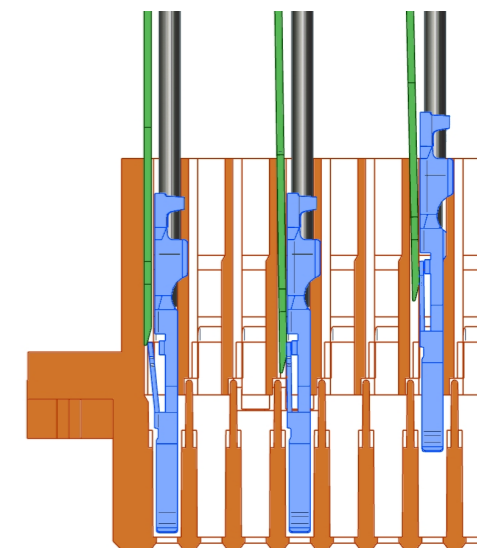

| | | | | | | |
|---|-----------------------|-----------------------------------|--------------------|---|-----------------|---------------------|
| | All rights reserved | Created by TADJE | Inspected by ZWAHR | Standardisation HOFFMANN | Date 2014-08-04 | State Final Release |
| | Department EC PD - DE | Title har-bus®64 female connector | | Doc-Key / ECM-Nr. 100580995/UGD/000/B 50000078482 | | |
| HARTING Electronics GmbH D-32339 Espelkamp | | Type DS | Number 02052100801 | | Rev. B | Page 1/1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN 41612 Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[004.767](#) [608489050008049](#) [691327-1](#) [74670-0732](#) [74680-0340](#) [75880-0015](#) [76453-0014](#) [86093159ALF](#) [9732967801](#) [QLC260R](#)
[120X10019X](#) [120X10089X](#) [122A10249X](#) [122A10669X](#) [122A11089X](#) [122A13089X](#) [122A10089X](#) [122A10129X](#) [122A10349X](#)
[122A13359X](#) [1377391-4](#) [DIN-048CPC-SR1-MH](#) [1393583-2](#) [1393726-7](#) [140X10129X](#) [143-1913-000](#) [143-1908-000](#) [1484472-1](#) [2110070-1](#)
[2110070-2](#) [CBC20T00-008FDS5-0-1-002VR](#) [172699-5036](#) [2-1393557-4](#) [2-1437084-2](#) [CTJ720E01B-6141](#) [394506](#) [419-2080-402](#)
[V42254B2202C968](#) [419-2086-201](#) [419-2087-002](#) [448657-1](#) [448847-3](#) [5-1393755-9](#) [02990000004](#) [054302](#) [043556](#) [09062483201750](#)
[0850033067](#) [09031646555](#) [09061486901840](#)