



**Emergency  
Lighting  
Products**

## PRODUCT DESCRIPTION

The Hatch **ELP12-UNV-K** LED Emergency Driver allows an LED lighting fixture to be used for normal and emergency operation. In the event of a power failure, the **ELP12-UNV-K** switches to emergency mode and operates the existing fixture for a minimum of 90 minutes. All of the LED Emergency Drivers in the Hatch line include a test switch with integrated charge indicator and are UL Listed for field or factory installation.

## BENEFITS

- UL Listed for field and factory installation
- For use with emergency only fixtures as well as new and existing fixtures

## FEATURES

- UL 924 LISTED for US and Canada
- Class 2 Compliant
- UL Listed for field and factory installation
- Separate NiCad battery
- Includes test switch and integrated charge indicator
- For use with switched or unswitched fixtures
- 5-Year Warranty
- Suitable for damp locations
- Includes installation guide and luminaire modification label
- For use with surface mounts or recessed type IC or non-IC products listed to UL standards

## 12W CONSTANT POWER LED EMERGENCY DRIVER ELP12-UNV-K



## APPROVALS / CERTIFICATIONS




## SPECIFICATIONS


|                     |  |
|---------------------|--|
| Input Voltage       | 120-277VAC, 50/60Hz  |
| Output Voltage      | 12-39 VDC Class 2  |
| Output Current      | 930mA @ 12Vdc<br>300mA @ 36~41Vdc                          |
| Output Power        | 10.6W @25°C  |
| Power Factor        | >0.5 under 120~277Vac Input                                |
| Emergency Operation | 90 Minutes   |
| Recharge Time       | 24 hours   |
| Operating Temp.     | 0 to 55°C  |
| Max Case Temp.      | 75°C   |
| Case Material       | Metal  |
| Battery             | High Temp NiCad 9.6Vdc                                     |
| Charging Current    | 150mA  |
| EMI                 | FCC, 47CFR Part 15   |
| Protections         | Over Voltage, Over Current,<br>Short Circuit, Open Circuit |

Product specifications are subject to change without notice.

## PHYSICAL DIMENSIONS - ELP12-UNV-K

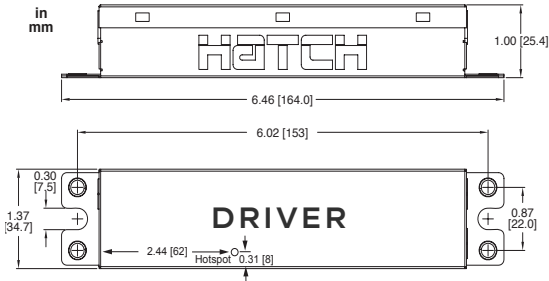


|               |            |                 |              |
|---------------|------------|-----------------|--------------|
| <b>Length</b> | 6.46 [164] | <b>Width</b>    | 1.37 [34.7]  |
| <b>Height</b> | 1.00 [25]  | <b>Mounting</b> | 6.00 [152.4] |

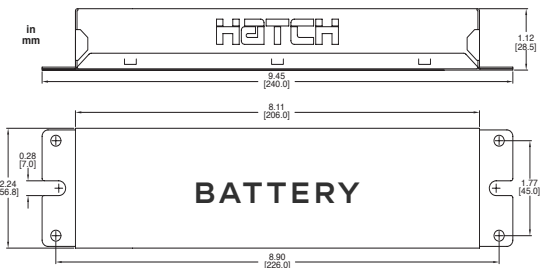

|               |              |                 |             |
|---------------|--------------|-----------------|-------------|
| <b>Length</b> | 9.45 [240]   | <b>Width</b>    | 2.24 [56.8] |
| <b>Height</b> | 1.12 [28.50] | <b>Mounting</b> | 8.90 [226]  |

## WIRING DIAGRAM

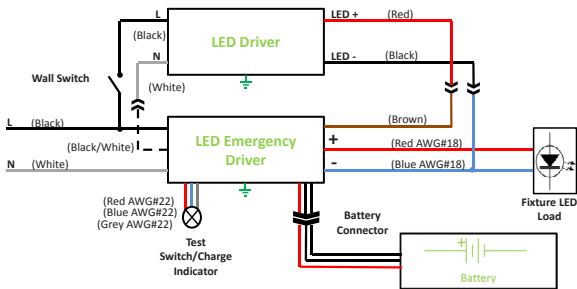

For additional wiring diagrams please visit <https://www.hatchlighting.com/elp-alternate-wiring-diagrams>


## WIRING INFORMATION

|                                |   |
|--------------------------------|---|
| <b>Input</b>                   | 12", Black(L), White (N), #18AWG                  |
| <b>Output</b>                  | 24", Red(+), Blue (-) #18AWG<br>24" Brown, #20AWG |
| <b>Battery Connection</b>      | 24", Red, Black #18AWG                            |
| <b>Test Switch Connections</b> | 24", Red, Blue, Grey #22 AWG                      |

## PACKAGING INFORMATION


|                       |              |                    |   |
|-----------------------|--------------|--------------------|---|
| <b>Package Weight</b> | 1.87 lbs     |                    |   |
| <b>Quantity</b>       | 15 pc/carton |                    |   |
| <b>INCLUDES</b>       |              |                    |   |
| LED Emergency Driver  | 1            | NiCad Battery      | 1 |
| Wall Plate            | 1            | Tek Screws         | 6 |
| Luminaire Mod. Label  | 1            | Test Button        | 1 |
| Screw Wire Connectors | 3            | Installation Guide | 1 |
| Wall Plate Screws     | 2            |                    |   |

## OPTIONAL LED MODULE

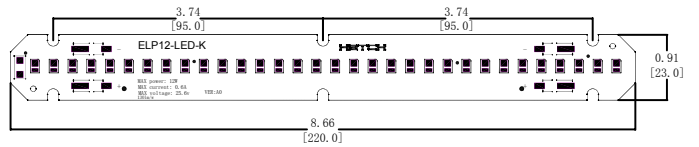

| Part #      | Max. Power | Max. Current | Typ. Voltage | Lumens/Watt | CRI |
|-------------|------------|--------------|--------------|-------------|-----|
| ELP12-LED-K | 12         | 600mA        | 24V          | ~130        | >80 |

## TEST SWITCH



Tolerance:

|        |       |
|--------|-------|
| > 6-30 | ±0.40 |
| > 0-6  | ±0.25 |

Recommended hole size for installation:  $\varnothing 12\text{mm}$

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Hatch Lighting](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#)