

POSITIVE VOLTAGE REGULATORS

DESCRIPTION

The LM78Lxx series of three-terminal positive regulators employ internal current limiting and thermal shutdown, making them essentially indestructible. If adequate heat-sink is provided, they can deliver up to 100 mA output current. They are intended as fixed voltage regulators in a wide range of applications including local or on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power pass elements to make high-current voltage regulators. The LM78Lxx series used as Zener diode/resistor combination replacement, offers an effective output impedance improvement of typically twoorders of magnitude, along with lower quiescent current and lower noise.

FEATURES

- Output current up to 100 mA
- Output voltages of 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V, 20V, 24V, 33V.
- Thermal overload protection
- Short circuit protection
- No external components are required
- Available either $\pm 5\%$




ORDERING INFORMATION


DEVICE	Package Type	MARKING	Packing	Packing Qty
LM78L05MK/TR	SOT-89	78L05	REEL	1000pcs/reel
LM78L06MK/TR		78L06	REEL	1000pcs/reel
LM78L08MK/TR		78L08	REEL	1000pcs/reel
LM78L09MK/TR		78L09	REEL	1000pcs/reel
LM78L10MK/TR		78L10	REEL	1000pcs/reel
LM78L12MK/TR		78L12	REEL	1000pcs/reel
LM78L15MK/TR		78L15	REEL	1000pcs/reel
LM78L18MK/TR		78L18	REEL	1000pcs/reel
LM78L20MK/TR		78L20	REEL	1000pcs/reel
LM78L24MK/TR		78L24	REEL	1000pcs/reel
LM78L33MK/TR		78L33	REEL	1000pcs/reel

LM78L05Z	TO-92	78L05	BAG	1000pcs/bag
LM78L06Z		78L06	BAG	1000pcs/bag
LM78L08Z		78L08	BAG	1000pcs/bag
LM78L09Z		78L09	BAG	1000pcs/bag
LM78L10Z		78L10	BAG	1000pcs/bag
LM78L12Z		78L12	BAG	1000pcs/bag
LM78L15Z		78L15	BAG	1000pcs/bag
LM78L18Z		78L18	BAG	1000pcs/bag
LM78L20Z		78L20	BAG	1000pcs/bag
LM78L24Z		78L24	BAG	1000pcs/bag
LM78L33Z		78L33	BAG	1000pcs/bag
LM78L05M/TR	SOP-8	78L05	REEL	2500pcs/reel
LM78L06M/TR		78L06	REEL	2500pcs/reel
LM78L08M/TR		78L08	REEL	2500pcs/reel
LM78L09M/TR		78L09	REEL	2500pcs/reel
LM78L10M/TR		78L10	REEL	2500pcs/reel
LM78L12M/TR		78L12	REEL	2500pcs/reel
LM78L15M/TR		78L15	REEL	2500pcs/reel
LM78L18M/TR		78L18	REEL	2500pcs/reel
LM78L20M/TR		78L20	REEL	2500pcs/reel
LM78L24M/TR		78L24	REEL	2500pcs/reel
LM78L33M/TR		78L33	REEL	2500pcs/reel
LM78L05M3/TR	SOT-23-3	78L05	REEL	3000pcs/reel
LM78L06M3/TR		78L06	REEL	3000pcs/reel
LM78L08M3/TR		78L08	REEL	3000pcs/reel
LM78L09M3/TR		78L09	REEL	3000pcs/reel
LM78L10M3/TR		78L10	REEL	3000pcs/reel
LM78L12M3/TR		78L12	REEL	3000pcs/reel
LM78L15M3/TR		78L15	REEL	3000pcs/reel
LM78L18M3/TR		78L18	REEL	3000pcs/reel
LM78L20M3/TR		78L20	REEL	3000pcs/reel
LM78L24M3/TR		78L24	REEL	3000pcs/reel
LM78L33M3/TR		78L33	REEL	3000pcs/reel


CONNECTION DIAGRAM (top view)




SOT-89-3



TO-92



SOT-23-3



SOP-8

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter ²	Value	Unit
V _I	DC Input Voltage	V _O = 5 to 10 V	V
		V _O = 12 to 15 V	
		V _O = 18 to 33 V	
I _O	Output Current	100	mA
P _{tot}	Power Dissipation	Internally Limited (*)	
T _L	Lead Temperature (Soldering, 10 seconds)	245	°C
T _{stg}	Storage Temperature Range	-40 to 150	°C
T _{op}	Operating Junction TemperatureRange	0 to 70	°C

Note: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

ELECTRICAL CHARACTERISTICS OF LM78L05

refer to the test circuits, $V_I = 10V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	4.8	5	5.2	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA}$ $V_I = 7 \text{ to } 20 \text{ V}$	4.75		5.25	V
		$I_O = 1 \text{ to } 70 \text{ mA}$ $V_I = 10 \text{ V}$	4.75		5.25	
V_O	Line Regulation	$V_I = 7 \text{ to } 20 \text{ V}$ $T_J = 25^\circ\text{C}$			150	mV
		$V_I = 8 \text{ to } 20 \text{ V}$ $T_J = 25^\circ\text{C}$			100	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA}$ $T_J = 25^\circ\text{C}$			60	mV
		$I_O = 1 \text{ to } 40 \text{ mA}$ $T_J = 25^\circ\text{C}$			30	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6	mA
		$T_J = 125^\circ\text{C}$			5.5	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 8 \text{ to } 20 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz}$ $T_J = 25^\circ\text{C}$		40		V
SVR	Supply Voltage Rejection	$V_I = 8 \text{ to } 18 \text{ V}$ $f = 120\text{Hz}$ $I_O = 40 \text{ mA}$ $T_J = 25^\circ\text{C}$	41	49		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L06

refer to the test circuits, $V_I = 12V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	5.76	6	6.24	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA}$ $V_I = 8.5 \text{ to } 20 \text{ V}$	5.7		6.3	V
		$I_O = 1 \text{ to } 70 \text{ mA}$ $V_I = 12 \text{ V}$	5.7		6.3	
V_O	Line Regulation	$V_I = 8.5 \text{ to } 20 \text{ V}$ $T_J = 25^\circ\text{C}$			150	mV
		$V_I = 9 \text{ to } 20 \text{ V}$ $T_J = 25^\circ\text{C}$			100	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA}$ $T_J = 25^\circ\text{C}$			60	mV
		$I_O = 1 \text{ to } 40 \text{ mA}$ $T_J = 25^\circ\text{C}$			30	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6	mA
		$T_J = 125^\circ\text{C}$			5.5	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 9 \text{ to } 20 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz}$ $T_J = 25^\circ\text{C}$		50		V
SVR	Supply Voltage Rejection	$V_I = 9 \text{ to } 20 \text{ V}$ $f = 120\text{Hz}$ $I_O = 40 \text{ mA}$ $T_J = 25^\circ\text{C}$	39	46		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L08

refer to the test circuits, $V_I = 14V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	7.68	8	8.32	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA} \quad V_I = 10.5 \text{ to } 23 \text{ V}$	7.6		8.4	V
		$I_O = 1 \text{ to } 70 \text{ mA} \quad V_I = 14 \text{ V}$	7.6		8.4	
V_O	Line Regulation	$V_I = 10.5 \text{ to } 23 \text{ V} \quad T_J = 25^\circ\text{C}$			175	mV
		$V_I = 11 \text{ to } 23 \text{ V} \quad T_J = 25^\circ\text{C}$			125	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA} \quad T_J = 25^\circ\text{C}$			80	mV
		$I_O = 1 \text{ to } 40 \text{ mA} \quad T_J = 25^\circ\text{C}$			40	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6	mA
		$T_J = 125^\circ\text{C}$			5.5	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 11 \text{ to } 23 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz} \quad T_J = 25^\circ\text{C}$		60		V
SVR	Supply Voltage Rejection	$V_I = 12 \text{ to } 23 \text{ V} \quad f = 120\text{Hz}$ $I_O = 40 \text{ mA} \quad T_J = 25^\circ\text{C}$	37	45		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L09

refer to the test circuits, $V_I = 15V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	8.64	9	9.36	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA} \quad V_I = 11.5 \text{ to } 23 \text{ V}$	8.55		9.45	V
		$I_O = 1 \text{ to } 70 \text{ mA} \quad V_I = 15 \text{ V}$	8.55		9.45	
V_O	Line Regulation	$V_I = 11.5 \text{ to } 23 \text{ V} \quad T_J = 25^\circ\text{C}$			225	mV
		$V_I = 12 \text{ to } 23 \text{ V} \quad T_J = 25^\circ\text{C}$			150	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA} \quad T_J = 25^\circ\text{C}$			80	mV
		$I_O = 1 \text{ to } 40 \text{ mA} \quad T_J = 25^\circ\text{C}$			40	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6	mA
		$T_J = 125^\circ\text{C}$			5.5	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 12 \text{ to } 23 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz} \quad T_J = 25^\circ\text{C}$		70		V
SVR	Supply Voltage Rejection	$V_I = 12 \text{ to } 23 \text{ V} \quad f = 120\text{Hz}$ $I_O = 40 \text{ mA} \quad T_J = 25^\circ\text{C}$	37	44		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L10

refer to the test circuits, $V_I = 16V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	9.6	10	10.4	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA} \quad V_I = 12.5 \text{ to } 23 \text{ V}$	9.5		10.5	V
		$I_O = 1 \text{ to } 70 \text{ mA} \quad V_I = 16 \text{ V}$	9.5		10.5	
V_O	Line Regulation	$V_I = 12.5 \text{ to } 23 \text{ V} \quad T_J = 25^\circ\text{C}$			230	mV
		$V_I = 13 \text{ to } 23 \text{ V} \quad T_J = 25^\circ\text{C}$			170	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA} \quad T_J = 25^\circ\text{C}$			80	mV
		$I_O = 1 \text{ to } 40 \text{ mA} \quad T_J = 25^\circ\text{C}$			40	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6	mA
		$T_J = 125^\circ\text{C}$			5.5	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 13 \text{ to } 23 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz} \quad T_J = 25^\circ\text{C}$		60		V
SVR	Supply Voltage Rejection	$V_I = 14 \text{ to } 23 \text{ V} \quad f = 120\text{Hz}$ $I_O = 40 \text{ mA} \quad T_J = 25^\circ\text{C}$	37	45		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L12

refer to the test circuits, $V_I = 19V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	11.5	12	12.5	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA} \quad V_I = 14.5 \text{ to } 27 \text{ V}$	11.4		12.6	V
		$I_O = 1 \text{ to } 70 \text{ mA} \quad V_I = 19 \text{ V}$	11.4		12.6	
V_O	Line Regulation	$V_I = 14.5 \text{ to } 27 \text{ V} \quad T_J = 25^\circ\text{C}$			250	mV
		$V_I = 16 \text{ to } 27 \text{ V} \quad T_J = 25^\circ\text{C}$			200	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA} \quad T_J = 25^\circ\text{C}$			100	mV
		$I_O = 1 \text{ to } 40 \text{ mA} \quad T_J = 25^\circ\text{C}$			50	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6.5	mA
		$T_J = 125^\circ\text{C}$			6	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 16 \text{ to } 27 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz} \quad T_J = 25^\circ\text{C}$		80		V
SVR	Supply Voltage Rejection	$V_I = 15 \text{ to } 25 \text{ V} \quad f = 120\text{Hz}$ $I_O = 40 \text{ mA} \quad T_J = 25^\circ\text{C}$	37	42		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L15

refer to the test circuits, $V_I = 19V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	14.4	15	15.6	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA} \quad V_I = 17.5 \text{ to } 30 \text{ V}$	14.25		15.75	V
		$I_O = 1 \text{ to } 70 \text{ mA} \quad V_I = 23 \text{ V}$	14.25		15.75	
V_O	Line Regulation	$V_I = 17.5 \text{ to } 30 \text{ V} \quad T_J = 25^\circ\text{C}$			300	mV
		$V_I = 20 \text{ to } 30 \text{ V} \quad T_J = 25^\circ\text{C}$			250	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA} \quad T_J = 25^\circ\text{C}$			150	mV
		$I_O = 1 \text{ to } 40 \text{ mA} \quad T_J = 25^\circ\text{C}$			75	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6.5	mA
		$T_J = 125^\circ\text{C}$			6	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 20 \text{ to } 30 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz} \quad T_J = 25^\circ\text{C}$		90		V
SVR	Supply Voltage Rejection	$V_I = 18.5 \text{ to } 28.5 \text{ V} \quad f = 120\text{Hz}$ $I_O = 40 \text{ mA} \quad T_J = 25^\circ\text{C}$	34	39		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L18

refer to the test circuits, $V_I = 27V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	17.3	18	18.7	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA} \quad V_I = 22 \text{ to } 33 \text{ V}$	17.1		18.9	V
		$I_O = 1 \text{ to } 70 \text{ mA} \quad V_I = 27 \text{ V}$	17.1		18.9	
V_O	Line Regulation	$V_I = 21 \text{ to } 33 \text{ V} \quad T_J = 25^\circ\text{C}$			320	mV
		$V_I = 22 \text{ to } 33 \text{ V} \quad T_J = 25^\circ\text{C}$			270	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA} \quad T_J = 25^\circ\text{C}$			170	mV
		$I_O = 1 \text{ to } 40 \text{ mA} \quad T_J = 25^\circ\text{C}$			85	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6.5	mA
		$T_J = 125^\circ\text{C}$			6	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 23 \text{ to } 33 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz} \quad T_J = 25^\circ\text{C}$		120		V
SVR	Supply Voltage Rejection	$V_I = 23 \text{ to } 33 \text{ V} \quad f = 120\text{Hz}$ $I_O = 40 \text{ mA} \quad T_J = 25^\circ\text{C}$	33	38		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L20

refer to the test circuits, $V_I = 29V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	19.2	20	20.8	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA} \quad V_I = 24 \text{ to } 33V$	19		21	V
		$I_O = 1 \text{ to } 70 \text{ mA} \quad V_I = 29V$	19		21	
V_O	Line Regulation	$V_I = 22.5 \text{ to } 34 \text{ V} \quad T_J = 25^\circ\text{C}$			330	mV
		$V_I = 24 \text{ to } 34 \text{ V} \quad T_J = 25^\circ\text{C}$			280	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA} \quad T_J = 25^\circ\text{C}$			180	mV
		$I_O = 1 \text{ to } 40 \text{ mA} \quad T_J = 25^\circ\text{C}$			90	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6.5	mA
		$T_J = 125^\circ\text{C}$			6	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 25 \text{ to } 33 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz} \quad T_J = 25^\circ\text{C}$		120		V
SVR	Supply Voltage Rejection	$V_I = 25 \text{ to } 35 \text{ V} \quad f = 120\text{Hz}$ $I_O = 40 \text{ mA} \quad T_J = 25^\circ\text{C}$	32	38		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L24

refer to the test circuits, $V_I = 27V$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	23	24	25	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA} \quad V_I = 27 \text{ to } 38V$	22.8		25.2	V
		$I_O = 1 \text{ to } 70 \text{ mA} \quad V_I = 33 \text{ V}$	22.8		25.2	
V_O	Line Regulation	$V_I = 27 \text{ to } 38 \text{ V} \quad T_J = 25^\circ\text{C}$			350	mV
		$V_I = 28 \text{ to } 38 \text{ V} \quad T_J = 25^\circ\text{C}$			300	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA} \quad T_J = 25^\circ\text{C}$			200	mV
		$I_O = 1 \text{ to } 40 \text{ mA} \quad T_J = 25^\circ\text{C}$			100	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6.5	mA
		$T_J = 125^\circ\text{C}$			6	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 28 \text{ to } 38 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz to } 100\text{KHz} \quad T_J = 25^\circ\text{C}$		200		V
SVR	Supply Voltage Rejection	$V_I = 23 \text{ to } 33 \text{ V} \quad f = 120\text{Hz}$ $I_O = 40 \text{ mA} \quad T_J = 25^\circ\text{C}$	31	37		dB
V_d	Dropout Voltage			1.7		V

ELECTRICAL CHARACTERISTICS OF LM78L33

refer to the test circuits, $V_I = 3.6 \text{ V}$, $I_O = 40 \text{ mA}$, $C_I = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$,

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$T_J = 25^\circ\text{C}$	31.68	33	34.32	V
V_O	Output Voltage	$I_O = 1 \text{ to } 40 \text{ mA}$ $V_I = 36 \text{ to } 40 \text{ V}$	31.35		34.65	V
		$I_O = 1 \text{ to } 70 \text{ mA}$ $V_I = 38 \text{ V}$	31.35		34.65	
V_O	Line Regulation	$V_I = 36 \text{ to } 40 \text{ V}$ $T_J = 25^\circ\text{C}$			150	mV
		$V_I = 37 \text{ to } 40 \text{ V}$ $T_J = 25^\circ\text{C}$			100	
V_O	Load Regulation	$I_O = 1 \text{ to } 100 \text{ mA}$ $T_J = 25^\circ\text{C}$			60	mV
		$I_O = 1 \text{ to } 40 \text{ mA}$ $T_J = 25^\circ\text{C}$			30	
I_d	Quiescent Current	$T_J = 25^\circ\text{C}$			6	mA
		$T_J = 125^\circ\text{C}$			5.5	mA
I_d	Quiescent Current Change	$I_O = 1 \text{ to } 40 \text{ mA}$			0.1	mA
		$V_I = 36 \text{ to } 40 \text{ V}$			1.5	
e_N	Output Noise Voltage	$B = 10\text{Hz} \text{ to } 100\text{KHz}$ $T_J = 25^\circ\text{C}$		120		V
SVR	Supply Voltage Rejection	$V_I = 36 \text{ to } 40 \text{ V}$ $f = 120\text{Hz}$ $I_O = 40 \text{ mA}$ $T_J = 25^\circ\text{C}$	41	49		dB
V_d	Dropout Voltage			1.7		V

Figure 1 : 78L05/12 Output Voltage vs Ambient Temperature






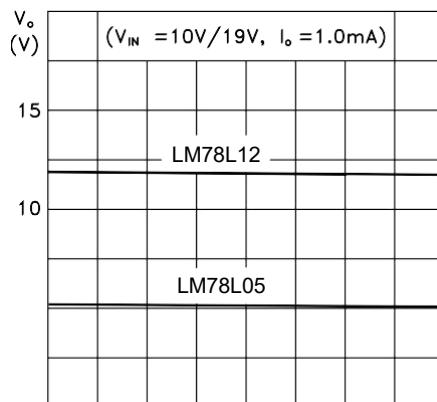



Figure 2: 78L05/12 Quiescent Current vs Output Current

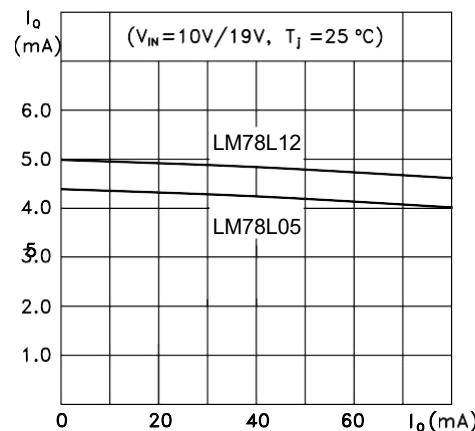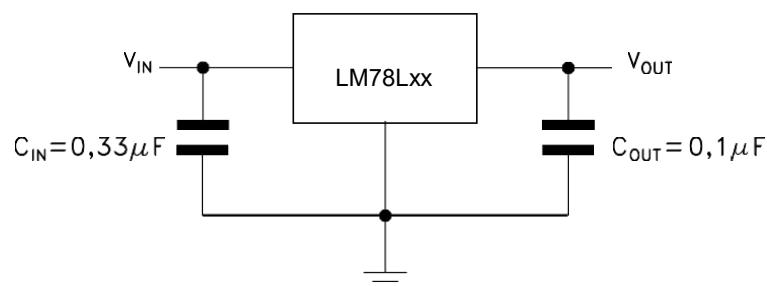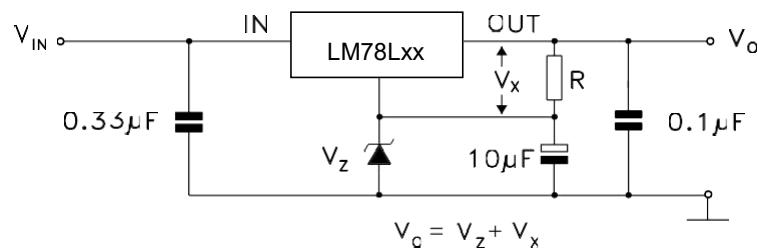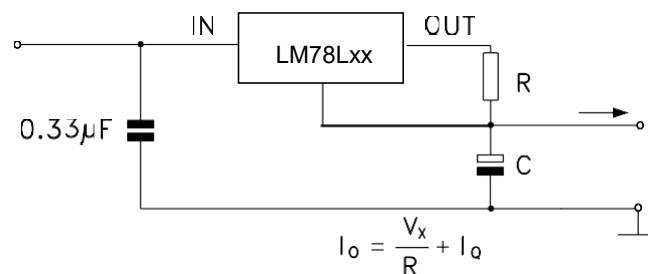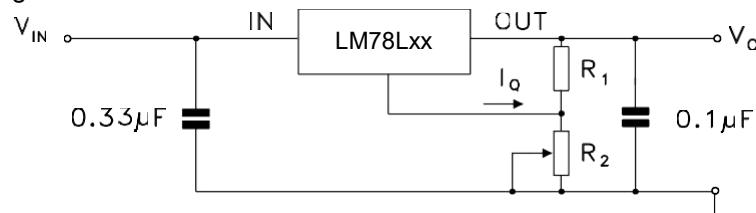

TEST CIRCUITS

Edit Boost Circuit

Current Regulator

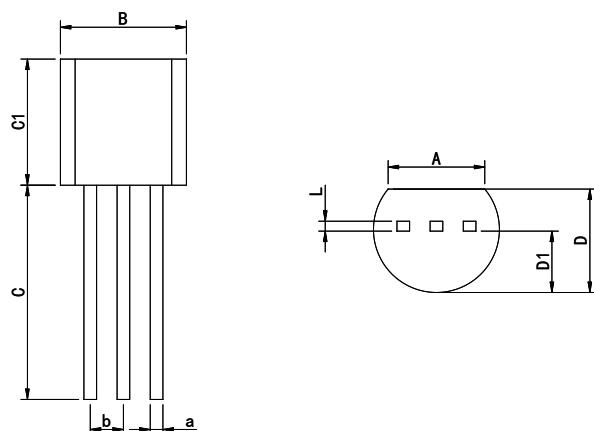Adjustable Output Regulator


PHYSICAL DIMENSIONS


TO-92



Dimensions In Millimeters(TO-92)

Symbol:	A	B	C	C1	D	D1	L	a	b
Min:	3.43	4.44	13.5	4.32	3.17	2.03	0.33	0.40	1.27BSC
Max:	3.83	5.21	15.3	5.34	4.19	2.67	0.42	0.52	

SOT-89-3

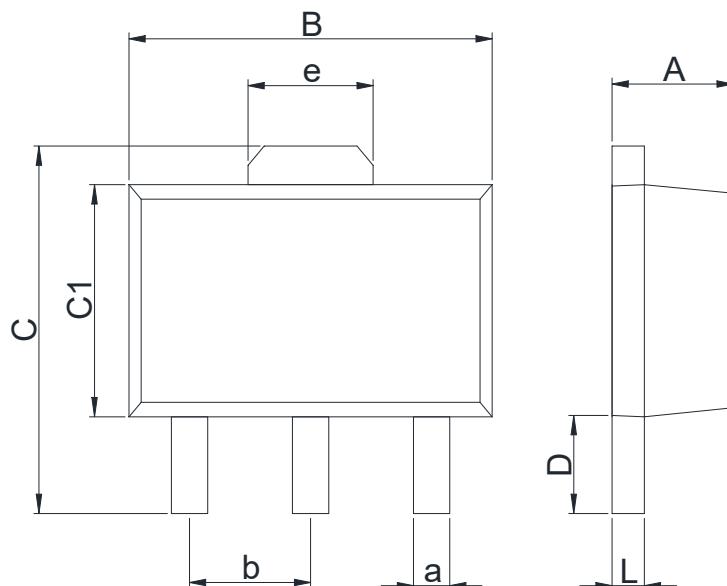


Dimensions In Millimeters(SOT-89-3)

Symbol:	A	B	C	C1	D	L	a	b	e
Min:	1.40	4.40	3.94	2.30	0.90	0.35	0.40	1.50	1.55
Max:	1.60	4.60	4.25	2.60	1.20	0.44	0.50	BSC	BSC

PHYSICAL DIMENSIONS


SOP-8

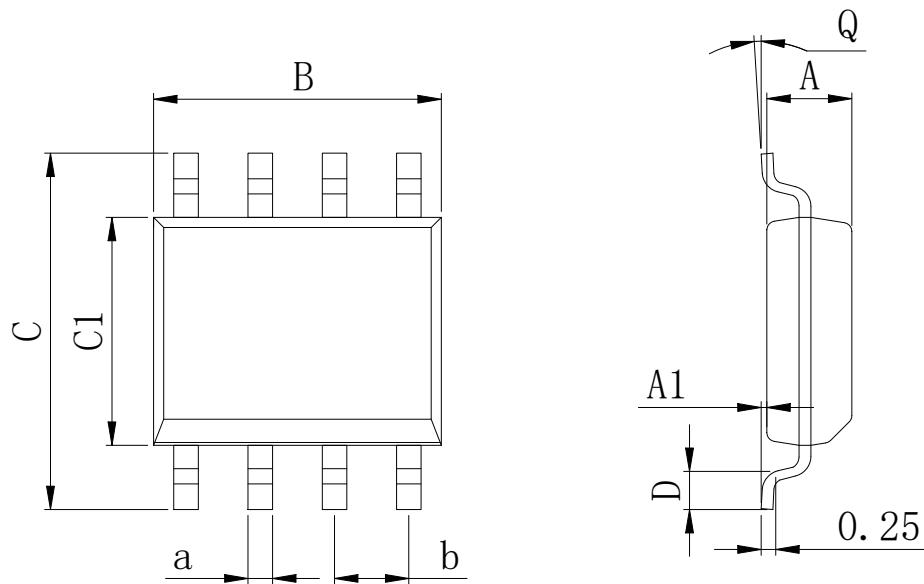

Dimensions In Millimeters(SOP-8)

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	

SOT-23-3

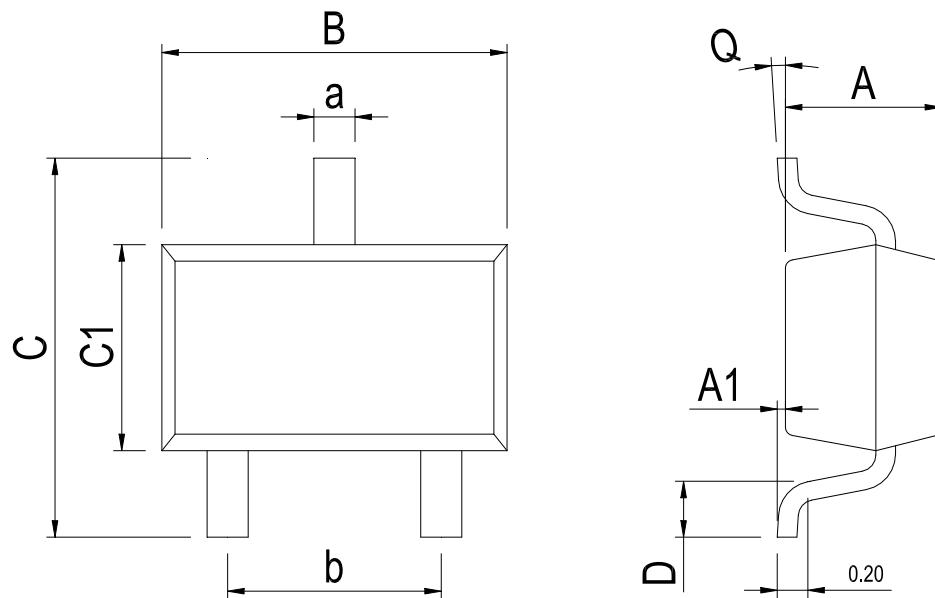

Dimensions In Millimeters(SOT-23-3)

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.05	0.00	2.82	2.65	1.50	0.30	0°	0.30	1.90 BSC
Max:	1.15	0.15	3.02	2.95	1.70	0.60	8°	0.40	

REVISION HISTORY

DATE	REVISION	PAGE
2018-8-9	New	1-14
2023-9-13	Modify the package dimension diagram SOT89-3、Update encapsulation type、Add annotation for Maximum Ratings.	1、3、11
2024-1-5	Update TO-92 Physical Dimensions	11

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Huaguan Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Huaguan Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: Select the appropriate Huaguan Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Huaguan Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Huaguan Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Huaguan Semiconductor, and the user shall not claim any compensation liability against Huaguan Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Huaguan Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Huaguan Semiconductor. Not all parameters of each device need to be tested.

The documentation of Huaguan Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Huaguan Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Huaguan Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Huaguan Semiconductor accepts no liability for any loss or damage caused by infringement.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [HGSEMI](#) manufacturer:

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#) [HLP2985AIM5X-5.0](#) [HLP2992AIM5X-5.0/NOPB](#) [HMIC5205-5.0YM5-TR](#)