

# BAT54ADW THRU BAT54JW

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

## SOT-363 Surface Mount Schottky Barrier Rectifier

### ● Features

- $V_R$  30V
- $I_{F(AV)}$  0.2A
- For use in low voltage, high frequency inverters
- Free wheeling, and polarity protection applications

### ● Applications

For use in low voltage high frequency circuit signals.


### ● Mechanical Data

- Case: SOT-363  
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

### ● Function Diagram









Reverse Voltage  
30V  
Forward Current  
0.2 Ampere

SOT-363



Marking:

BAT54ADW:KL6    BAT54TW:KLA  
BAT54BRW:KLB    BAT54DW:KLD  
BAT54CDW:KL7    BAT54JW:KLC  
BAT54SDW:KL8



### ● Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Maximum repetitive peak reverse voltage	$V_{RRM}$	V	30
Maximum RMS Voltage	$V_{RMS}$	V	21
Maximum DC blocking voltage	$V_{DC}$	V	30
Maximum Average Forward Rectified Current	$I_{F(AV)}$	A	0.2
Non-repetitive Peak Forward Surge Current @t=8.3ms Half-sine wave	$I_{FSM}$	A	0.6
Power Dissipation	$P_d$	mW	200
Storage temperature	$T_{stg}$	°C	-55~+125
Junction temperature	$T_j$	°C	-55 ~+150
Typical Thermal Resistance	$R_{\theta J-A}$	°C /W	500





# BAT54ADW THRU BAT54JW

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

## ● Electrical Characteristics (Ta=25°C Unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	Min	Type	Max
Maximum forward voltage	$I_F=1\text{mA}$	$V_F$	V	—	—	0.32
	$I_F=10\text{mA}$			—	—	0.4
	$I_F=30\text{mA}$			—	—	0.5
	$I_F=100\text{mA}$			—	—	1.0
Maximum reverse current	$V_R=25\text{V}$	$I_R$	$\mu\text{A}$	—	—	2.0
Capacitance between terminals	$V_R=1.0\text{V}, f=1.0\text{MHz}$	$C_T$	pF	—	—	10
Reverse recovery time	$I_F=I_R=10\text{mA}, I_{rr}=0.1 \times I_R$ $R_L=100\Omega$	$t_{rr}$	nS	—	—	5
Reverse breakdown voltage	$I_R=100\mu\text{A}$	$V_R$	V	30	—	—

## ● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

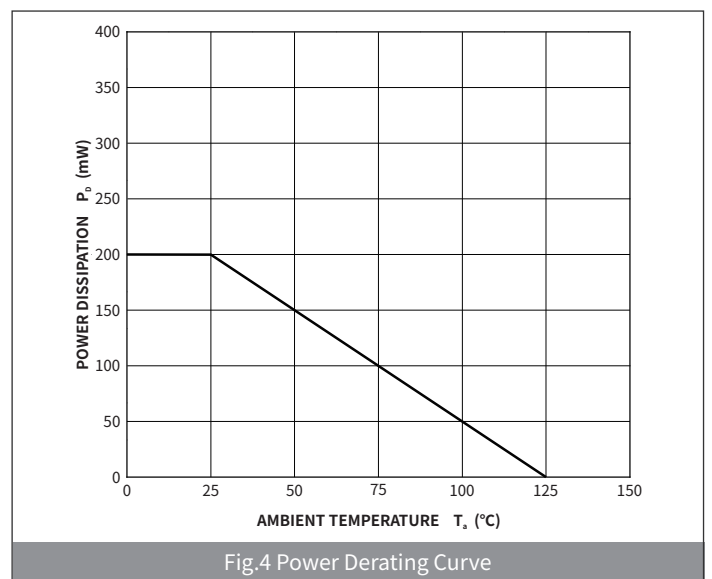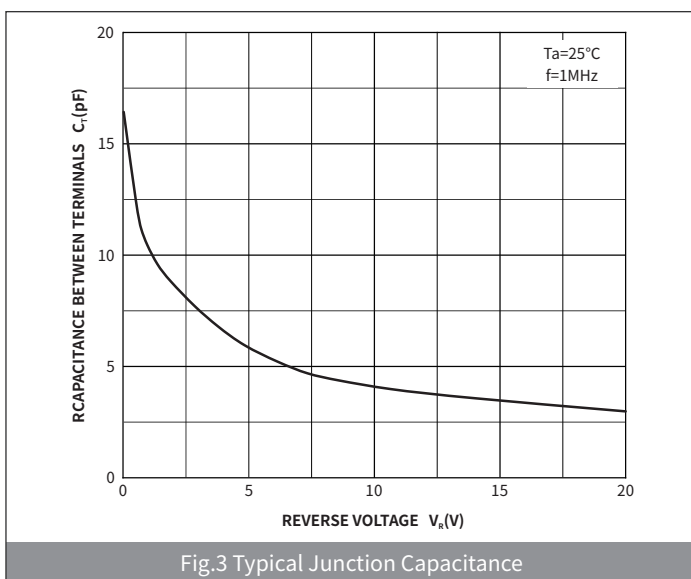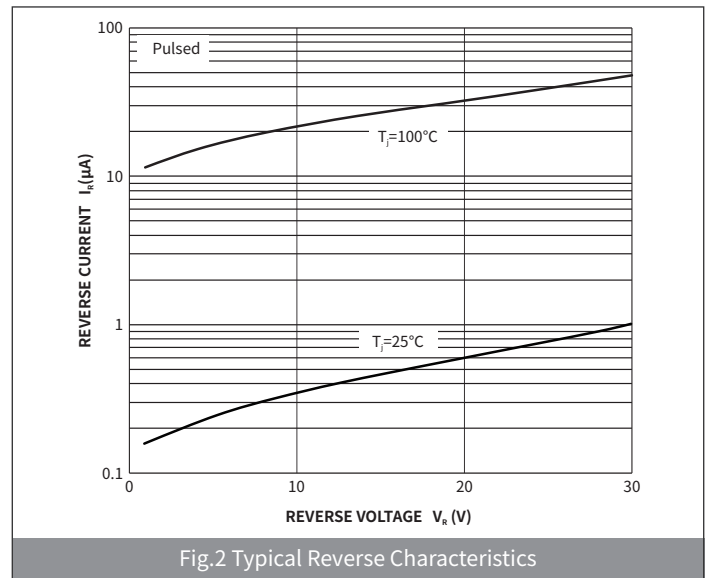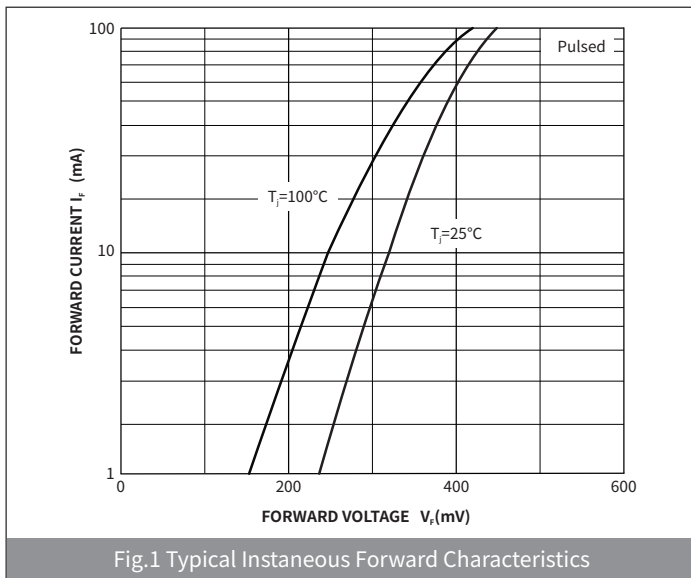

# BAT54ADW THRU BAT54JW

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

## ● Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-363	R1	0.0068	3000	45000	180000	7"

## ● Package Outline Dimensions (SOT-363)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.09	1.10	0.035	0.043
A1	-	0.10	-	0.004
A2	0.90	1.00	0.035	0.039
b	0.15	0.35	0.006	0.014
c	0.10	0.15	0.004	0.006
D	2.00	2.20	0.079	0.087
E	1.15	1.35	0.045	0.053
E1	2.15	2.40	0.085	0.094
e	0.650TYP		0.026TYP	
e1	1.20	1.40	0.047	0.055
L	0.525REF		0.021REF	
L1	0.26	0.46	0.010	0.018
$\theta$	-	8°	-	8°

## ● Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
G	-	0.65	-	0.025
H	-	1.94	-	0.076
X	0.40	-	0.016	-
Y	0.80	-	0.031	-

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [hongjiacheng](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBRA140TRPBF](#)  
[MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#)  
[NTSB30U100CT-1G](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)  
[ACDBA260LR-HF](#) [ACDBA1100-HF](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [VSSB410S-M3/5BT](#) [1N5819T-G](#) [PDS1040Q-13](#) [B160BQ-13-F](#)  
[SDM05U20CSP-7](#) [BAS 70-07 E6433](#) [B140S1F-7](#) [HSM560Je3/TR13](#) [DDB2265-000](#) [ZHCS506QTA](#) [HSM190Je3/TR13](#) [B330AF-13](#)  
[ACDBUC0230-HF](#) [SDM1U100S1F-7](#) [MBR10200CTF-G1](#) [CDLL5712](#) [DMF2822-000](#)