

Plastic-Encapsulate Transistors


TRANSISTOR (PNP)

FEATURES

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage		
	BC856W	-80	V
	BC857W	-50	
	BC858W	-30	
V_{CEO}	Collector-Emitter Voltage		
	BC856W	-65	V
	BC857W	-45	
	BC858W	-30	
V_{EBO}	Emitter-Base Voltage	-5	V
I_{c}	Collector Current –Continuous	-0.1	A
P_{C^*}	Collector Power Dissipation	150	mW
T_{J}	Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	-65-150	$^{\circ}\text{C}$






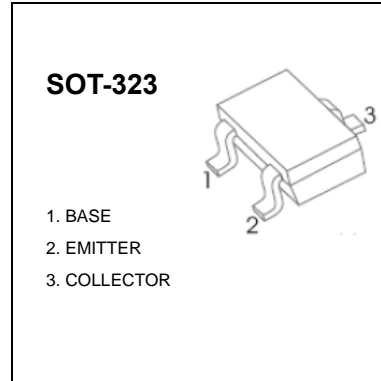


DEVICE MARKING

BC856AW=3A; BC856BW=3B;
BC857AW=3E; BC857BW=3F; BC857CW=3G;
BC858AW=3J; BC858BW=3K; BC858CW=3L

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	BC856W BC857W BC858W	V _{CBO}	I _C = -10μA, I _E =0	-80 -50 -30	V
Collector-emitter breakdown voltage	BC856W BC857W BC858W	V _{CEO}	I _C = -10mA, I _B =0	-65 -45 -30	V
Emitter-base breakdown voltage		V _{EBO}	I _E = -1μA, I _C =0	-5	V
Collector cut-off current		I _{CBO}	V _{CB} = -30 V , I _E =0		-15 nA
DC current gain	BC856AW, 857AW,858AW BC856BW, 857BW,858BW BC857CW,BC858CW	h _{FE}	V _{CE} = -5V, I _C = -2mA	125 220 420	250 475 800
Collector-emitter saturation voltage		V _{CE(sat)}	I _C =-100mA, I _B = -5mA		-0.65 V
Base-emitter saturation voltage		V _{BE(sat)}	I _C = -100mA, I _B = -5mA		-1.1 V
Transition frequency		f _T	V _{CE} = -5V, I _C = -10mA f=100MHz	100	MHz
Collector capacitance		C _{ob}	V _{CB} =-10V, f=1MHz		4.5 pF

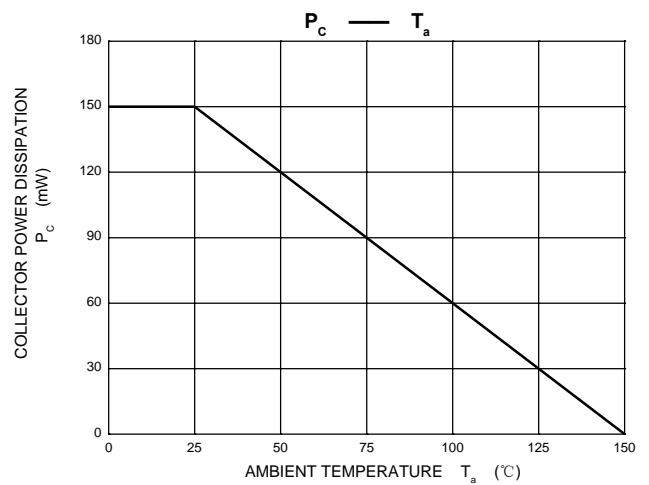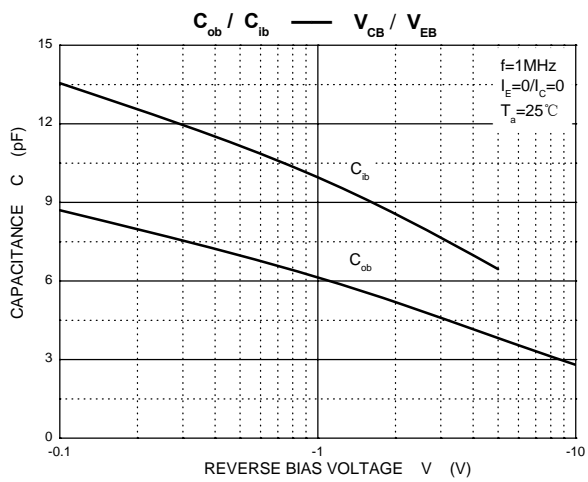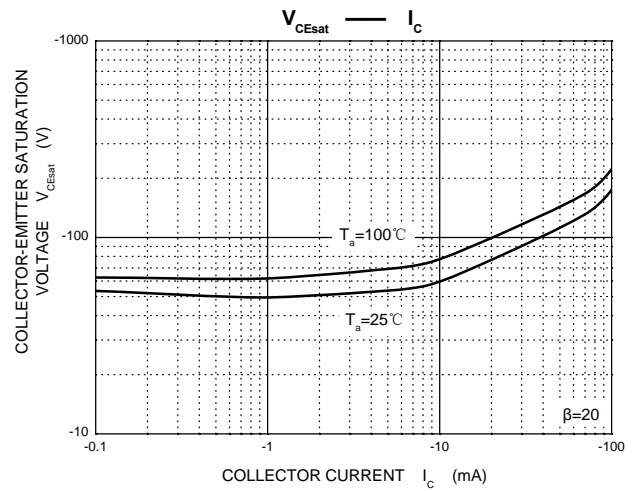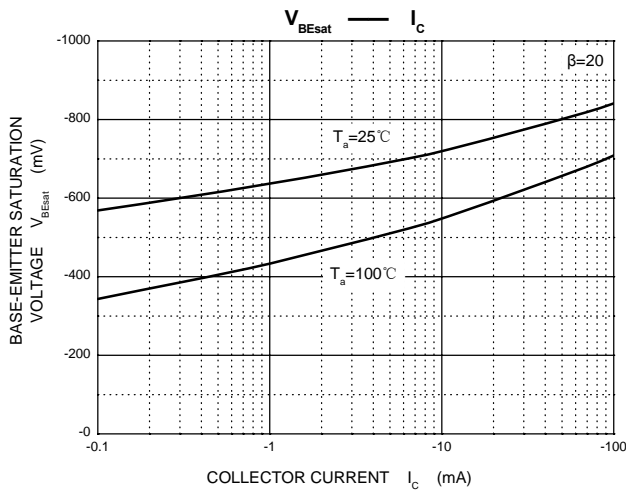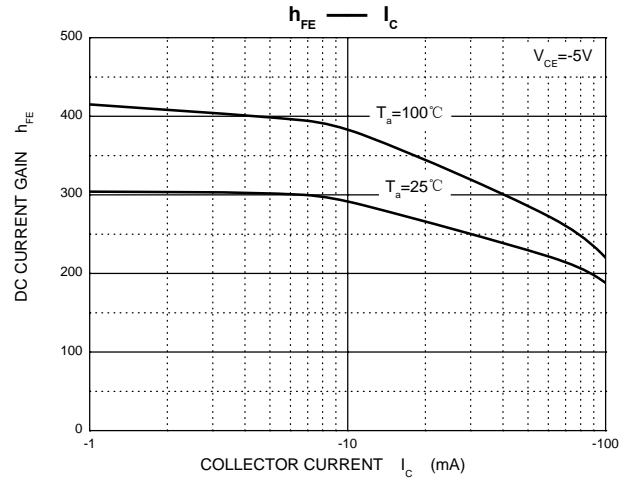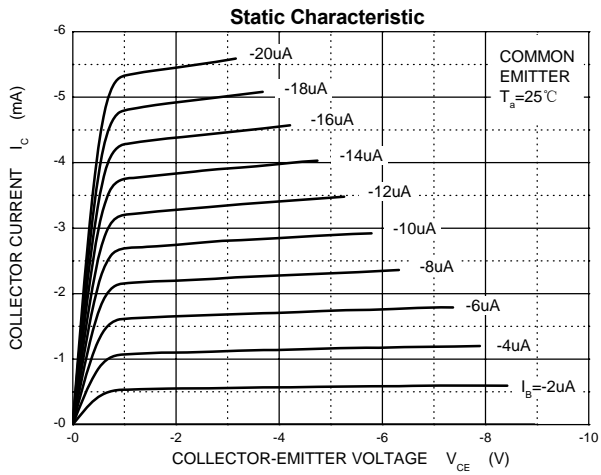

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-323

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Hong Kong Chuangji manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-](#)
[NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)