

TW Series – 22mm NEMA Style Pushbuttons



Key features:

- TW NEMA Style Switches with snap-on contacts
- Corrosion resistant octagonal chrome plated locking bezel
- Snap-on 10A contact blocks
- LED illumination
- Slow make, double break, contacts
- Modular construction for maximum flexibility
- Type 4X and IP65 watertight/oiltight panel
- Available assembled or as sub-components
- Finger-Safe - Spring-Up
- Large M3.5 screw terminals with captive sems plate

IDEC has your 22mm switching needs covered.

Button styles include flush, extended, mushroom, or square and all bodies are crafted from fracture-resistant nylon.

All illuminated units feature two lens styles, one that maximizes light dispersion, the other accommodates direct lens engraving.

Contact mechanism allow for a wide current rating, 5mA to 10A, which reduces the need for various contact materials.

When looking for a 22mm switch that is durable, easy to use, and versatile, then IDEC's TW series is your solution.



UL Listed
File No. E68961



TUV Rheinland



CSA Approved
File No. LR21451



File No. DK95-01696



Certificate No.
2030010305027380



Switches & Pilot Devices

Signaling Lights







Relays & Sockets

Timers

Contactors

Terminal Blocks



Circuit Breakers

| | | | | | | | |
|---|--|--|------------------------------|-------------------|-------------------|------------------------------------|----------------|
| Conforming to Standards | | EN60947-1, EN60947-5-1, VDE0660-200, UL508, CSA C22-2 No.14 | | | | | |
| Approvals | |  File No. E68961  File No. LR21451  Certificate No. 2030010305027380  Registration No: J9551802 (E-Stops) Registration No: J9551803 (All other switches) Registration No: J9551804 (Pilot Lights)  | | | | | |
| Operating Temperature | | Operation: -25 to +50°C (without freezing), Storage: -40 to +80°C (without freezing) | | | | | |
| Vibration Resistance | | 5 to 55Hz, 100m/sec ² (10g) conforming to IEC6068-2-6 | | | | | |
| Shock Resistance | | 1000m/sec ² (100g) conforming to IEC6068-2-7 | | | | | |
| Electric Shock Protection | | Class 2 conforming to IEC60664-7 | | | | | |
| Degree of Protection (conforming to IEC60529) (conforming to NEMA ICS6-110) | | IP65 from front of the panel; (IP54 for key switches) IP20 (Type HW-U contact block) Type 1, 2, 3, 3R, 3S, 4, 4X, 5, 12, 13 (Type 1, 2, 3R, 5, 12, 13 for key switches) | | | | | |
| Mechanical Life | | Momentary pushbuttons: 5,000,000 (1800 operations per hour) All other switches: 500,000 | | | | | |
| Pollution Degree (conforming to IEC60947-1) | | 3 | | | | | |
| Rated Operational Characteristics | | AC-15: A600 or Ue = 250V, Ie = 3A (NO, NC, NO-EM, NC-LB) DC-13: P600 or Ue = 125V, Ie = 1.1A (NO, NC) DC-13: Q600 or Ue = 125V, Ie = 0.9A (NO-EM, NC-LB) | | | | | |
| Rated Insulation Voltage | | 600V | | | | | |
| Rated Switching Over-Voltage | | Less than 4kV, conforming to IEC60947-1 | | | | | |
| Rated Impulse Withstanding Voltage | | 4kV for contact circuit, 2.5kV for lamp circuit | | | | | |
| Rated Thermal Current | | 10 Amp | | | | | |
| Minimum Switching Capacity | | 5 mA at 3V AC/DC | | | | | |
| Contact Operation | | Slow break NC or slow make NO, self-cleaning | | | | | |
| Recommended Terminal Torque | | Unit | | Wire | Number of Wires | Recommended Tightening Torque (Nm) | Terminal Screw |
| | | HW-U Contact Block | Solid Wire | Crimping Terminal | 2 | 1.0 to 1.3 | M3.5 |
| ø0.5 to 1.6 mm (AWG14 to 22) | 2 | | | 1.0 to 1.3 | | | |
| Stranded Wire | ø1.7 to 2.0 mm (AWG12) | | 1 | 1.2 to 1.3 | | | |
| | 0.3 to 2.0 mm ² (AWG14 to 22) | | 2 | 1.0 to 1.3 | | | |
| Illuminated Unit (*1) | Solid Wire | Crimping Terminal | 2 | 1.0 to 1.3 | M3.5 | | |
| | | ø0.5 to 1.6 mm (AWG14 to 22) | 2 | 1.0 to 1.3 | | | |
| | Stranded Wire | 0.3 to 2.0 mm (AWG14 to 22) | 1 | 1.2 to 1.3 | | | |
| | | 2.1 to 3.5 mm ² (AWG12) | 2 | 1.0 to 1.3 | | | |
| Applicable Wire Size | | Pilot Light | | 2 | 0.6 to 1.0 (M3.0) | | |
| | | Solid Wire | ø0.5 to 1.6 mm (AWG14 to 22) | | 1.0 to 1.3 (M3.5) | | |
| | | Stranded Wire | | | | ø0.3 to 2.0 mm (AWG14 to 22) | |
| | |  1. * refers to the lamp terminals of the illuminated push buttons and selector switches. | | | | | |
| External Short-Circuit Protection | | 10A 250V fuse conforming to IEC60269-1 | | | | | |
| Applicable Wire Size | | Minimum 1 x 22 AWG, max. 2 x 14 AWG or 1 x 12 AWG | | | | | |
| Contact Resistance | | Initial contact resistance of 50mΩ or less | | | | | |
| Contact Gap | | 4mm (NO and NC), 2mm (NO-EM and NC-LB) | | | | | |
| Electrical Reliability | | MTBF < 1 fault for 10 million operation cycles (3V DC, 5mA) | | | | | |
| Lamp Ratings | | LEDs: 6V: 17mA max, 12/24V: 11mA max, 120/240V: 10mA max | | | | | |
| Horsepower Rating | | 1/4 HP @ 120V (single-phase, non-reversing motor); 1 HP @ 240V (3 phase, non-reversing motor) | | | | | |
| Contact Material | | Silver | | | | | |

| | | | |
|-----------------|---|--|------------------------------|
| Contact Ratings | Pushbuttons | Contact Block | Type HW-U |
| | Illuminated Pushbuttons | Rated Insulation Voltage | 600V |
| | Selector Switches | Rated Continuous Current | 10A |
| | Illuminated Selector Switches Pushbutton Selectors | Contact Ratings by Utilization Category IEC 60947-5-1 | AC-15 (A600) DC-13 (P600) |

| | | Contact Ratings by Utilization Category | | | | | | | |
|-----------------|--|---|--|-----|------|------|------|------|----|
| | | | 24V | 48V | 50V | 110V | 220V | 440V | |
| Characteristics | Operational Voltage | | | | | | | | |
| | Operational Current | AC50/60Hz | AC-12 Control of resistive loads and solid state loads | 10A | — | 10A | 10A | 6A | 2A |
| | | DC | AC-15 Control of electromagnetic loads (> 72VA) | 10A | — | 7A | 5A | 3A | 1A |
| | DC-12 Control of resistive loads and solid state loads | | 10A | 5A | — | 2.2A | 1.1A | — | |
| | DC-13 Control of electromagnets | 5A | 2A | — | 1.1A | 0.6A | — | | |



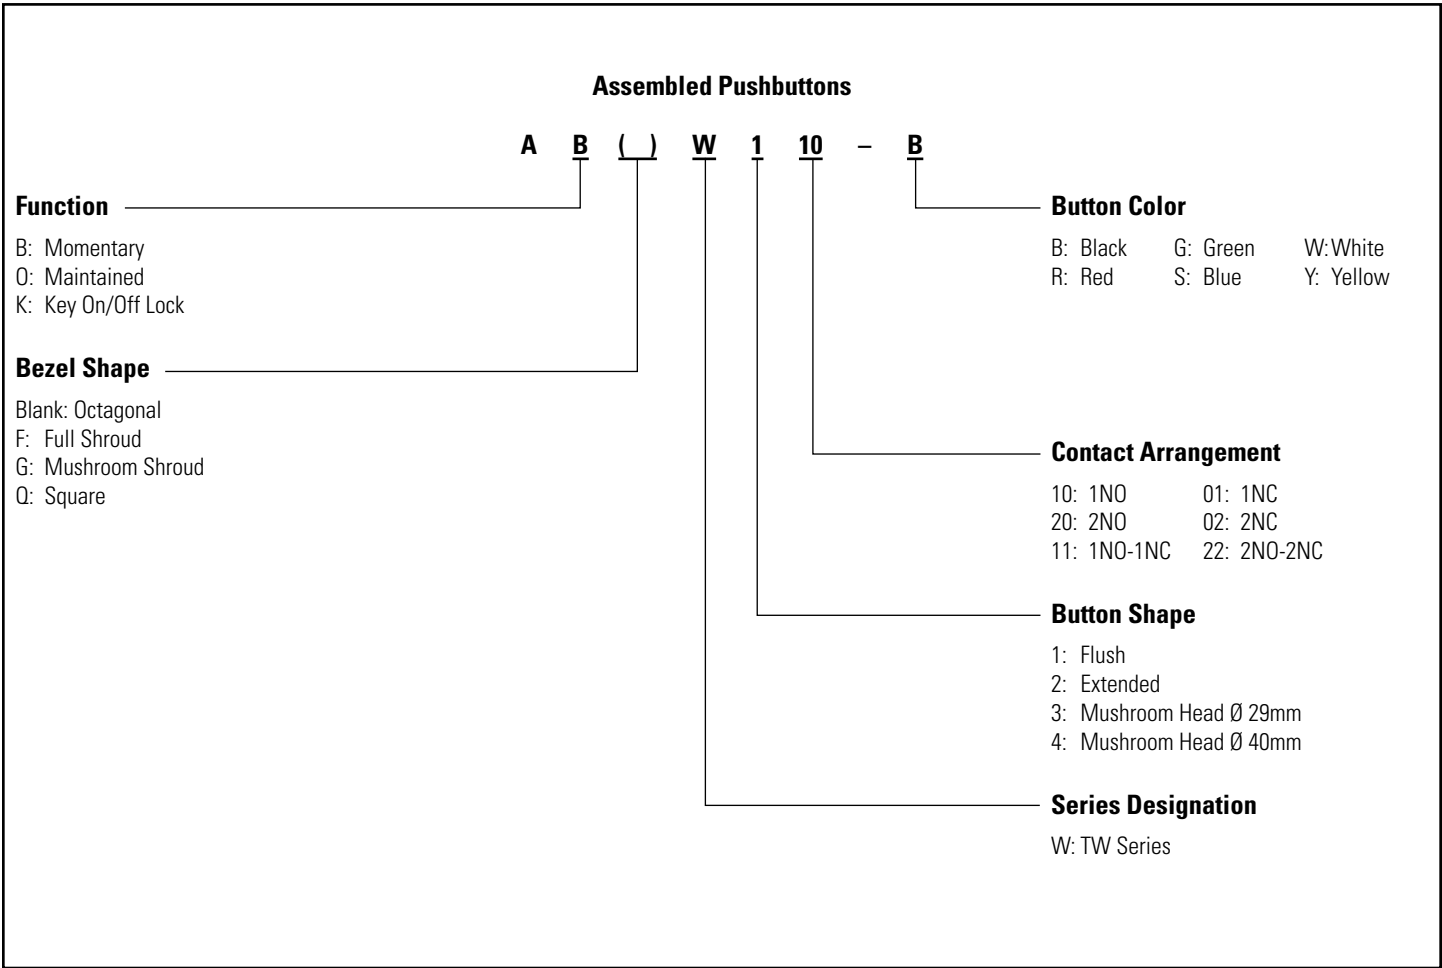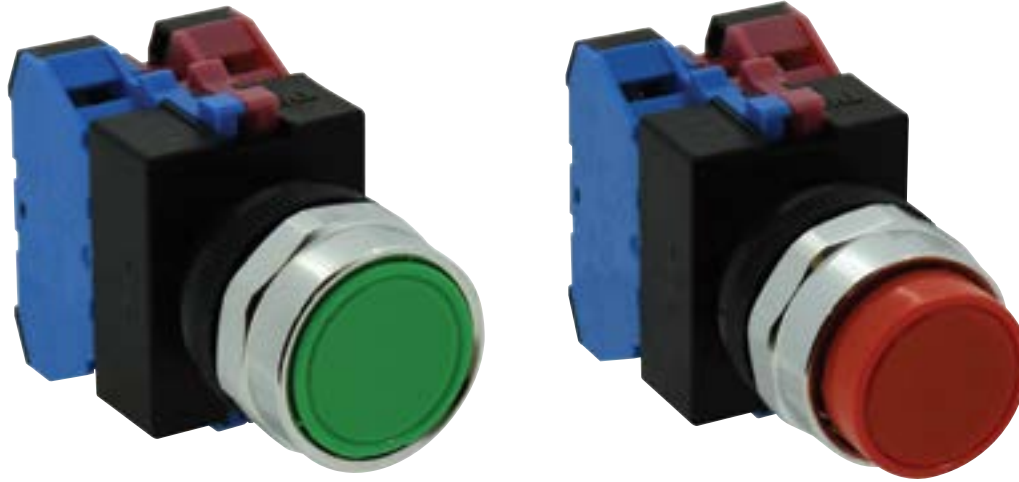






Non-Illuminated Pushbuttons (Assembled)



To be used for interpreting part numbers only, not for part number development.

Non-Illuminated Pushbuttons (Assembled) continued

Non-Illuminated Pushbuttons


| | Style | Contacts | Momentary Action | Maintained Action |
|---------------------------------------|---|-------------------------------------|---|---|
| Flush |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABW110-① ABW101-① ABW111-① ABW120-① ABW102-① | AOW110-① AOW101-① AOW111-① AOW120-① AOW102-① |
| Extended |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABW210-① ABW201-① ABW211-① ABW220-① ABW202-① | AOW210-① AOW201-① AOW211-① AOW220-① AOW202-① |
| Recessed |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABFW110-① ABFW101-① ABFW111-① ABFW120-① ABFW102-① | AOFW110-① AOFW101-① AOFW111-① AOFW120-① AOFW102-① |
| Extended with Full Shroud |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABFW210-① ABFW201-① ABFW211-① ABFW220-① ABFW202-① | AOFW210-① AOFW201-① AOFW211-① AOFW220-① AOFW202-① |
| Ø 29mm Mushroom Head |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABW310-① ABW301-① ABW311-① ABW320-① ABW302-① | AOW310-① AOW301-① AOW311-① AOW320-① AOW302-① |
| Ø 40mm Mushroom Head |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABW410-① ABW401-① ABW411-① ABW420-① ABW402-① | AOW410-① AOW401-① AOW411-① AOW420-① AOW402-① |
| Ø 40mm Mushroom Head with Full Shroud |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABGW410-① ABGW401-① ABGW411-① ABGW420-① ABGW402-① | AOGW410-① AOGW401-① AOGW411-① AOGW420-① AOGW402-① |
| Square Flush |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABQW110-① ABQW101-① ABQW111-① ABQW120-① ABQW102-① | AQQW110-① AQQW101-① AQQW111-① AQQW120-① AQQW102-① |
| Square Extended |  | 1NO 1NC 1NO-1NC 2NO 2NC | ABQW210-① ABQW201-① ABQW211-① ABQW220-① ABQW202-① | AQQW210-① AQQW201-① AQQW211-① AQQW220-① AQQW202-① |
| Keylock Push On/Off |  | 1NO 1NC 1NO-1NC 2NO 2NC | AKW210 AKW201 AKW211 AKW220 AKW202 | — |

① Button Color Codes

| Color | Code |
|--------|------|
| Black | B |
| Green | G |
| Red | R |
| Blue | S |
| Yellow | Y |
| White | W |

- 1. In place of ①, specify the Button Color Code from table.
- 2. For sub-assembled part numbers, see next page.
- 3. For accessories, see page 728.
- 4. For dimensions, see page 730.
- 5. Keyed switches are supplied with two keys. All units are keyed alike.

Non-Illuminated Pushbuttons (Sub-Assembled)

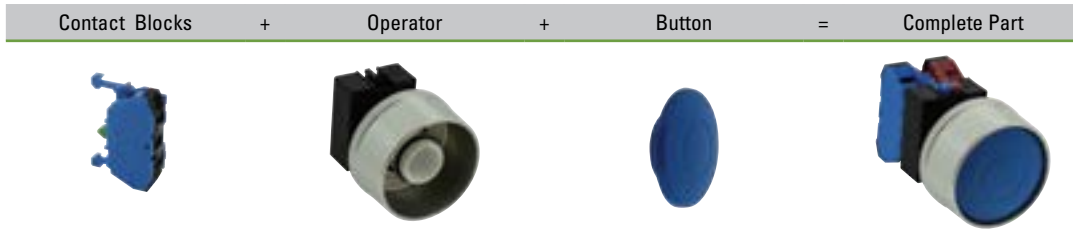

Operators

| Style | Part Number | |
|--|-------------|------------|
| | Momentary | Maintained |
| Round Flush/Extended  | ABW-100 | AOW-100 |
| Round with Full Shroud/Recessed  | ABFW-200 | AOFW-200 |
| Ø 40mm, Ø 29mm Mushroom Head  | ABW-300 | AOW-300 |
| Ø 40mm Mushroom Head with Full Shroud  | ABGW-400 | AOGW-400 |
| Square Flush/Extended  | ABQW-100 | AQQW-100 |
| Keylock Push On/Off  | — | AKW-200 |



Buttons

| Style | Part Number |
|--|-------------|
| Round Flush  | ABW1B-① |
| Round Extended  | ABW2B-① |
| Ø 29mm Mushroom  | ABW3B-① |
| Ø 40mm Mushroom  | ABW4B-① |
| Square Flush  | ABQW1B-① |
| Square Extended  | ABQW2B-① |



In place of ① specify the button color code from table

Contact Blocks

| Style | Contacts | 1NO | 1NC |
|---|--------------------------------|------------------------------------|------------------------------------|
|  | Finger-Safe Spring-Up Terminal | HW-U10-F HW-U10R-F (early make) | HW-U01-F HW-U01R-F (late break) |
|  | Dummy Block | HW-DB | |




- Dummy blocks (no contacts) are used with an odd number of contact blocks.
- Use of early and late break contacts creates a make before break function

① Button Color Codes

| Color | Code |
|--------|------|
| Black | B |
| Green | G |
| Red | R |
| Blue | S |
| Yellow | Y |
| White | W |

Stop Switches (Assembled)



 To be used for interpreting part numbers only, not for part number development.

Assembled Stop Switches

A V (L) W 4 (B) (99) 11 (D) - R - (24V)

| | |
|---|--|
| <p>Function</p> <p>V: Pushlock Turn Reset Y: Push-Pull X: Pushlock Key Reset</p> <p>Illumination</p> <p>Blank: None L: Illuminated</p> <p>Series Designation</p> <p>W: TW Series</p> <p>Button/Lens Size</p> <p>3: 29mm Mushroom 4: 40mm Mushroom</p> <p>Lens Type (illuminated units only)</p> <p>Blank: Standard (ribbed) B: Engravable (smooth with insert)</p> <p>Illuminated Circuit (illuminated unit only)</p> <p>99: Full Voltage (LED determines voltage) 126: 120V AC Step Down Transformer 246: 240V AC Step Down Transformer 486: 480V AC Step Down Transformer</p> | <p>Lamp Voltage (full voltage illuminated units only)</p> <p>6V: 6V AC/DC 12V: 12V AC/DC 24V: 24V AC/DC 120V: 120V AC 240V: 240V AC</p> <p>Button/Lens Color</p> <p>A: Amber R: Red W: White G: Green S: Blue Y: Yellow B: Black</p> <p>Lamp Type (illuminated units only)</p> <p>D: LED</p> <p>Contact Arrangement</p> <p>10: 1NO 01: 1NC 20: 2NO 02: 2NC 11: 1NO/1NC 22: 2NO/2NC</p> |
|---|--|

Stop Switches (Assembled), continued

Non-Illuminated Stop Switches

| Style | Contacts | Part Number |
|-------|----------|-------------|
| | 1NO | AVW410-R* |
| | 1NC | AVW401-R* |
| | 1NO-1NC | AVW411-R* |
| | 2NO | AVW420-R* |
| | 2NC | AVW402-R* |
| | 1NO | AVW310-R* |
| | 1NC | AVW301-R* |
| | 1NO-1NC | AVW311-R* |
| | 2NO | AVW320-R* |
| | 2NC | AVW302-R* |
| | 1NO | AYW410-① |
| | 1NC | AYW401-① |
| | 1NO-1NC | AYW411-① |
| | 2NO | AYW420-① |
| | 2NC | AYW402-① |
| | 1NO | AXW410- R* |
| | 1NC | AXW401- R* |
| | 1NO-1NC | AXW411- R* |
| | 2NO | AXW420- R* |
| | 2NC | AXW402- R* |

① Button Color Codes

| Color | Code |
|--------|------|
| Black | B |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

② LED/Lens Color Codes

| Color | Code |
|-------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |

③ Full Voltage Codes

| Voltage | Code |
|-----------|------|
| 6V AC/DC | 6V |
| 12V AC/DC | 12V |
| 24V AC/DC | 24V |
| 120V AC | 120V |
| 240V AC | 240V |

④ Transformer Voltage Codes

| Voltage | Code |
|---------|------|
| 120VAC | 126 |
| 240VAC | 246 |
| 480VAC | 486 |

Transformers step down to 6V.


- 1. *Available in Red only.
- 2. In place of ①, specify the Button Color Code from table.
- 3. For sub-assembled part numbers, see next page.
- 4. For accessories, see page 728.
- 5. For dimensions, see page 730.

Illuminated Stop Switches

| Style | Type | Contacts | Part Number |
|-------|--------------|----------|-----------------|
| | Transformer | 1NO-1NC | AVLW4 ④ 11D-R* |
| | | 2NO | AVLW4 ④ 20D-R* |
| | | 2NC | AVLW4 ④ 02D-R* |
| | Full Voltage | 1NO-1NC | AVLW49911D-R*-③ |
| | Transformer | 1NO-1NC | AVLW3④11D-R* |
| | | 2NO | AVLW3④20D-R* |
| | | 2NC | AVLW3④02D-R* |
| | Full Voltage | 1NO-1NC | AVLW39911D-R*-③ |
| | | 2NO | AVLW39920D-R*-③ |
| | | 2NC | AVLW39902D-R*-③ |
| | Transformer | 1NO-1NC | AYLW4 ④ 11D-② |
| | | 2NO | AYLW4 ④ 20D-② |
| | | 2NC | AYLW4 ④ 02D-② |
| | Full Voltage | 1NO-1NC | AYLW49911D-②-③ |
| | | 2NO | AYLW49920D-②-③ |
| | | 2NC | AYLW49902D-②-③ |

- 1. *Available in red only.
- 2. In place of ②, specify the Lens Color Code (see table above).
- 3. In place of ③, specify the Full Voltage Code (lamp voltage) (see table above).
- 4. In place of ④, specify the Transformer Voltage Code (see table above).
- 5. For sub-assembly part numbers, see next page.
- 6. For accessories, see page 728.
- 7. For dimensions, see page 730.

Stop Switches (Sub-Assembled)



*Not applicable for full voltage units

Operators


| Style | Part Number | |
|---|-----------------|-------------|
| | Non-Illuminated | Illuminated |
| Ø 29/Ø 40mm Pushlock Turn Reset  | AVW-300 | AVLW3-0600 |
| Ø 40mm Push-Pull  | AYW-400 | AYLW4-0600 |
| Ø 40mm Pushlock Key Reset  | AXW-300 | — |

Buttons

| Style | Part Number |
|--|-------------|
| Ø 40mm Pushlock Turn Reset  | AVW4B-R* |
| Ø 29mm Pushlock Turn Reset  | AVW3B-R* |
| Ø 40mm Push-Pull  | AYW4B-⊙ |
| Ø 40mm Pushlock Key Reset  | AXW4B-R* |

- 1. *Available in Red only
- 2. In place of ⊙, specify the button color code from table.

Lamps

| Style | Voltage | Part Number |
|--|-----------|-------------|
| LED  | 6V AC/DC | LSTD-6⊙ |
| | 12V AC/DC | LSTD-1⊙ |
| | 24V AC/DC | LSTD-2⊙ |
| | 120V AC | LSTD-H2⊙ |
| | 240V AC | LSTD-M4⊙ |

- 1. In place of ⊙, specify the LED color code.
- 2. The LED contains a current-limiting resistor and a protection diode.

① Button Color Codes

| Color | Code |
|--------|------|
| Black | B |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

② LED/Lens Color Codes

| Color | Code |
|-------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |



Illuminated Stop Switches (Sub-Assembled) continued

Lenses

| Style | Part Number | |
|--|-------------|-------------|
| | Standard | Engravable |
| Ø 29mm Head Pushlock Turn Reset  | AVLW3LU-R* | AVLW3BLU-R* |
| Ø 40mm Head Pushlock Turn Reset  | AVLW4LU-R* | AVLW4BLU-R* |
| Ø 40mm Head Push Pull  | AYLW4LU-Ⓢ | AYLW4BLU-Ⓢ |


- 1. In place of Ⓢ, specify the lens color code from table on previous page.
- 2. *Available only in red
- 3. Standard lenses have ribbed pattern, Engravable lenses are smooth and include an engravable insert.

Lamp Circuit Components



| Style | Application | Part Number |
|---|---|-------------|
| Long Lamp Holder  | Used with Full-size Transformer and two contact blocks | TW-LH2 |
| Lead Holder  | Used with TW-LH2 holder when using four contact blocks and transformer | HW-LH3 |

Transformers/Full Voltage Modules

| Style | Description | Part Number |
|---|--|-------------|
| Full Size Transformer  | 120V AC | TW-F126B |
| | 240V AC | TW-F246B |
| | 480V AC | TW-F486B |
| Dummy Block with Full Voltage Adaptor  | For use with odd number of contacts. Finger-Safe | HW-DA1FBN |
| Full Voltage Adaptor  | For use with even number of contacts. Finger-Safe | TW-DA1FB |

 All Transformers step down to 6V (use 6V LED).

Contact Blocks

| Style | Contacts | 1NO | 1NC |
|---|--------------------------------|------------------------|------------------------|
|  | Finger-Safe Spring-Up Terminal | HW-U10-F | HW-U01-F |
| | | HW-U10R-F (early make) | HW-U01R-F (late break) |
|  | Dummy Block | HW-DB | |

- 1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
- 2. Use of early and late break contacts creates a make before break function

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors

Terminal Blocks

Circuit Breakers

Pilot Lights (Assembled)



Assembled Pilot Lights

A P (Q) W 1 (B) (99) (D) - R - (24V)

Function

P: Pilot Light

Bezel Shape

Blank: Octagonal (round lenses)
Q: Square

Series Designation

W: TW Series

Lens Shape

1: Flat
2: Dome

Lens Type

Blank: Standard (ribbed)
B: Engravable (smooth with insert included)

Illumination Circuit

- 99: Full Voltage (lamp determines voltage)
- 126: 120V AC Step Down Transformer
- 246: 240V AC Step Down Transformer
- 486: 480V AC Step Down Transformer



1. Use only when interpreting part numbers. Do not use for developing part numbers.
2. All transformers step down to 6V.

Lamp Voltage

(Full Voltage Units Only)

- 6V: 6V AC/DC
- 12V: 12V AC/DC
- 24V: 24V AC/DC
- 120V: 120V AC
- 240V: 240V AC

Lens Color Code

- A: Amber
- G: Green
- R: Red
- S: Blue
- W: White
- Y: Yellow

Lamp

D: LED

Pilot Lights (Assembled) continued

Assembled Pilot Lights

| Style | Type | Voltage | Part Number |
|-------------|--------------|----------------------------|--|
| Round Flat | Transformer | 120VAC 240VAC 480VAC | APW1126D-② APW1246D-② APW1486D-② |
| | Full Voltage | — | APW199D-②-③ |
| Dome | Transformer | 120VAC 240VAC 480VAC | APW2126D-② APW2246D-② APW2486D-② |
| | Full Voltage | — | APW299D-②-③ |
| Square Flat | Transformer | 120VAC 240VAC 480VAC | APQW1B126D-② APQW1B246D-② APQW1B486D-② |
| | Full Voltage | — | APQW1B99D-②-③ |

② Lens Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

③ Full Voltage Codes

| Voltage | Code |
|-----------|------|
| 6V AC/DC | 6V |
| 12V AC/DC | 12V |
| 24V AC/DC | 24V |
| 120V AC | 120V |
| 240V AC | 240V |

- 1. In place of ②, specify the Lens Color Code from table below.
- 2. In place of ③, specify the Full Voltage Code from table below.
- 3. For accessories, see page 728.
- 4. For dimensions, see page 730.
- 5. For sub-assembly part numbers, see next page.
- 6. Yellow pilot light comes with white LED.

Pilot Lights (Sub-Assembled)



* Transformer not required for full voltage units.

Operators

| Style | Part Number |
|---|-------------|
| Round Dome/Flat | APW-199 |
|  | |
| Square | UPQW-199 |
|  | |



Same operator is used for full voltage as for transformer completed units.

Lamps

| Style | Voltage | Part Number |
|-------|-----------|-------------|
| LED | 6V AC/DC | LSTD-6Ⓢ |
| | 12V AC/DC | LSTD-1Ⓢ |
| | 24V AC/DC | LSTD-2Ⓢ |
| | 120V AC | LSTD-H2Ⓢ |
| | 240V AC | LSTD-M4Ⓢ |



1. In place of Ⓢ, specify the LED color code.
2. The LED contains a current-limiting resistor and a protection diode.
3. Yellow LED not available. Use white LED.

Ⓢ LED/Lens Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |



If clear lens is desired, use white marking lens and remove engraving insert

Transformers

| Style | Description | Part Number |
|---|---------------------|-------------|
|  | 120V AC | TW-F126B |
| | Finger-Safe 240V AC | TW-F246B |
| | 480V AC | TW-F486B |



All Transformers step down to 6V (use 6V LED).

Lenses

| Style | Part Number | |
|---|-------------|------------|
| | Standard | Engravable |
| Dome | APW2LU-Ⓢ | — |
|  | | |
| Round Flat | APW1LU-Ⓢ | APW1BLU-Ⓢ |
|  | | |
| Square Flat | — | APQW1BLU-Ⓢ |
|  | | |



1. In place of Ⓢ, specify the Lens Color Code from table.
2. Standard lenses have a ribbed lens to enhance light dispersion. Marking lenses are smooth and include an engraving insert.

Illuminated Pushbuttons (Assembled)



Assembled Illuminated Pushbuttons

A L (F) W 2 (B) 99 11 (D) - R - (24V)

Function

L: Momentary Action
OL: Maintained Action

Bezel Shape

Blank: Octagonal (round lenses)
F: Full Shroud (round lenses)
O: Square

Series Designation

W: TW series

Lens Shape/Size

2: Standard Extended (round or square)
3: 29mm Mushroom
4: 40mm Mushroom

Lens Type

Blank: Standard (ribbed)
B: Engravable (smooth with insert)

Illumination Circuit

99: Full Voltage (lamp determines voltage)
126: 120V AC Step Down Transformer
246: 240V AC Step Down Transformer
486: 480V AC Step Down Transformer

Lamp Voltage

(Full Voltage Units Only)

6V: 6V AC/DC
12V: 12V AC/DC
24V: 24V AC/DC
120V: 120V AC
240V: 240V AC

Lens Code

A: Amber
G: Green
R: Red
S: Blue
W: White
Y: Yellow

Lamp Type

D: LED Lamp

Contact Arrangement

| | |
|-------------|-------------|
| 10: 1NO | 01: 1NC |
| 20: 2NO | 02: 2NC |
| 11: 1NO-1NC | 22: 2NO-2NC |



1. Use only when interpreting part numbers. Do not use for developing part numbers.
2. Transformers step down to 6V.

Illuminated Pushbuttons (Assembled)

Illuminated Pushbuttons

| Style | Contacts | Part Number | | |
|---|--------------|-----------------------|---|--|
| | | Momentary | Maintained | |
| Extended Lens  | Transformer | 1NO-1NC 2NO 2NC | ALW2 ④ 11D-② ALW2 ④ 20D-② ALW2 ④ 02D-② | AOLW2 ④ 11D-② AOLW2 ④ 20D-② AOLW2 ④ 02D-② |
| | Full Voltage | 1NO-1NC 2NO 2NC | ALW29911D-②-③ ALW29920D-②-③ ALW29902D-②-③ | AOLW29911D-②-③ AOLW29920D-②-③ AOLW29902D-②-③ |
| Extended Lens with Full Shroud  | Transformer | 1NO-1NC 2NO 2NC | ALFW2 ④ 11D-② ALFW2 ④ 20D-② ALFW2 ④ 02D-② | AOLFW2 ④ 11D-② AOLFW2 ④ 20D-② AOLFW2 ④ 02D-② |
| | Full Voltage | 1NO-1NC 2NO 2NC | ALFW29911D-②-③ ALFW29920D-②-③ ALFW29902D-②-③ | AOLFW29911D-②-③ AOLFW29920D-②-③ AOLFW29902D-②-③ |
| ø29mm Mushroom Button  | Transformer | 1NO-1NC 2NO 2NC | ALW3 ④ 11D-② ALW3 ④ 20D-② ALW3 ④ 02D-② | AOLW3 ④ 11D-② AOLW3 ④ 20D-② AOLW3 ④ 02D-② |
| | Full Voltage | 1NO-1NC 2NO 2NC | ALW39911D-②-③ ALW39920D-②-③ ALW39902D-②-③ | AOLW39911D-②-③ AOLW39920D-②-③ AOLW39902D-②-③ |
| ø40mm Mushroom Button  | Transformer | 1NO-1NC 2NO 2NC | ALW4 ④ 11D-② ALW4 ④ 20D-② ALW4 ④ 02D-② | AOLW4 ④ 11D-② AOLW4 ④ 20D-② AOLW4 ④ 02D-② |
| | Full Voltage | 1NO-1NC 2NO 2NC | ALW49911D-②-③ ALW49920D-②-③ ALW49902D-②-③ | AOLW49911D-②-③ AOLW49920D-②-③ AOLW49902D-②-③ |
| Square Extended  | Transformer | 1NO-1NC 2NO 2NC | ALQW2B ④ 11D-② ALQW2B ④ 20D-② ALQW2B ④ 02D-② | AOLQW2B ④ 11D-② AOLQW2B ④ 20D-② AOLQW2B ④ 02D-② |
| | Full Voltage | 1NO-1NC 2NO 2NC | ALQW2B9911D-②-③ ALQW2B9920D-②-③ ALQW2B9902D-②-③ | AOLQW2B9911D-②-③ AOLQW2B9920D-②-③ AOLQW2B9902D-②-③ |

② LED/Lens Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

- 1. Mushroom lenses not available in yellow.
- 2. Yellow pushbutton comes with white LED.

③ Full Voltage Codes

| Voltage | Code |
|-----------|------|
| 6V AC/DC | 6V |
| 12V AC/DC | 12V |
| 24V AC/DC | 24V |
| 120V AC | 120V |
| 240V AC | 240V |

④ Transformer Voltage Codes

| Voltage | Code |
|---------|------|
| 120VAC | 126 |
| 240VAC | 246 |
| 480VAC | 486 |

- Transformers step down to 6V (use 6V LED).

- 1. In place of ②, specify the Lens Color Code (see table). Mushroom lenses not available in yellow.
- 2. In place of ③, specify the Full Voltage Code (lamp voltage) (see table).
- 3. In place of ④, specify the Transformer Voltage Code (see table).
- 4. For sub-assembly part numbers, see next page.
- 5. For accessories, see page 728.
- 6. For dimensions, see page 730.
- 7. Light is independent of switch position.
- 8. Yellow pushbutton comes with white LED.

Illuminated Pushbuttons (Sub-Assembled)



*Not applicable for full voltage units

Operators

| Style | Part Number | |
|---------------------------|-------------|--------------|
| | Momentary | Maintained |
| Extended | ALW-0600 | AOLW-0600 |
| Extended with Full Shroud | ALFW-0600 | AOLFW-0600 |
| ø29mm/ø40mm Mushroom | ALW3-0600 | AOLW3-0600 |
| Square/Extended | ALQW-2B0600 | AOLQW-2B0600 |

Lamps

| Style | Voltage | Part Number |
|-------|-----------|-------------|
| LED | 6V AC/DC | LSTD-6Ⓢ |
| | 12V AC/DC | LSTD-1Ⓢ |
| | 24V AC/DC | LSTD-2Ⓢ |
| | 120V AC | LSTD-H2Ⓢ |
| | 240V AC | LSTD-M4Ⓢ |

- 1. In place of Ⓢ, specify the LED color code.
- 2. The LED contains a current-limiting resistor and a protection diode.

Lamp Circuit Components

| Style | Application | Part Number |
|------------------|---|-------------|
| Long Lamp Holder | Used with Full-size Transformer and two contact blocks | TW-LH2 |
| Lead Holder | Used with TW-LH2 holder when using four contact blocks and transformer | HW-LH3 |

Lenses

| Style | Part Number | |
|-----------------------|-------------|------------|
| | Standard | Engravable |
| Round Extended | ALW2LU-Ⓢ | ALW2BLU-Ⓢ |
| ø 29mm Mushroom Head* | ALW3LU-Ⓢ | ALW3BLU-Ⓢ |
| ø 40mm Mushroom Head* | ALW4LU-Ⓢ | ALW4BLU-Ⓢ |
| Square Extended | — | ALQW2BLU-Ⓢ |

Ⓢ LED/Lens Color Codes



| Color | Code | Color | Code |
|-------|------|--------|------|
| Amber | A | Blue | S |
| Green | G | White | W |
| Red | R | Yellow | Y |

Yellow LED not available. Use white LED.

- 1. In place of Ⓢ, specify the lens color code from table on the bottom right.
- 2. *Mushroom lens not available in yellow.
- 3. Standard lenses have ribbed pattern, Engravable lenses are smooth and include an engravable insert.

Illuminated Pushbuttons (Sub-Assembled) continued


Contact Blocks

| Style | Contacts | 1NO | 1NC |
|---|--------------------------------|------------------------|------------------------|
|  | Finger-Safe Spring-Up Terminal | HW-U10-F | HW-U01-F |
| | | HW-U10R-F (early make) | HW-U01R-F (late break) |
|  | Dummy Block | HW-DB | |

- 1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
- 2. Use of early and late break contacts creates a make before break function

Transformers/Full Voltage Modules

| Style | Description | Part Number |
|--|--|--------------------------|
|  | Full Size Transformer | |
| | Finger-Safe | 120V AC TW-F126B |
| | Finger-Safe | 240V AC TW-F246B |
| Finger-Safe | 480V AC TW-F486B | |
| Dummy Block with Full Voltage Adaptor |  For use with odd number of contacts. | Finger-Safe HW-DA1FBN |
| Full Voltage Adaptor |  For use with even number of contacts. | Finger-Safe TW-DA1FB |

 All Transformers step down to 6V (use 6V LED).

Non-Illuminated Selector Switches (Assembled)



Assembled Selector Switches

A S W 3 (1) (L) 20 - 304

Function

S: Selector Switch

Series Designation

W: TW Series

Number of Positions

- 2: 2-Position
- 3: 3-Position
- 4: 4-Position
- 5: 5-Position

Spring Return Action

Blank: Maintained

- 1: Spring return from Right (2 or 3 position)
- 2: Spring return from Left (2 or 3 position)
- 3: 2-Way spring return from Left and Right (3 position only)

Circuit Number

(Standard circuits shown on following pages and 720.)

Contact Arrangement Code

- 10: 1NO 01: 1NC
- 20: 2NO 02: 2NC
- 40: 4NO 04: 4NC
- 11: 1NO-1NC 22: 2NO-2NC




Operator Style Code

- Blank: Knob Operator
- L: Lever Operator
- K: Key Operator

- 1. Use only when interpreting part numbers. Do not use for developing part numbers.
- 2. Custom contact configurations available.
- 3. Custom key removable codes available.
- 4. Portions of part number inside () are optional.

Non-Illuminated Selector Switches (Assembled) continued

2-Position Selector Switches

| Contact | Style | | | | Part Number | | |
|------------|------------------|-------------------|------------------|----------------------|---|---|---|
| | Mounting | Operator Position | | | Maintained | Spring Return from Right | Spring Return from Left |
| | | L | R | |  |  |  |
| 1NO | 1 2 | 0 0 | X 0 | Knob Lever Key | ASW210 ASW2L10 ASW2K10 | ASW2110 ASW21L10 ASW21K10 | ASW2210 ASW22L10 ASW22K10 |
| 1NC | 1 2 | X 0 | 0 0 | Knob Lever Key | ASW201-116 ASW2L01-116 ASW2K01-116 | ASW2101-116 ASW21L01-116 ASW21K01-116 | ASW2201-116 ASW22L01-116 ASW22K01-116 |
| 1NO 1NC | 1 2 | X 0 | 0 X | Knob Lever Key | ASW211 ASW2L11 ASW2K11 | ASW2111 ASW21L11 ASW21K11 | ASW2211 ASW22L11 ASW22K11 |
| 2NO | 1 2 | 0 0 | X X | Knob Lever Key | ASW220 ASW2L20 ASW2K20 | ASW2120 ASW21L20 ASW21K20 | ASW2220 ASW22L20 ASW22K20 |
| 2NC | 1 2 | X X | 0 0 | Knob Lever Key | ASW202-104 ASW2L02-104 ASW2K02-104 | ASW2102-104 ASW21L02-104 ASW21K02-104 | ASW2202-104 ASW22L02-104 ASW22K02-104 |
| 2NO 2NC | 1 2 3 4 | 0 X 0 X | X 0 X 0 | Knob Lever Key | ASW222 ASW2L22 ASW2K22 | ASW2122 ASW21L22 ASW21K22 | ASW2222 ASW22L22 ASW22K22 |
| 2NO 2NC | 1 2 3 4 | 0 0 X X | X X 0 0 | Knob Lever Key | ASW222-111 ASW2L22-111 ASW2K22-111 | ASW2122-111 ASW21L22-111 ASW21K22-111 | ASW2222-111 ASW22L22-111 ASW22K22-111 |



Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors

Terminal Blocks

Circuit Breakers

Non-Illuminated Selector Switches (Assembled) continued

3-Position Selector Switches

| Contact | Mounting | Style | | | | Part Number | | | |
|------------|------------------|-------------------|------------------|------------------|----------------------|--|---|---|---|
| | | Operator Position | | | | Maintained | Spring Return from Right | Spring Return from Left | Spring Return Two-Way |
| | | L | C | R | | | | | |
| 2NO | 1 2 | X 0 | 0 0 | 0 X | Knob Lever Key | ASW320 ASW3L20 ASW3K20 | ASW3120 ASW31L20 ASW31K20 | ASW3220 ASW32L20 ASW32K20 | ASW3320 ASW33L20 ASW33K20 |
| 2NC | 1 2 | 0 X | X X | X 0 | Knob Lever Key | ASW302 ASW3L02 ASW3K02 | ASW3102 ASW31L02 ASW31K02 | ASW3202 ASW32L02 ASW32K02 | ASW3302 ASW33L02 ASW33K02 |
| 2NO 2NC | 1 2 3 4 | X 0 0 X | 0 0 X X | 0 X X 0 | Knob Lever Key | ASW322 ASW3L22 ASW3K22 | ASW3122 ASW31L22 ASW31K22 | ASW3222 ASW32L22 ASW32K22 | ASW3322 ASW33L22 ASW33K22 |
| 2NO 2NC | 1 2 3 4 | X X 0 0 | 0 X X 0 | X 0 0 X | Knob Lever Key | ASW322-309 ASW3L22-309 ASW3K22-309 | ASW3122-309 ASW31L22-309 ASW31K22-309 | ASW3222-309 ASW32L22-309 ASW32K22-309 | ASW3322-309 ASW33L22-309 ASW33K22-309 |
| 2NO 2NC | 1 2 3 4 | 0 0 0 0 | X X X 0 | 0 X 0 X | Knob Lever Key | ASW322-310 ASW3L22-310 ASW3K22-310 | ASW3122-310 ASW31L22-310 ASW31K22-310 | ASW3222-310 ASW32L22-310 ASW32K22-310 | ASW3322-310 ASW33L22-310 ASW33K22-310 |
| 4NO | 1 2 3 4 | X 0 X 0 | 0 0 0 0 | 0 X 0 X | Knob Lever Key | ASW340 ASW3L40 ASW3K40 | ASW3140 ASW31L40 ASW31K40 | ASW3240 ASW32L40 ASW32K40 | ASW3340 ASW33L40 ASW33K40 |
| 4NC | 1 2 3 4 | 0 X 0 X | X X X X | X 0 X 0 | Knob Lever Key | ASW304 ASW3L04 ASW3K04 | ASW3104 ASW31L04 ASW31K04 | ASW3204 ASW32L04 ASW32K04 | ASW3304 ASW33L04 ASW33K04 |



- The truth table indicates the operating position of contact block when the operator is switched to that position.
X = On (closed contacts)
0 = Off (open contacts)
X—X = Overlapping Contacts: Remain on (closed contacts) when switch is moved between these two positions.
- All knob and lever selector switches come in black. Other colors are available by ordering the knob or lever separately.
- Every key selector switch uses an identical key. The key is removable in any maintained position.
- Custom contact configurations are available, see page 720.


4-Position Selector Switch

| Contact | Mounting | Style | | | | | Maintained |
|------------|------------------|-------------------|------------------|------------------|------------------|---------------|---------------------------|
| | | Operator Position | | | | | Part Number |
| | | 1 | 2 | 3 | 4 | | |
| 2NO 2NC | 1 2 3 4 | X 0 0 0 | 0 X 0 0 | 0 0 X 0 | 0 0 0 X | Knob Lever | ASW422-411 ASW4L22-411 |

5-Position Selector Switch



| Contact | Mounting | Style | | | | | | Maintained |
|------------|------------------|-------------------|------------------|------------------|------------------|------------------|---------------|---------------------------|
| | | Operator Position | | | | | | Part Number |
| | | 1 | 2 | 3 | 4 | 5 | | |
| 2NO 2NC | 1 2 3 4 | X 0 0 0 | 0 X 0 0 | 0 0 0 0 | 0 X 0 0 | 0 0 0 X | Knob Lever | ASW522-501 ASW5L22-501 |

Non-Illuminated Selector Switches (Sub-Assembled)



- 1. *Not needed with key type switches.
- 2. †Knob type shown.

Operators

| Style | Positions | Description | Part Number | |
|---|--------------------------|--|--|-------------------------------------|
| Knob/Lever  | 2 | Maintained | ASW200 | |
| | | Spring return from right | ASW2100 | |
| | | Spring return from left | ASW2200 | |
| | 3 | Maintained, Cam 1 Maintained, Cam 2 Maintained, Cam 3 | | ASW300-1 ASW300-2 ASW300-3 |
| | | | Spring return from right, Cam 1 Spring return from right, Cam 2 | ASW3100-1 ASW3100-2 |
| | | | Spring return from left, Cam 1 Spring return from left, Cam 2 | ASW3200-1 ASW3200-2 |
| | | Spring return from left/right, Cam 1 Spring return from left/right, Cam 2 | ASW3300-1 ASW3300-2 | |
| | | 4 | Maintained, Standard Cam | ASW400 |
| | | | Maintained, Cam 1 | ASW400-1 |
| 5 | Maintained, Standard cam | ASW500 | | |
| | Maintained, Cam 1 | ASW500-1 | | |
| Key  | 2 | Maintained | ASW2K00 | |
| | | Spring return from right | ASW21K00 | |
| | | Spring return from left | ASW22K00 | |
| | 3 | Maintained, Cam 1 Maintained, Cam 2 Maintained, Cam 3 | | ASW3K00-1 ASW3K00-2 ASW3K00-3 |
| | | | Spring return from right, Cam 1 Spring return from right, Cam 2 | ASW31K00-1 ASW31K00-2 |
| | | | Spring return from left, Cam 1 Spring return from left, Cam 2 | ASW32K00-1 ASW32K00-2 |
| | | Spring return from left/right, Cam 1 Spring return from left/right, Cam 2 | ASW33K00-1 ASW33K00-2 | |

- 1. Two keys are supplied with every key switch, all are keyed alike, and removable from any maintained position.
- 2. Locking rings are included with all operators. Order knobs, levers, and color inserts separately.
- 3. Different cams produce different contact actions. For details, see page 720.
- 4. Key switch operator supplied with black sleeve.

① Handle/Insert Color Codes

| Color | Code |
|--------|------|
| Black* | B |
| Blue | S |
| Green | G |
| Red | R |
| Yellow | Y |
| White† | W |

- *Color inserts not available in black.
- †Knob and lever not available in white.

Replacement Parts

| | |
|-------------------------|---------|
| Key Switch Black Sleeve | AKW2B-B |
|-------------------------|---------|

Handles and Inserts

| Style | Part Number |
|--|-------------|
| Knob  | ASWHHY-① |
| Lever  | ASWHHL-① |
| Color Insert  | TW-HC1-① |

Contact Blocks

| Style | Contacts | 1NO | 1NC |
|---|--------------------------------------|---------------------------|---------------------------|
|  | Finger-Safe Spring-Up Terminal | HW-U10-F | HW-U01-F |
|  | | HW-U10R-F (early make) | HW-U01R-F (late break) |
|  | Dummy Block | HW-DB | |

- 1. Push rod color code:
Green = NO contact block
Red = NC contact block.
- 2. Dummy blocks (no contacts) are used with an odd number of contact blocks.

Illuminated Selector Switches (Assembled)



Assembled Illuminated Selector Switches

A SL W 2 (2) 99 11 (D) - (103) - R - (24V)

Function

SL: Illuminated Selector Switch

Series Designation

W: TW series

Number of Positions

2: 2-Position
3: 3-Position

Spring Return Action

Blank: Maintained
1: Spring return from Right
2: Spring return from Left
3: Two-Way spring return from Left and Right

Illumination Circuit

99: Full Voltage (lamp determines voltage)
126: 120V AC Step Down Transformer
246: 240V AC Step Down Transformer
486: 480V AC Step Down Transformer

Lamp Voltage

(Full Voltage Units Only)

6V: 6V AC/DC
12V: 12V AC/DC
24V: 24V AC/DC
120V: 120V AC
240V: 240V AC

Lens Color Code

A: Amber
G: Green
R: Red
S: Blue
W: White
Y: Yellow

Contact Circuit Number

Standard circuits are listed on the following pages and 720.

Lamp Type

D: LED Lamp

Contact Arrangement

| | |
|-------------|-------------|
| 10: 1NO | 01: 1NC |
| 20: 2NO | 02: 2NC |
| 40: 4NO | 04: 4NC |
| 11: 1NO-1NC | 22: 2NO-2NC |

1. Use only when interpreting part numbers. Do not use for developing part numbers.
2. All transformers step down to 6V (use 6V lamp).

Illuminated Selector Switches(Assembled) continued

Illuminated 2-Position Selector Switches

| Style | | | | Lamp Circuit Type | Part Number | | |
|------------|------------------|-------------------|------------------|-----------------------------|---|---|---|
| Contact | Mounting | Operator Position | | | Maintained | Spring Return from Right | Spring Return from Left |
| | | L | R | | | | |
| 1NO 1NC | 1 2 | 0 X | X 0 | Transformer Full Voltage | ASLW2 ① 11D-② ASLW29911D-②-③ | ASLW21 ① 11D-② ASLW219911D-②-③ | ASLW22 ① 11D-② ASLW229911D-②-③ |
| 2NO | 1 2 | 0 0 | X X | Transformer Full Voltage | ASLW2 ① 20D-② ASLW29920D-②-③ | ASLW21 ① 20D-② ASLW219920D-②-③ | ASLW22 ① 20D-② ASLW229920D-②-③ |
| 2NC | 1 2 | X X | 0 0 | Transformer Full Voltage | ASLW2 ① 02D-104-② ASLW29902D-104-②-③ | ASLW21 ① 02D-104-② ASLW219902D-104-②-③ | ASLW22 ① 02D-104-② ASLW229902D-104-②-③ |
| 2NO 2NC | 1 2 3 4 | 0 X 0 X | X 0 X 0 | Transformer Full Voltage | ASLW2 ① 22D-② ASLW29922D-②-③ | ASLW21 ① 22D-② ASLW219922D-②-③ | ASLW22 ① 22D-② ASLW229922D-②-③ |

① Transformer Voltage Codes

| Voltage | Code |
|---------|------|
| 120VAC | 126 |
| 240VAC | 246 |
| 480VAC | 486 |

Transformers step down to 6V (use 6V LED).

② LED/Lens Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

Illuminated 3-Position Selector Switches, Maintained and Spring Return from Right

| Style | | | | | Lamp Circuit Type | Part Number | | | |
|------------|------------------|-------------------|------------------|------------------|-----------------------------|---|---|---|---|
| Contact | Mounting | Operator Position | | | | Maintained | Spring Return From Right | Spring Return from Left | Spring Return Two-Way |
| | | L | C | R | | | | | |
| 2NO | 1 2 | X 0 | 0 0 | 0 X | Transformer Full Voltage | ASLW3 ① 20D-② ASLW39920D-②-③ | ASLW31 ① 20D-② ASLW319920D-②-③ | ASLW32 ① 20D-② ASLW329920D-②-③ | ASLW33 ① 20D-② ASLW339920D-②-③ |
| 2NC | 1 2 | 0 X | X X | X 0 | Transformer Full Voltage | ASLW3 ① 02D-② ASLW39902D-②-③ | ASLW31 ① 02D-② ASLW319902D-②-③ | ASLW32 ① 02D-② ASLW329902D-②-③ | ASLW33 ① 02D-② ASLW339902D-②-③ |
| 2NO 2NC | 1 2 3 4 | X 0 0 X | 0 0 X X | 0 X X 0 | Transformer Full Voltage | ASLW3 ① 22D-② ASLW39922D-②-③ | ASLW31 ① 22D-② ASLW319922D-②-③ | ASLW32 ① 22D-② ASLW329922D-②-③ | ASLW33 ① 22D-② ASLW339922D-②-③ |
| 2NO 2NC | 1 2 3 4 | X X 0 0 | 0 X X 0 | X 0 0 X | Transformer Full Voltage | ASLW3 ① 22D-309-② ASLW39922D-309-②-③ | ASLW31 ① 22D-309-② ASLW319922D-309-②-③ | ASLW32 ① 22D-309-② ASLW329922D-309-②-③ | ASLW33 ① 22D-309-② ASLW339922D-309-②-③ |
| 2NO 2NC | 1 2 3 4 | 0 0 0 0 | X 0 X 0 | 0 X 0 X | Transformer Full Voltage | ASLW3 ① 22D-310-② ASLW39922D-310-②-③ | ASLW31 ① 22D-310-② ASLW319922D-310-②-③ | ASLW32 ① 22D-310-② ASLW329922D-310-②-③ | ASLW33 ① 22D-310-② ASLW339922D-310-②-③ |
| 4NO | 1 2 3 4 | X 0 X 0 | 0 0 0 0 | 0 X 0 X | Transformer Full Voltage | ASLW3 ① 40D-② ASLW39940D-②-③ | ASLW31 ① 40D-② ASLW319940D-②-③ | ASLW32 ① 40D-② ASLW329940D-②-③ | ASLW33 ① 40D-② ASLW339940D-②-③ |
| 4NC | 1 2 3 4 | 0 X 0 X | X X X X | X 0 X 0 | Transformer Full Voltage | ASLW3 ① 04D-② ASLW39904D-②-③ | ASLW31 ① 04D-② ASLW319904D-②-③ | ASLW32 ① 04D-② ASLW329904D-②-③ | ASLW33 ① 04D-② ASLW339904D-②-③ |

- 1. In place of ①, specify the Transformer Voltage Code.
- 2. In place of ②, specify the Lens/LED Color Code.
- 3. In place of ③, specify the Full Voltage Code.
- 4. For custom contact configurations, see page 720.
- 5. Light is independent of switch position.
- 6. Yellow selector switch comes with white LED.

③ Full Voltage Codes

| Voltage | Code |
|-----------|------|
| 6V AC/DC | 6V |
| 12V AC/DC | 12V |
| 24V AC/DC | 24V |
| 120V AC | 120V |
| 240V AC | 240V |

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors


Terminal Blocks

Circuit Breakers



Illuminated Selector Switches (Sub-Assembled)


Transformer* + Contact Block + Operator + Lamp/Lead Holder¹ + LED + Lens = Complete Part



 *Full voltage units use a full voltage adaptor TW-DA1FB (even number of blocks) OR HW-DA1FBN (odd number of blocks) instead of a transformer.
¹Lamp holder is not included with operators, order separately.


Operators

| Style | Positions | Description | Part Number |
|--|--------------------------------------|--------------------------|-------------|
|  | 2 | Maintained | ASLW200 |
| | | Spring return from right | ASLW2100 |
| | | Spring return from left | ASLW2200 |
|  | 3 | Maintained, cam 1 | ASLW300-1 |
| | | Maintained, cam 2 | ASLW300-2 |
| | | Maintained, cam 3 | ASLW300-3 |
| | Spring return from right, cam 1 | ASLW3100-1 | |
| | Spring return from right, cam 2 | ASLW3100-2 | |
| | Spring return from left, cam 1 | ASLW3200-1 | |
| | Spring return from left, cam 2 | ASLW3200-2 | |
| | Spring return from left/right, cam 1 | ASLW3300-1 | |
| Spring return from left/right, cam 2 | ASLW3300-2 | | |


 Different cams produce different contact action. For details, see Contact Arrangements on page 720.


Lenses (Knobs)

| Style | Part Number |
|--|-------------|
| Knob   | ASLWLU-② |

 In place of ②, specify the lens color code from table.


Lamps

| Style | Voltage | Part Number |
|---|-----------|-------------|
|  | 6V AC/DC | LSTD-6② |
| | 12V AC/DC | LSTD-1② |
| | 24V AC/DC | LSTD-2② |
| | 120V AC | LSTD-H2② |
| | 240V AC | LSTD-M4② |

 1. In place of ②, specify the LED color code.
 2. The LED contains a current-limiting resistor and a protection diode.



② LED/Lens Color Codes

| Color | Code |
|--------|------|
| Amber | A |
| Green | G |
| Red | R |
| Blue | S |
| White | W |
| Yellow | Y |

 Yellow LED not available. Use white LED

Illuminated Selector Switches (Sub-Assembled) continued

Contact Blocks

| Style | Contacts | 1NO | 1NC |
|---|--------------------------------|------------------------|------------------------|
|  | Finger-Safe Spring-Up Terminal | HW-U10-F | HW-U01-F |
| | | HW-U10R-F (early make) | HW-U01R-F (late break) |
|  | Dummy Block | HW-DB | |


- 1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
- 2. Use of early and late break contacts creates a make before break function

Lamp Circuit Components

| Style | Application | Part Number |
|--|---|-------------|
| Short Lamp Holder  | Used with full voltage adaptor and one contact block | TW-LH1 |
| Long Lamp Holder  | Used with Full-size Transformer and two contact blocks | TW-LH2 |
| Lead Holder  | Used with TW-LH2 holder when using four contact blocks and full size transformer | HW-LH3 |

Transformers/Full Voltage Modules


| Style | Description | Part Number |
|---|---|-------------|
| Full Size Transformer  | 120V AC | TW-F126B |
| | 240V AC | TW-F246B |
| | 480V AC | TW-F486B |
| Dummy Block with Full Voltage Adaptor |  For use with odd number of contacts. Finger-Safe | HW-DA1FBN |
| Full Voltage Adaptor |  For use with even number of contacts. Finger-Safe | TW-DA1FB |

 All Transformers step down to 6V (use 6V lamp).

Contact Arrangement Charts

How to Read Contact Arrangement Charts

To determine contact block mounting position, first make sure the selector switch is oriented as shown on the right



Contact Arrangement

Type and quantity of switch contacts

Circuit Number

* N/D = No designation required

Contact Block Mounting Position

Position or mounting contact blocks on operator.

Operator Position

Truth table indicates the operating position of contact block when operator is switched to that position (X - closed, O - open).

Contact Block Part Number

Part number to use when ordering sub-assembly contact blocks, as required for use with corresponding mounting position

Contact Arrangement Chart: 2-Position Selector Switches

| Style | | Mounting Position | Operator Position | | Contact Block Part Number | Description | Operator Part Number | | |
|------------------|----------------|-------------------|-------------------|---|---------------------------|------------------------------------|------------------------------|---------------------------------|---------------------------------|
| Contact | Circuit Number | | L | R | | | Maintained | Spring Ret. from Rt. | Spring Ret. from Lt. |
| | | | | | | | L R | L R | L R |
| 1NO | N/D | 1 | 0 | X | HW-U10-F | Knob/Lever Key | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | 0 | 0 | HW-DB | Illuminated Knob | | | |
| 1NC | 116 | 1 | X | 0 | HW-U01-F | Knob/Lever Key | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | 0 | 0 | HW-DB | Illuminated Knob | | | |
| 1NO 1NC | N/D | 1 | 0 | X | HW-U10-F | Knob/Lever Key | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | X | 0 | HW-U01-F | Illuminated Knob | | | |
| 1NO-EM 1NC-LB | 103 | 1 | X | 0 | HW-U01-F | Knob/Lever Key | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | 0 | X | HW-U10-F | Illuminated Knob | | | |
| 1NO-EM 1NC-LB | 600 | 1 | 0 | X | HW-U10R-F | Knob/Lever Key | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | X | 0 | HW-U01R-F | Illuminated Knob | | | |
| 1NO-EM 1NC-LB | 601 | 1 | X | 0 | HW-U01R-F | Knob/Lever Key | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | 0 | X | HW-U10R-F | Illuminated Knob | | | |
| 2NO | N/D | 1 | 0 | X | HW-U10-F | Knob/Lever Key | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | 0 | X | HW-U10-F | Illuminated Knob | | | |
| 2NC | 104 | 1 | X | 0 | HW-U01-F | Knob/Lever Key | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | X | 0 | HW-U01-F | Illuminated Knob | | | |
| 2NO 2NC | N/D | 1 | 0 | X | HW-U10-F | Knob/Lever Key Illuminated Knob | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | X | 0 | HW-U01-F | | | | |
| | | 3 | 0 | X | HW-U10-F | | | | |
| | | 4 | X | 0 | HW-U01-F | | | | |
| 2NO 2NC | 111 | 1 | 0 | X | HW-U10-F | Knob/Lever Key Illuminated Knob | ASW200 ASW2K00 ASLW200 | ASW2100 ASW21K00 ASLW2100 | ASW2200 ASW22K00 ASLW2200 |
| | | 2 | 0 | X | HW-U10-F | | | | |
| | | 3 | X | 0 | HW-U01-F | | | | |
| | | 4 | X | 0 | HW-U01-F | | | | |

1. NO-EM, NC-LB = Early Make, Late Break.
N/D = No circuit number designation required in assembled selector switch part number.
2. X = On (closed contacts) O = Off (Open contacts)

Contact Arrangement Chart: 3-Position Selector Switches

| Style | | Mounting Position | Operator Position | | | Contact Block Part Number | Description | Operator Part Number | | | |
|------------|----------------|-------------------|-------------------|---|----------|------------------------------------|------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Contact | Circuit Number | | L | C | R | | | Maintained | Spring Return from Right | Spring Return from Left | Two-Way |
| | | | | | | | | | | | |
| 1NO 1NC | 202 | 1 | X | 0 | 0 | HW-U10-F | Knob/Lever Key | ASW300-1 ASW3K00-1 ASLW300-1 | ASW3100-1 ASW31K00-1 ASLW3100-1 | ASW3200-1 ASW32K00-1 ASLW3200-1 | ASW3300-1 ASW33K00-1 ASLW3300-1 |
| | | 2 | X | X | 0 | HW-U01-F | Illuminated Knob | | | | |
| | 203 | 1 | 0 | X | X | HW-U01-F | Knob/Lever Key | ASW300-1 ASW3K00-1 ASLW300-1 | ASW3100-1 ASW31K00-1 ASLW3100-1 | ASW3200-1 ASW32K00-1 ASLW3200-1 | ASW3300-1 ASW33K00-1 ASLW3300-1 |
| | | 2 | 0 | 0 | X | HW-U10-F | Illuminated Knob | | | | |
| | 302 | 1 | X | 0 | X | HW-U10-F | Knob/Lever Key | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 |
| | | 2 | X | X | 0 | HW-U01-F | Illuminated Knob | | | | |
| 303 | 1 | 0 | X | 0 | HW-U01-F | Knob/Lever Key | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 | |
| | 2 | 0 | 0 | X | HW-U10-F | Illuminated Knob | | | | | |
| 2NO | N/D | 1 | X | 0 | 0 | HW-U10-F | Knob/Lever Key | ASW300-1 ASW3K00-1 ASLW300-1 | ASW3100-1 ASW31K00-1 ASLW3100-1 | ASW3200-1 ASW32K00-1 ASLW3200-1 | ASW3300-1 ASW33K00-1 ASLW3300-1 |
| | | 2 | 0 | 0 | X | HW-U10-F | Illuminated Knob | | | | |
| | 301 | 1 | X | 0 | X | HW-U10-F | Knob/Lever Key | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 |
| | | 2 | 0 | 0 | X | HW-U10-F | Illuminated Knob | | | | |
| 2NC | 304 | 1 | 0 | X | 0 | HW-U01-F | Knob/Lever Key | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 |
| | | 2 | X | X | 0 | HW-U01-F | Illuminated Knob | | | | |
| | N/D | 1 | 0 | X | X | HW-U01-F | Knob/Lever Key | ASW300-1 ASW3K00-1 ASLW300-1 | ASW3100-1 ASW31K00-1 ASLW3100-1 | ASW3200-1 ASW32K00-1 ASLW3200-1 | ASW3300-1 ASW33K00-1 ASLW3300-1 |
| | | 2 | X | X | 0 | HW-U01-F | Illuminated Knob | | | | |
| 2NO 2NC | N/D | 1 | X | 0 | 0 | HW-U10-F | Knob/Lever Key Illuminated Knob | ASW300-1 ASW3K00-1 ASLW300-1 | ASW3100-1 ASW31K00-1 ASLW3100-1 | ASW3200-1 ASW32K00-1 ASLW3200-1 | ASW3300-1 ASW33K00-1 ASLW3300-1 |
| | | 2 | 0 | 0 | X | HW-U10-F | | | | | |
| | | 3 | 0 | X | X | HW-U01-F | | | | | |
| | | 4 | X | X | 0 | HW-U01-F | | | | | |
| | 210 | 1 | 0 | X | X | HW-U01-F | Knob/Lever Key Illuminated Knob | ASW300-1 ASW3K00-1 ASLW300-1 | ASW3100-1 ASW31K00-1 ASLW3100-1 | ASW3200-1 ASW32K00-1 ASLW3200-1 | ASW3300-1 ASW33K00-1 ASLW3300-1 |
| | | 2 | 0 | 0 | X | HW-U10-F | | | | | |
| | | 3 | 0 | X | X | HW-U01-F | | | | | |
| | | 4 | 0 | 0 | X | HW-U10-F | | | | | |
| | 308 | 1 | X | 0 | X | HW-U10-F | Knob/Lever Key Illuminated Knob | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 |
| | | 2 | X | X | 0 | HW-U01-F | | | | | |
| | | 3 | X | 0 | X | HW-U10-F | | | | | |
| | | 4 | X | X | 0 | HW-U01-F | | | | | |
| 309 | 1 | X | 0 | X | HW-U10-F | Knob/Lever Key Illuminated Knob | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 | |
| | 2 | X | X | 0 | HW-U01-F | | | | | | |
| | 3 | 0 | X | 0 | HW-U01-F | | | | | | |
| | 4 | 0 | 0 | X | HW-U10-F | | | | | | |
| 310 | 1 | 0 | X | 0 | HW-U01-F | Knob/Lever Key Illuminated Knob | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 | |
| | 2 | 0 | 0 | X | HW-U10-F | | | | | | |
| | 3 | 0 | X | 0 | HW-U01-F | | | | | | |
| | 4 | 0 | 0 | X | HW-U10-F | | | | | | |

1. Each operator sub-assembly is available as a "-1" and a "-2" for 3-position selector switches. The internal cam of a "-1" is different from that of a "-2". This results in designated combinations of open and closed contacts in the various operator positions.
2. N/D = No circuit number designation required in assembled part number.
3. X = On (closed contacts) 0 = Off (open contacts). X-X Overlapping contacts remain on (closed) when switch is moved between these two positions.

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors

Terminal Blocks

Circuit Breakers

Contact Arrangement Chart: 3-Position Selector Switches

| Style | | Mounting Position | Operator Position | | | Contact Block Part Number | Description | Operator Part Number | | | |
|---------|----------------|-------------------|-------------------|---|---|---------------------------|------------------------------------|------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Contact | Circuit Number | | L | C | R | | | Maintained | Spring Return from Right | Spring Return from Left | Two-Way |
| | | | | | | | | | | | |
| 4NO | N/D | 1 | X | 0 | 0 | HW-U10-F | Knob/Lever Key Illuminated Knob | ASW300-1 ASW3K00-1 ASLW300-1 | ASW3100-1 ASW31K00-1 ASLW3100-1 | ASW3200-1 ASW32K00-1 ASLW3200-1 | ASW3300-1 ASW33K00-1 ASLW3300-1 |
| | | 2 | 0 | 0 | X | HW-U10-F | | | | | |
| | | 3 | X | 0 | 0 | HW-U10-F | | | | | |
| | | 4 | 0 | 0 | X | HW-U10-F | | | | | |
| | 305 | 1 | X | 0 | X | HW-U10-F | Knob/Lever Key Illuminated Knob | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 |
| | | 2 | 0 | 0 | X | HW-U10-F | | | | | |
| | | 3 | X | 0 | X | HW-U10-F | | | | | |
| | | 4 | 0 | 0 | X | HW-U10-F | | | | | |
| 4NC | N/D | 1 | 0 | X | X | HW-U01-F | Knob/Lever Key Illuminated Knob | ASW300-1 ASW3K00-1 ASLW300-1 | ASW3100-1 ASW31K00-1 ASLW3100-1 | ASW3200-1 ASW32K00-1 ASLW3200-1 | ASW3300-1 ASW33K00-1 ASLW3300-1 |
| | | 2 | X | X | 0 | HW-U01-F | | | | | |
| | | 3 | 0 | X | X | HW-U01-F | | | | | |
| | | 4 | X | X | 0 | HW-U01-F | | | | | |
| | 314 | 1 | 0 | X | 0 | HW-U01-F | Knob/Lever Key Illuminated Knob | ASW300-2 ASW3K00-2 ASLW300-2 | ASW3100-2 ASW31K00-2 ASLW3100-2 | ASW3200-2 ASW32K00-2 ASLW3200-2 | ASW3300-2 ASW33K00-2 ASLW3300-2 |
| | | 2 | X | X | 0 | HW-U01-F | | | | | |
| | | 3 | 0 | X | 0 | HW-U01-F | | | | | |
| | | 4 | X | X | 0 | HW-U01-F | | | | | |

- 1. Each operator sub-assembly is available as a "-1" and a "-2" for 3-position selector switches. The internal cam of a "-1" is different from that of a "-2". This results in designated combinations of open and closed contacts in the various operator positions.
- 2. N/D = No circuit number designation required in assembled part number.
- 3. X = On (closed contacts) 0 = Off (open contacts). X-X Overlapping contacts remain on (closed) when switch is moved between these two positions.

Custom Selector Switch Building Guide

To build a custom selector switch, follow these steps.

Step 1

How many positions of the switch are needed?

of positions
(2, 3, 4, 5)

Step 2

How many contacts should there be?

of isolated contacts
(maximum 6)

Step 3

Fill in the Truth Table

(X = closed, 0 = open)

| | | Knob Position | | | | |
|----------|---|---------------|---|---|---|---|
| | | 1 | 2 | 3 | 4 | 5 |
| Contacts | 1 | | | | | |
| | 2 | | | | | |
| | 3 | | | | | |
| | 4 | | | | | |
| | 5 | | | | | |
| | 6 | | | | | |

Step 4

If building a 2 position selector, skip this step. (2 position selectors have only one cam)

If building a 3, 4, or 5 position selector, determine appropriate cam as follows:

- Look at Row 1 from above table and locate an identical row in the operator truth tables (See next page).
- Repeat for all rows. The user must find one operator that contains all rows from above table.
- Record the operator cam version.


Step 5


Build by placing appropriate contact in appropriate mounting position for each desired row on operator cam truth table. "L" and "R" refer to mounting on left or right side of operator as viewed from the front of the panel.

Step 6

Develop an assembly part number (if necessary) as follows: follow standard numbering nomenclature for selector switches (see pages 712 or 716. In place of the "Circuit Number" indicate the cam number and contact arrangement as such ASW322-3-OELCXX, where "3" is the cam number, and contact arrangement "OELCXX" calls out individual contact mounting locations in order (see diagram above). O=NO, C=NC, E=NO-EM, L=NC-LB, X= no contact. Part number must designate all 6 possible mounting locations.

Mounting Positions

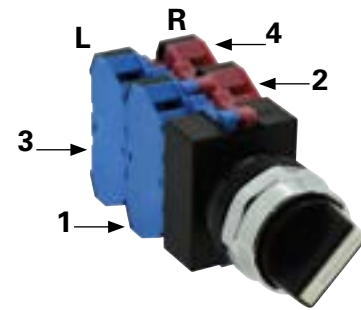

 Caution: Before putting any custom selector switch into use, the user should use an ohmmeter to test for desired performance.
1. For Operator Truth Tables, see next page.

Operator Truth Tables

Use the following tables to build custom selector switches.

2 Position Selector Switches

| | Contact | Mounting Position | Operator Position | |
|------------------------------|-------------------|-------------------|-------------------|--------------|
| | | | Left | Right |
| | | | | |
| ASW200 ASLW200 ASW2K00 | HW-U10-F (NO) | L | 0 | X |
| | | R | 0 | X |
| | HW-U01-F (NC) | L | X | 0 |
| | | R | X | 0 |
| | HW-U10R-F (NO-EM) | L | 0 | X |
| | | R | 0 | X |
| | HW-U01R-F (NC-LB) | L | X | 0 |
| | | R | X | 0 |

3 Position Selector Switches

| | Contact | Mounting Position | Operator Position | | |
|------------------------------------|-------------------|-------------------|-------------------|--------------|--------------|
| | | | Left | Center | Right |
| | | | | | |
| ASW300-1 ASW3K00-1 ASLW300-1 | HW-U10-F (NO) | L | X | 0 | 0 |
| | | R | 0 | 0 | X |
| | HW-U01-F (NC) | L | 0 | X | X |
| | | R | X | X | 0 |
| | HW-U10R-F (NO-EM) | L | X | 0 | 0 |
| | | R | 0 | 0 | X |
| | HW-U01R-F (NC-LB) | L | 0 | X | X |
| | | R | X | X | 0 |

| | Contact | Mounting Position | Operator Position | | |
|------------------------------------|-------------------|-------------------|-------------------|--------------|--------------|
| | | | Left | Center | Right |
| | | | | | |
| ASW300-2 ASW3K00-2 ASLW300-2 | HW-U10-F (NO) | L | X | 0 | X |
| | | R | 0 | 0 | X |
| | HW-U01-F (NC) | L | 0 | X | 0 |
| | | R | X | X | 0 |
| | HW-U10R-F (NO-EM) | L | X | 0 | X |
| | | R | 0 | 0 | X |
| | HW-U01R-F (NC-LB) | L | 0 | X | 0 |
| | | R | X | X | 0 |

| | Contact | Mounting Position | Operator Position | | |
|------------------------------------|-------------------|-------------------|-------------------|--------------|--------------|
| | | | Left | Center | Right |
| | | | | | |
| ASW300-3 ASW3K00-3 ASLW300-3 | HW-U10-F (NO) | L | X | 0 | 0 |
| | | R | 0 | 0 | X |
| | HW-U01-F (NC) | L | 0 | X | 0 |
| | | R | 0 | X | 0 |
| | HW-U10R-F (NO-EM) | L | X | 0 | X |
| | | R | X | 0 | X |
| | HW-U01R-F (NC-LB) | L | 0 | X | X |
| | | R | X | X | 0 |

4 Position Selector Switches

| | Contact | Mounting Position | Operator Position | | | |
|--------|-------------------|-------------------|-------------------|--------------|--------------|--------------|
| | | | 1 | 2 | 3 | 4 |
| | | | | | | |
| ASW400 | HW-U10-F (NO) | L | X | 0 | 0 | 0 |
| | | R | 0 | X | 0 | 0 |
| | HW-U01-F (NC) | L | 0 | X | X | X |
| | | R | X | 0 | X | X |
| | HW-U10R-F (NO-EM) | L | X | 0 | 0 | 0 |
| | | R | 0 | X | 0 | 0 |
| | HW-U01R-F (NC-LB) | L | 0 | X | X | X |
| | | R | X | 0 | X | X |

| | Contact | Mounting Position | Operator Position | | | |
|----------|-------------------|-------------------|-------------------|--------------|--------------|--------------|
| | | | 1 | 2 | 3 | 4 |
| | | | | | | |
| ASW400-1 | HW-U10-F (NO) | L | X | 0 | 0 | 0 |
| | | R | 0 | 0 | 0 | X |
| | HW-U01-F (NC) | L | 0 | 0 | X | 0 |
| | | R | 0 | X | 0 | 0 |
| | HW-U10R-F (NO-EM) | L | X | X | 0 | X |
| | | R | X | 0 | X | X |
| | HW-U01R-F (NC-LB) | L | 0 | X | X | X |
| | | R | X | X | X | 0 |

5 Position Selector Switches

| | Contact | Mounting Position | Operator Position | | | | |
|--------|-------------------|-------------------|-------------------|--------------|--------------|--------------|--------------|
| | | | 1 | 2 | 3 | 4 | 5 |
| | | | | | | | |
| ASW500 | HW-U10-F (NO) | L | X | 0 | 0 | 0 | 0 |
| | | R | 0 | X | 0 | 0 | 0 |
| | HW-U01-F (NC) | L | 0 | 0 | X | X | X |
| | | R | 0 | 0 | 0 | X | X |
| | HW-U10R-F (NO-EM) | L | X | 0 | 0 | 0 | 0 |
| | | R | 0 | X | 0 | 0 | 0 |
| | HW-U01R-F (NC-LB) | L | 0 | X | X | X | X |
| | | R | X | 0 | X | X | X |

| | Contact | Mounting Position | Operator Position | | | | |
|----------|-------------------|-------------------|-------------------|--------------|--------------|--------------|--------------|
| | | | 1 | 2 | 3 | 4 | 5 |
| | | | | | | | |
| ASW500-1 | HW-U10-F (NO) | L | X | 0 | 0 | 0 | 0 |
| | | R | 0 | 0 | 0 | 0 | X |
| | HW-U01-F (NC) | L | 0 | 0 | 0 | X | 0 |
| | | R | 0 | X | 0 | 0 | 0 |
| | HW-U10R-F (NO-EM) | L | X | X | X | 0 | X |
| | | R | X | 0 | X | X | X |
| | HW-U01R-F (NC-LB) | L | 0 | X | X | X | X |
| | | R | X | X | X | X | 0 |

Nameplates – TW Series

Faceplates

| | NWAL | NWAQL | NWAS | EMERGENCY STOP |
|----------------------|----------------------------------|------------------------------------|---------|----------------|
| | | | | |
| | Part Number | | | |
| Nameplate (blank) | NWAL-OB (black) NWAL-OR (red) | NWAQL-OB (black) NWAQL-OR (red) | NWAS-OB | NWAR-0 |
| Nameplate (engraved) | NWAL-⓪ | NWAQL-⓪ | NWAS-⓪ | NWAR-27† |

- 1. In place of ⓪, insert either the Standard Legend Code from table below or custom engraving delimited by " ".
- 2. Standard engravings are available at no charge.
- 3. NWAR-27 comes marked "Emergency Stop" as shown in drawing.

Standard Legend Codes

| Pushbuttons | | | | Pushbuttons/Selector Switches | | | | Selector Switches | |
|-------------|------|---------------|------|-------------------------------|------|------------|------|-------------------|------|
| Legend | Code | Legend | Code | Legend | Code | Legend | Code | Legend | Code |
| AUTO | 101 | OPEN | 116 | AUTO-MAN | 201 | | | AUTO-MAN-OFF | 301 |
| CLOSE | 102 | OUT | 117 | CLOSE-OPEN | 202 | | | AUTO-OFF-MAN | 302 |
| DOWN | 103 | RAISE | 118 | DOWN-UP | 203 | | | CLOSE-OFF-OPEN | 303 |
| EMERG.STOP | 104 | RESET | 119 | FAST-SLOW | 204 | | | DOWN-OFF-SLOW | 304 |
| FAST | 105 | REVERSE | 120 | FOR-REV | 205 | REV-FOR | 216 | FAST-OFF-SLOW | 305 |
| FORWARD | 106 | RUN | 121 | HAND-AUTO | 206 | RUN-JOG | 217 | FOR-OFF-REV | 306 |
| HAND | 107 | SLOW | 122 | HIGH-LOW | 207 | RUN-SAFE | 218 | LEFT-OFF-RIGHT | 307 |
| HIGH | 108 | START | 123 | JOG-RUN | 208 | SAFE-RUN | 219 | LOWER-OFF-RAISE | 308 |
| IN | 109 | STOP | 124 | LEFT-RIGHT | 209 | SLW-FAST | 220 | OFF-MAN-AUTO | 309 |
| INCH | 110 | STOP | 125 | LOWER-RAISE | 210 | START-STOP | 221 | OFF-SLOW-FAST | 310 |
| JOG | 111 | TEST | 126 | MAN-AUTO | 211 | STOP-START | 222 | OFF-1-2 | 311 |
| LOW | 112 | UP | 127 | OFF-ON | 212 | UP-DOWN | 223 | OPEN-OFF-CLOSE | 312 |
| LOWER | 113 | I (Int'l On) | 150 | ON-OFF | 213 | | | SLOW-OFF-FAST | 313 |
| OFF | 114 | O (Int'l Off) | 151 | OPEN-CLOSE | 214 | | | SUMMER-OFF-WINTER | 314 |
| ON | 115 | EMO | 152 | RAISE-LOWER | 215 | | | UP-OFF-DOWN | 315 |
| | | | | | | | | 1-OFF-2 | 316 |
| | | | | | | | | HAND-OFF-AUTO | 317 |

- 1. To order engraved nameplates, add legend code to nameplate part number. Character height based on the number of characters and size of nameplate. Standard character size is 3/16".
- 2. Nameplates with standard legends are the same list price as blank nameplates.


Nameplate Order Form on next page.

Custom Engraved Nameplates Order Form – TW Series

Copy this order form and use it to specify Letter Height, Custom Engravings, Location of Engraving on Nameplate, and Quantity Desired. To ensure engraving accuracy, fax it to your IDEC representative. or Distributor.

Your Company Name: _____ IDEC Rep/Distributor Contact: _____
 Your Name: _____ PO number (if known): _____
 Telephone: _____ IDEC Rep/Distributor Phone: _____
 Fax & Email: _____ IDEC Rep/Distributor Fax & Email: _____

NWAL



Step 1.

Choose Letter Size - 7/64" or 1/8".

Check the box for the letter size you want. Then write your lettering in box below checkboxes. Note: 1/8" size letters cannot exceed 9 characters.

7/64"
Letter Size

11 characters max
(for 7/64" size letters)

1/8"
Letter Size

9 characters max
(for 1/8" size letters)

Step 2.

Specify Quantity.

Enter the number of nameplates desired in the box on the right.

Qty


1 2 3 4 5 6 7 8 9 10 11

Sample Letter Sizes

7/64" Letters: A B C D

1/8" Letters: A B C D

NWAQL



Step 1.

Choose Letter Size - 7/64" or 1/8".

Check the box for the letter size you want. Then write your lettering in box below checkboxes. Note: 1/8" size letters cannot exceed 9 characters.

7/64"
Letter Size

11 characters max
(for 7/64" size letters)

1/8"
Letter Size

9 characters max
(for 1/8" size letters)

Step 2.

Specify Quantity.

Enter the number of nameplates desired in the box on the right.

Qty


1 2 3 4 5 6 7 8 9 10 11

Sample Letter Sizes

7/64" Letters: A B C D

1/8" Letters: A B C D

NWAS



Step 1.

Choose Letter Size - 1/8" or 3/32".

Check the box for the letter size you want. Then write your lettering in box below checkboxes. Note: 1/8" size letters cannot exceed 14 characters.

3/32"
Letter Size

20 characters max
(for 3/32" size letters)

1/8"
Letter Size

14 characters max
(for 1/8" size letters)

Step 2.

Specify Quantity.

Enter the number of nameplates desired in the box on the right.

Qty

Step 3.

Specify Location.

Enter the location of engraving (A or B), in the box on the right.

Location

Sample Letter Sizes

3/32" Letters: A B C D

1/8" Letters: A B C D

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors

Terminal Blocks

Circuit Breakers

Switch Engraving Order Form – TW Series

Copy this order form and use it to specify Letter Height, Maximum Number of Lines and Text to be engraved.

To ensure engraving accuracy, fax it to your IDEC representative or Distributor.


Your Company: _____
 Name: _____
 Address: _____
 PO: _____

Telephone: _____
 Fax: _____
 Email: _____
 Part Number to be Engraved: _____

Please check one of the boxes below to indicate your choice of engraving options:



ø29mm, ø40mm Mushroom Head



| | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | 1 | 5/32 | 6 |
| <input type="checkbox"/> | | 1/8 | 6 |
| <input type="checkbox"/> | 2 | 5/32 | 6 |
| <input type="checkbox"/> | | 1/8 | 5 |
| <input type="checkbox"/> | 3 | 1/8 | 6 |
| <input type="checkbox"/> | 4 | 3/32 | 5 |

| | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | 1 | 5/32 | 5 |
| <input type="checkbox"/> | | 1/8 | 6 |
| <input type="checkbox"/> | 2 | 5/32 | 5 |
| <input type="checkbox"/> | | 1/8 | 6 |
| <input type="checkbox"/> | 3 | 1/8 | 5 |
| <input type="checkbox"/> | 4 | 3/32 | 5 |

| | | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | Engraving Area 1 | 1 | 5/32 | 5 |
| <input type="checkbox"/> | | | 1/8 | 5 |
| <input type="checkbox"/> | Engraving Area 2 | 1 | 5/32 | 7 |
| <input type="checkbox"/> | | | 1/8 | 7 |



- Above mentioned specifications hold true for standard size pushbuttons (round and square).
- *Engraving Area 2 can be engraved for 40mm mushroom Head non-Illuminated push button only.
- Engraving is done on the button itself for non-Illuminated push buttons and on marking plate for illuminated push buttons and pilot lights.
- Please enter text exactly how you want it engraved, take care to emphasize capital or small letters.

Enter text to be engraved:

Line 1: _____
 Line 2: _____
 Line 3: _____
 Line 4: _____

Sample Letter Sizes

1/8 Letters: **OPEN**

5/32 Letters: **OPEN**

For IDEC Internal Use Only:

Work Order #: _____

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors

Terminal Blocks

Circuit Breakers

Accessories

TW Series Accessories

| Item | Appearance | Description/Usage | | Part Number |
|--|---|---|--|-------------|
| Lamp Removal Tool |  | Rubber tool used to install or remove LED's | | OR-55 |
| Contact Block Remover |  | Used to remove contact blocks, transformers, lenses, and adaptors. Can also be used to determine panel thickness adjustment. | | TW-KC1 |
| Nut Locking Wrench |  | Used in OR-14 locking wrench to tighten locking nuts inside square bezel | | TW-KQ2 |
| Metal Bezel |  | Chrome plated bezels tighten onto operator (replacement for damaged bezels) | Standard octagonal units (chrome-pl.) | AW-R8 |
| | | | Full shroud octagonal units (chrome-pl.) | AW-RF8 |
| | | | Full shroud mushroom head units Ø 40mm | AW-G4 |
| Plastic Bezel |  | Black plastic bezels for square buttons (replacement for damaged bezels) | Round flush units (black plastic) | AW-RP1B |
| | | | Round extended units (black plastic) | AW-FP1B |
| | | | Square units (black plastic) | AW-Q1B |
| | | | Square units with full shroud (black plastic) | AW-QF1B |
| Boot/Cover |  | Used to cover and protect pushbuttons | Waterproof lens cover for square pilot lights | APW00LN |
| | | | Waterproof lens cover for square illuminated buttons | APW00L |
| | | | Clear boot for round flush units | OC-31 |
| | | | Clear boot for round extended units | OC-32 |
| | | | *In place of asterisk, specify Rubber Boot color: B (black), G (green), R (red), Y (yellow) - (nitril rubber) | OCW-11* |
| Anti-Rotation Ring |  | Ring to prevent operator base from rotating in the mounting hole. Used when nameplate is not used | | OGL-31 |
| Mounting Hole Plug |  | Black rubber plug fills unused mounting holes in panel. | | OB-31 |
| Metallic Mounting Hole Plug |  | For plugging unused mounting holes in the panel. Tighten the attached locking ring to a torque of 12 kfg-cm maximum Degree of protection: IP66 | | LW9Z-BM |
| Replacement Keys |  | Replacement keys (#0) | | TW-SK |
| Replacement Black Sleeve for Keyswitch |  | | | AKW2B-B |

| Item | Appearance | Description/Usage | | Part Number | | | | | | | | | | | | | |
|--|--|--|--|--------------|----------|----------|--------------|----------|-----------|---------------|-----------|-------------------------------|-------------------------------|---------|-------------------------------|-------------------------------|--|
| Metal Button Guard |  | Used on flush buttons to prevent inadvertent actuation | | OLW-C | | | | | | | | | | | | | |
| Terminal Tab Adaptor |  | Quick- connect terminals | #250 (17/64" x 3/64") single tab | TW-FA4 | | | | | | | | | | | | | |
| Lock-out Adaptor |  | Used to provide lock-out protection for pushbuttons and knob selector switches: • Up to Ø 40mm mushroom head size (Padlock not included.) Not applicable for e-stops. | | HW9Z-KL1 | | | | | | | | | | | | | |
| 22mm to 30mm Adaptor |  | Used to mount TW series control unit (except square units) Ø 7/8" (22mm) into a Ø 1-13/64" (30mm) panel cut-out. | | TWN-A1R8 | | | | | | | | | | | | | |
| Contact Blocks (with side entry) |  | These contacts are applicable for wires terminated by ring, fork, not recommended for bare wire connections. | <table border="1"> <thead> <tr> <th></th> <th>1NC</th> <th>1NO</th> </tr> </thead> <tbody> <tr> <td>HW-U01</td> <td>HW-U01-MAU</td> <td>HW-U10</td> </tr> <tr> <td>HW-U01R</td> <td>HW-U01R-MAU</td> <td>HW-U10R</td> </tr> <tr> <td>HW-U01R-MAU (with side entry)</td> <td>HW-U10R-MAU (with side entry)</td> <td></td> </tr> </tbody> </table> | | | | 1NC | 1NO | HW-U01 | HW-U01-MAU | HW-U10 | HW-U01R | HW-U01R-MAU | HW-U10R | HW-U01R-MAU (with side entry) | HW-U10R-MAU (with side entry) | |
| | | | | 1NC | 1NO | | | | | | | | | | | | |
| HW-U01 | HW-U01-MAU | HW-U10 | | | | | | | | | | | | | | | |
| HW-U01R | HW-U01R-MAU | HW-U10R | | | | | | | | | | | | | | | |
| HW-U01R-MAU (with side entry) | HW-U10R-MAU (with side entry) | | | | | | | | | | | | | | | | |
| Contact Blocks (without side entry) |  | These contacts are applicable for wires terminated by ring, fork, or ferule terminals, and also bare wire connections. | <table border="1"> <tbody> <tr> <td>HW-U01-F</td> <td>HW-U01-MAU-F</td> <td>HW-U10-F</td> </tr> <tr> <td>HW-U01R-F</td> <td>HW-U01R-MAU-F</td> <td>HW-U10R-F</td> </tr> <tr> <td>HW-U01R-MAU-F (no side entry)</td> <td>HW-U10R-MAU-F (no side entry)</td> <td></td> </tr> </tbody> </table> | | | HW-U01-F | HW-U01-MAU-F | HW-U10-F | HW-U01R-F | HW-U01R-MAU-F | HW-U10R-F | HW-U01R-MAU-F (no side entry) | HW-U10R-MAU-F (no side entry) | | | | |
| | | | HW-U01-F | HW-U01-MAU-F | HW-U10-F | | | | | | | | | | | | |
| HW-U01R-F | HW-U01R-MAU-F | HW-U10R-F | | | | | | | | | | | | | | | |
| HW-U01R-MAU-F (no side entry) | HW-U10R-MAU-F (no side entry) | | | | | | | | | | | | | | | | |

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors


Terminal Blocks

Circuit Breakers


Dimensions

Pushbuttons


Flush

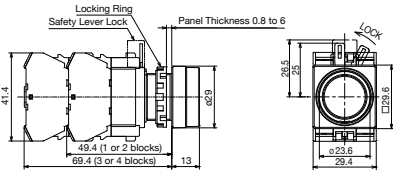


Extended

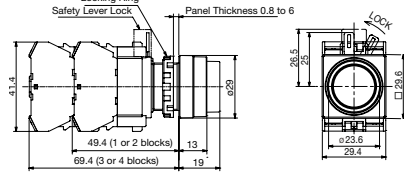


Extended with Full Shroud

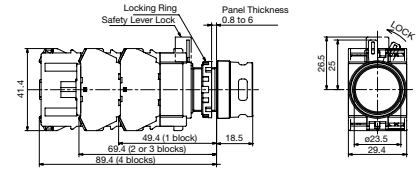


29mm Mushroom

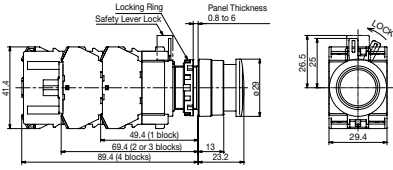


40mm Mushroom

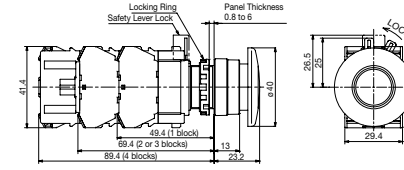


Mushroom with Full Shroud

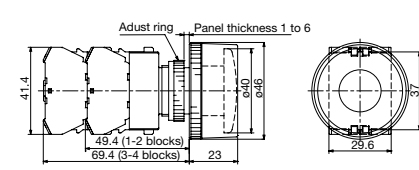


29mm Push-Lock-Turn-Reset

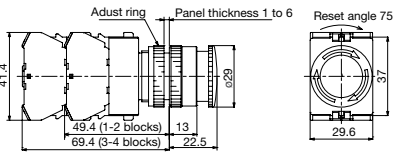


40mm Push-Lock-Turn-Reset

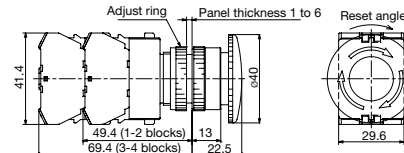


Keylock Push On/Off

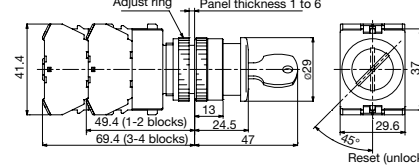


40mm Pushlock Key reset

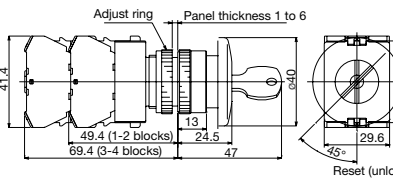


40mm Push-Pull

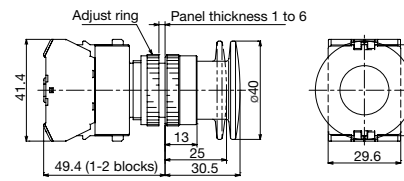




Square Flush

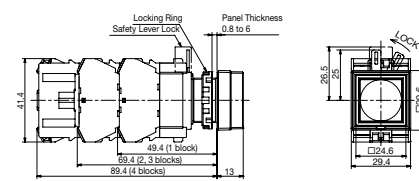

Square Extended

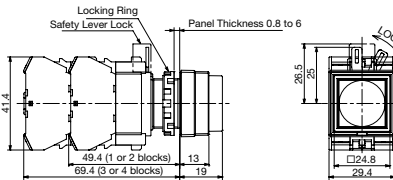

Selector Switches

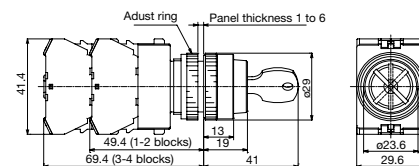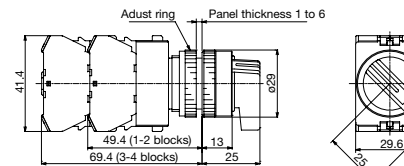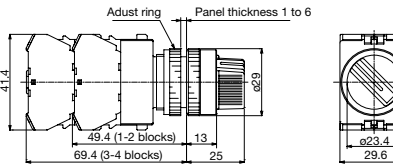

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors


Terminal Blocks

Circuit Breakers


Dimensions continued

Illuminated Pushbuttons


Extended

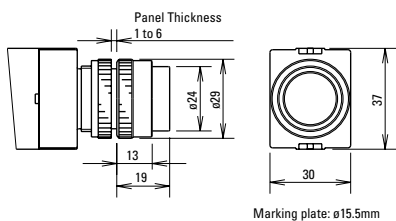


Extended with Full Shroud

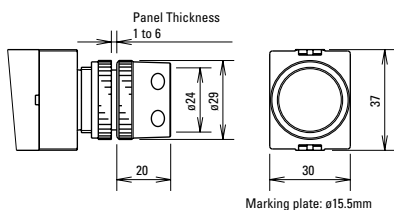


Square Extended

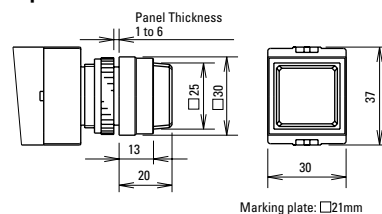


29mm Push-Turn-Reset

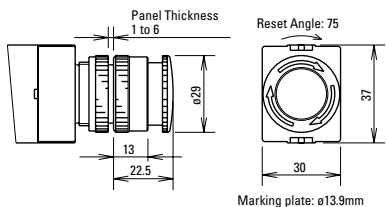


40mm Push-Turn-Reset

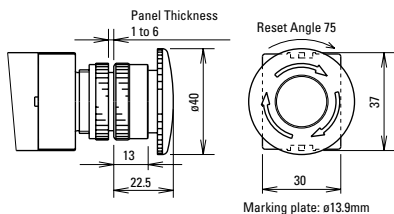

Mushroom

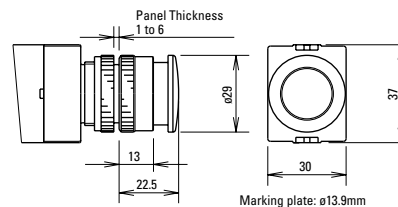


Push-Pull

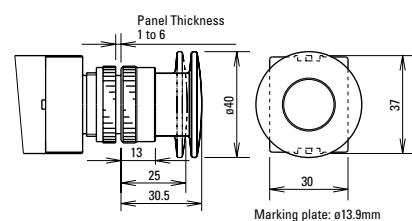


Illuminated Selector Switches


1 Contact Block with Full Voltage Adaptor

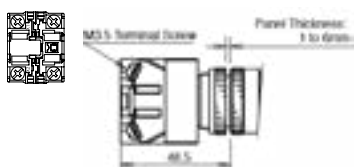


Transformer (2 blocks)

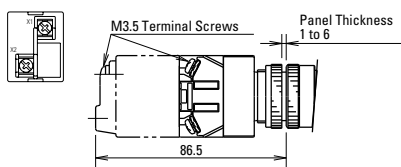


2 Contact Blocks with Full Voltage Adaptor

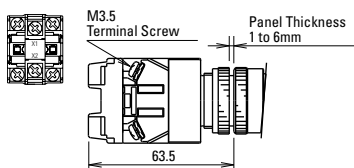


Transformer (4 blocks)

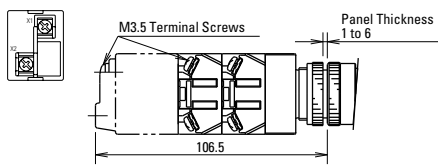

3 Contact Blocks with Full Voltage Adaptor

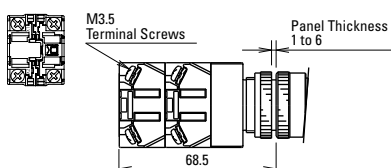


4 Contact Blocks with Full Voltage Adaptor

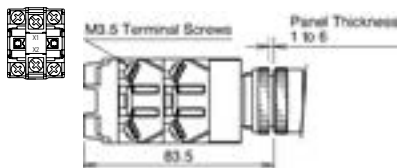


Dimensions continued

Pilot Lights


Round Flush APW1 Full Voltage




Round Flush Marking Type APW1B Full Voltage




Round Flush APW1 Transformer

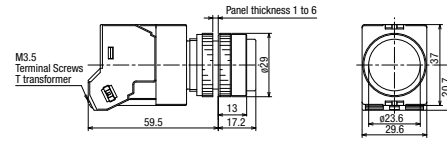


Round Flush Marking Type APW1B Transformer

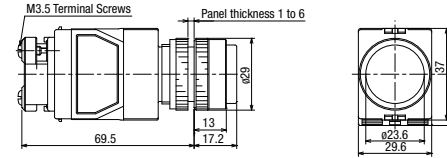


Dome APW2 Full Voltage




Dome APW2 Transformer

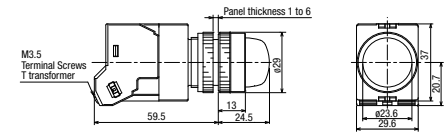


Square Flush Marking Type APQW1B Full Voltage



Square Flush Marking Type APQW1B Transformer

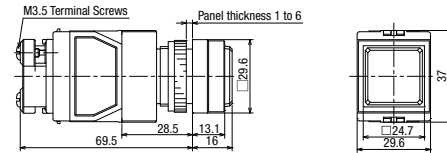

Illuminated Selector Switches

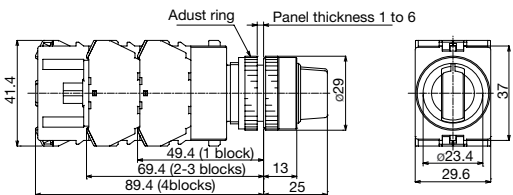

Dimensions continued


Panel Cut-Out

| Diagram | Part | Dimension |
|---------|-------------------------------|---|
| | Pushbuttons | <ul style="list-style-type: none"> The minimum mounting centers are applicable to switches with one layer of contact blocks (one to two contact blocks). When two layers of contact blocks are mounted, determine the minimum mounting centers in consideration of convenience for wiring. <ul style="list-style-type: none"> 1*) ø40 mm mushroom button type: 40 mm minimum 1*) 2-position, 3-position lever selector switch: 39 mm minimum 1*) 4-position, 5-position lever selector switch: 50 mm minimum When high temperature is expected, take necessary measures such as securing sufficient mounting centers or using a cooling fan. The ☆3.2 $\frac{+0.2}{0}$ mm recess is for preventing rotation and is not necessary when the nameplate or anti-rotation ring is not used. <p>All dimensions in mm.</p> |
| | Pilot Light | |
| | Illuminated Pushbuttons | |
| | Selector Switches | |
| | Illuminated Selector Switches | |


- The $\varnothing 0.137"$ ($\varnothing 3.5$ mm) recess is necessary when either the nameplate or anti-rotation ring is used.
- *1 >1.404" (36mm) for 2- or 3-position.
>1.95" (50mm) for 4- or 5-position.

Accessory Dimensions


OGL-31
Anti-Rotation Ring




OLW-C
Metal Button Guard




OCW-11
Pushbutton Rubber Boot

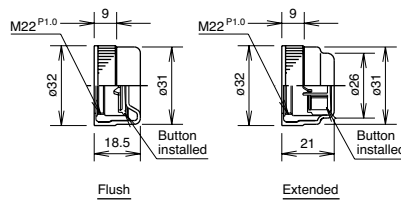

OB-31
Mounting Hole Rubber Plug



HW9Z-KL1
Lock-out Adaptor

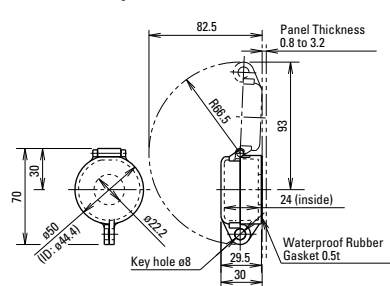


AW-RP1B
Round Plastic Bezel



AW-FP1B
Round Plastic w/Full Shroud




AW-QF1B
Square Full Shroud



Finger-Safe Cover Dimensions

APS-PVL

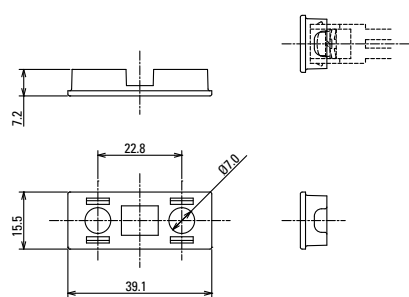

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors

Terminal Blocks

Circuit Breakers

Component Construction and General Instructions – TW Series

Switches & Pilot Devices

Signaling Lights


Relays & Sockets

Timers

Contactors

Terminal Blocks


Circuit Breakers

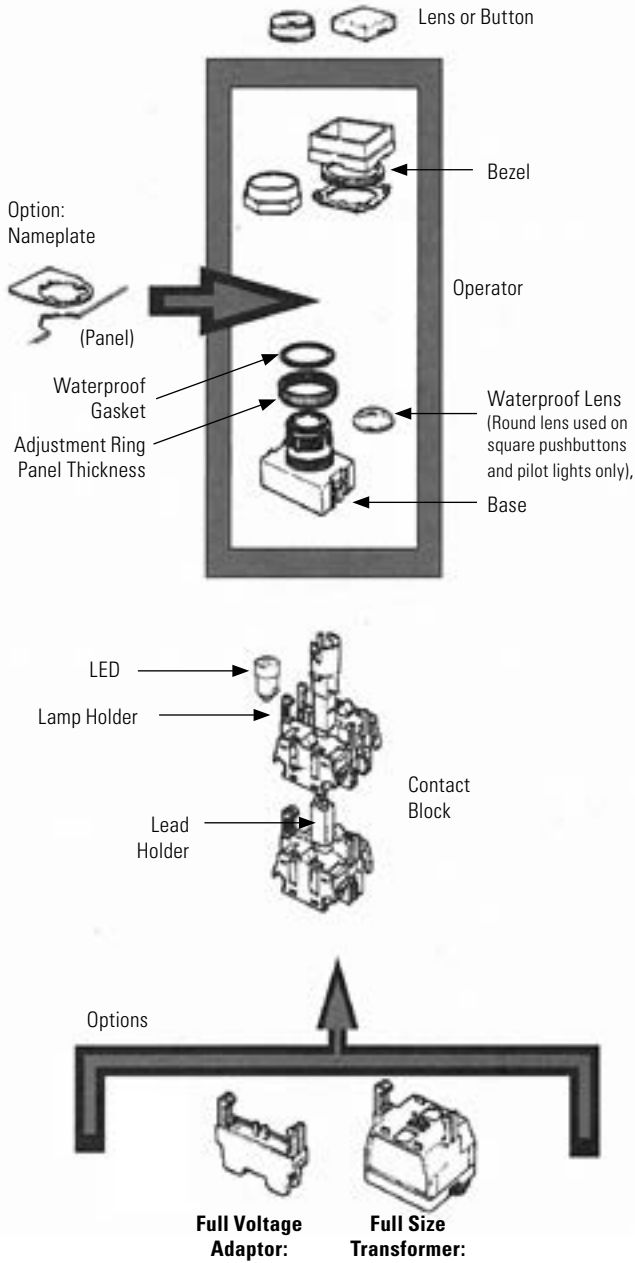

Instructions for Switches and Pilot Devices


TW Series: Adjustment for Panel Thickness

The panel thickness ring provides adjustment from 0.04" to 0.24" (1 to 6mm) in 0.004" (0.1mm) increments. Rotate the ring until the markings around the periphery are aligned for the desired thickness, as shown below.

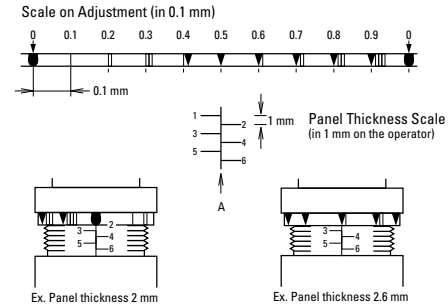

Note: When a nameplate or an anti-rotation ring is used, add 0.03" (0.8mm) to the panel thickness dimension.

An adjustment for panel thicknesses shown below can be made quickly by using the contact block remover.

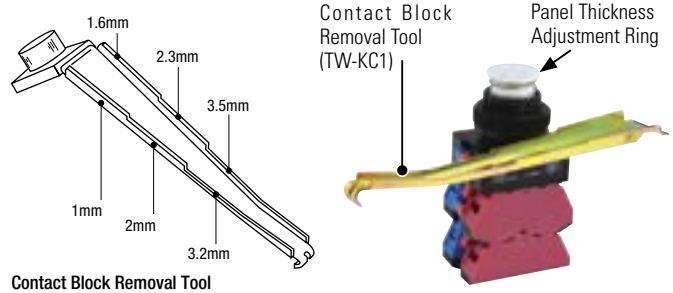

Instructions continued


Pilot Lights and Pushbuttons

IMPORTANT: Install the body of the TW control unit with the panel thickness scale facing up.

Octagonal and Round Bezels

Octagonal and round bezels screw into the operator. Use a locking ring wrench (optional) for secure tightening and easy removal. Round flush and extended buttons snap onto the operator base. Mushroom buttons screw onto the operator base.


Every round lens can be used with or without legend markings. Engraving can be done on a white translucent plate which is placed in the lens, or clear mylar can be printed and placed in the lens.

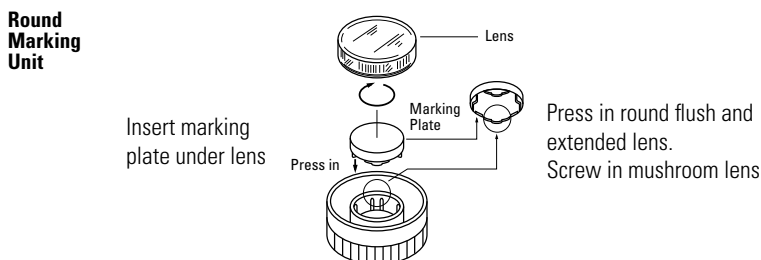

Square Bezels

Square bezels are installed in a 3-step procedure. First install the base plate from the front. Then install the lock nut using the nut locking wrench (optional). Finally, install the square bezel, which snap-fits onto the base plate. Square buttons also snap onto the operator base.

Every square lens can be used with or without legend markings. Engraving can be done on a white translucent plate which is placed in the lens, or clear mylar can be printed and placed in the lens. Square units include a round waterproof lens which screws into the operator. The square outer lens snaps on.

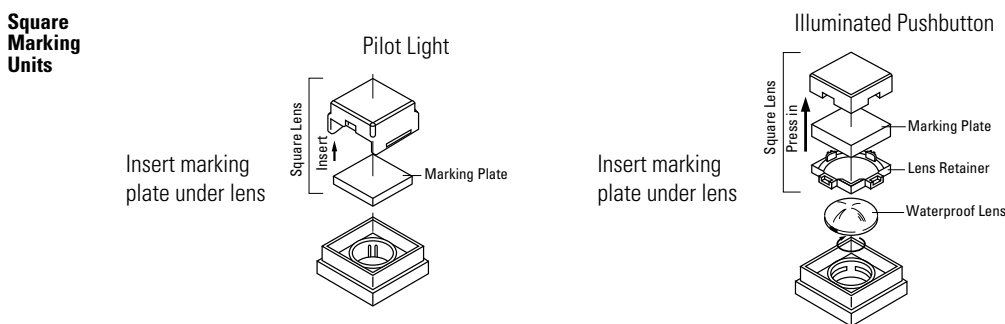

To remove square lens from operator, place a screwdriver under the indentation on the side of the lens. To remove the marking plate, place a screwdriver under the indentation and lift out the plate. The lens retainer can be removed by pressing a 3/16" screwdriver into one of the recesses.




Marking Plate Engraving Area


| Shape | Engraving Area | Used With | Part Number |
|----------|----------------|--------------------------------|-------------|
| Round | Ø 0.55" (14mm) | Illuminated pushbuttons | ALW2B |
| | Ø 0.55" (14mm) | Pilot lights | APW2B |
| Mushroom | Ø 0.55" (14mm) | Illuminated mushroom | ALW3B |
| Square | □ 0.83" (21mm) | Square pilot lights | APQW1B |
| Square | □ 0.83" (21mm) | Square illuminated pushbuttons | ALQW2B |

Instructions, continued


Selector Switches

The operator shaft of each unit has a recess to identify in which direction to install the handle. Align the handle with the recess. Press color insert (TW-HC1) into the handle and then press handle into the operator, as shown below.

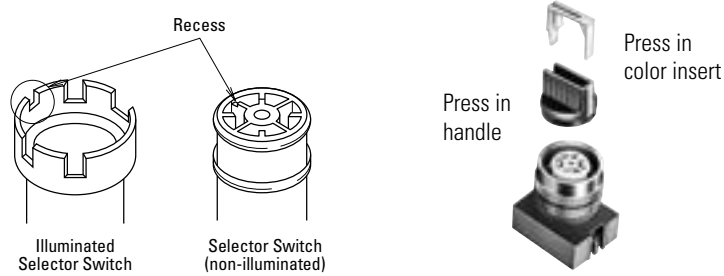


 Remove color insert before pulling out the handle.

Standard Operating Positions

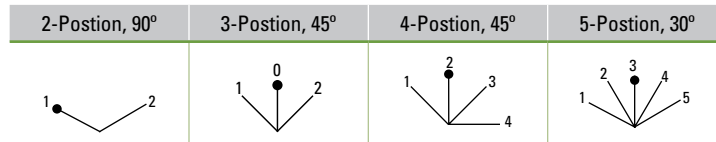


Positions: Non-Illuminated 3-Position Operators



Installation of LED Illuminated Units

Transformers are recommended for use in areas subjected to inductive noise. When using full voltage types, install a protection diode as shown below. (Diode with DC power supply to protect against surges and noise.)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Emergency Stop Switches / E-Stop Switches](#) category:

Click to view products by [Idec](#) manufacturer:

Other Similar products are found below :

[84-5021.2B40](#) [84-6830.0020](#) [A01ESSP8](#) [A22EL-M-24A-11B](#) [AVN302N-R](#) [A165E-S-01\(STOP\)](#) [AYLD2212602SN-R-TK962](#)
[AVLD39911N-R-24V](#) [A22Z-EG22](#) [A165E-SY](#) [3100.0110Y](#) [3050.1302Y](#) [3SE2243-0XX40](#) [3SK1111-2AB30](#) [3SK1211-1BB40](#) [44-710](#) [84-](#)
[6841.2B20](#) [84-6830.0040](#) [H3141AAKAA](#) [A165E-R-24D-01](#) [E3102AAAAB](#) [A22E-M-03](#) [ZA2BV05](#) [A22EL-M-T2-01](#) [951FY000-WO](#)
[ER6022-022N](#) [952+2000-00](#) [ES3S51653](#) [601+0000-OP](#) [E3101AAAAB](#) [84-5130.0040](#) [CS AR-05V024](#) [CS AR-22V024](#) [DS AE1VA](#) [DS](#)
[KB2A](#) [DS KB3A](#) [HE2G-21SHE-L-K](#) [HE6B-M211Y](#) [774191](#) [774316](#) [777760](#) [R1.100.0129.0 SMA0129- NO/NO](#) [R1.188.0640.0 SNV](#)
[4063KL-A](#) [R1.188.1810.0 SNA 4043K-A](#) [R1.188.1840.0 SNA 4043K-A](#) [SR BD40ALK-B02F](#) [AVLW39911D-R-120V](#) [AYD311NUG](#)
[AVLD32211DNUR](#) [84-5040.0020.0049](#)