


RF1V Force Guided Relays/SF1V Relay Sockets

Key features:

- Compact and EN compliant RF1V force guided relays
- Force guided contact mechanism (EN50205 Type A TÜV approved)
- Contact configuration
4-pole (2NO-2NC, 3NO-1NC)
6-pole (4NO-2NC, 5NO-1NC, 3NO-3NC)
- Built-in LED indicator available.
- Fast response time (8 ms maximum).
- High shock resistance (200 m/s² minimum)
- Finger-safe DIN rail mount socket and PC board mount socket.

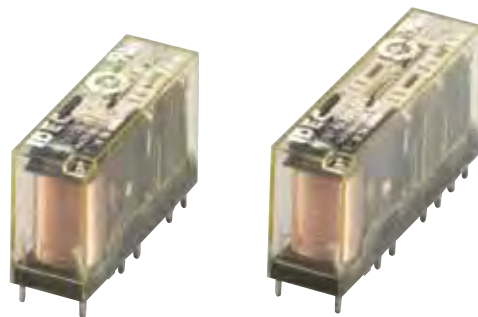

| Applicable Standard | Marking | Certification Organization/ File Number |
|--------------------------|---------|---|
| UL508 CSA C22.2 No.14 | | UL/c-UL File No. E55996 |
| EN50205 EN61810-1 | | TÜV SÜD |

Part Number Selection

| Contact | Part Number | | | |
|---------|-----------------------|--------------------|--------------------|--------|
| | Without LED Indicator | With LED Indicator | Rated Coil Voltage | |
| 4-pole | 2NO-2NC | RF1V-2A2B-D12 | RF1V-2A2BL-D12 | 12V DC |
| | | RF1V-2A2B-D24 | RF1V-2A2BL-D24 | 24V DC |
| | | RF1V-2A2B-D48 | RF1V-2A2BL-D48 | 48V DC |
| | 3NO-1NC | RF1V-3A1B-D12 | RF1V-3A1BL-D12 | 12V DC |
| | | RF1V-3A1B-D24 | RF1V-3A1BL-D24 | 24V DC |
| | | RF1V-3A1B-D48 | RF1V-3A1BL-D48 | 48V DC |
| 6-pole | 4NO-2NC | RF1V-4A2B-D12 | RF1V-4A2BL-D12 | 12V DC |
| | | RF1V-4A2B-D24 | RF1V-4A2BL-D24 | 24V DC |
| | | RF1V-4A2B-D48 | RF1V-4A2BL-D48 | 48V DC |
| | 5NO-1NC | RF1V-5A1B-D12 | RF1V-5A1BL-D12 | 12V DC |
| | | RF1V-5A1B-D24 | RF1V-5A1BL-D24 | 24V DC |
| | | RF1V-5A1B-D48 | RF1V-5A1BL-D48 | 48V DC |
| | 3NO-3NC | RF1V-3A3B-D12 | RF1V-3A3BL-D12 | 12V DC |
| | | RF1V-3A3B-D24 | RF1V-3A3BL-D24 | 24V DC |
| | | RF1V-3A3B-D48 | RF1V-3A3BL-D48 | 48V DC |

Sockets

| Style | No. of Poles | Ordering Type No. |
|----------------------------|--------------|-------------------|
| DIN Rail Mount Sockets | 4 | SF1V-4-07L |
| | 6 | SF1V-6-07L |
| PC Board Mount Sockets | 4 | SF1V-4-61 |
| | 6 | SF1V-6-61 |

Certification for Sockets

| Applicable Standard | Marking | Certification Organization/ File Number |
|--------------------------|---------|--|
| UL508 CSA C22.2 No.14 | | UL/c-UL File No. E62437 |
| EN147000 EN147100 | | TÜV SÜD |
| | | EC Low Voltage Directive (DIN rail mount sockets only) |

Switches & Pilot Lights

Signaling Lights

Relays & Sockets

Timers

Contactors

Terminal Blocks

Circuit Breakers



Coil Ratings

| Contact | Rated Coil Voltage (V) | Rated Current (mA) ±10% (at 20°C) ¹ | Coil Resistance (Ω) ±10% (at 20°C) | Operating Characteristics (at 20°C) | | | Power Consumption | | | |
|---------|------------------------|--|------------------------------------|-------------------------------------|-----------------|---|-------------------|-------------|------|--------------|
| | | | | Pickup Voltage | Dropout Voltage | Maximum Continuous Applied Voltage ² | | | | |
| 4-pole | 2NO-2NC | 12V DC | 30 | 75% maximum | 10% minimum | 110% | Approx. 0.36W | | | |
| | | 24V DC | 15 | | | | | | | |
| | | 48V DC | 7.5 | | | | | | | |
| | 3NO-1NC | 12V DC | 30 | | | | | | | |
| | | 24V DC | 15 | | | | | | | |
| | | 48V DC | 7.5 | | | | | | | |
| 6-pole | 4NO-2NC | 12V DC | 41.7 | | | | 75% maximum | 10% minimum | 110% | Approx. 0.5W |
| | | 24V DC | 20.8 | | | | | | | |
| | | 48V DC | 10.4 | | | | | | | |
| | 5NO-1NC | 12V DC | 41.7 | | | | | | | |
| | | 24V DC | 20.8 | | | | | | | |
| | | 48V DC | 10.4 | | | | | | | |
| | 3NO-3NC | 12V DC | 41.7 | | | | | | | |
| | | 24V DC | 20.8 | | | | | | | |
| | | 48V DC | 10.4 | | | | | | | |



- For relays with LED indicator, the rated current increases by approx. 2 mA.
- Maximum continuous applied voltage is the maximum voltage that can be applied to relay coils.

Accessories

| Item | Appearance | Specifications | Type No. | Remarks |
|----------|---|--|----------|----------------------------|
| DIN Rail |  | Aluminum Weight: Approx. 250g | BNDN1000 | Length: 1m Width: 35 mm |
| End Clip |  | Metal (zinc plated steel) Weight: Approx. 15g | BNL5 | — |
| |  | | BNL6 | |

Specifications

| | | | | | |
|---|---|---|---------|--|---------|
| Number of Poles | 4-pole | | 6-pole | | |
| Contact Configuration | 2NO-2NC | 3NO-1NC | 4NO-2NC | 5NO-1NC | 3NO-3NC |
| Contact Resistance (initial value) ¹ | 100 mΩ maximum | | | | |
| Contact Material | AgSnO ₂ (Au flashed) | | | | |
| Rated Load (resistive load) | 6A 250V AC, 6A 30V DC | | | | |
| Allowable Switching Power (resistive load) | 1500 VA, 180W | | | | |
| Allowable Switching Voltage | 250V AC, 30V DC | | | | |
| Allowable Switching Current | 6A | | | | |
| Minimum Applicable Load ² | 5V DC, 1 mA (reference value) | | | | |
| Power Consumption (approx.) | 0.36W | | 0.5W | | |
| Insulation Resistance | 1000 MΩ minimum (500V DC megger, same measurement positions as the dielectric strength) | | | | |
| Dielectric Strength | Between contact and coil | 4000V AC, 1 minute | | | |
| | Between contacts of different poles | 2500V AC, 1 minute Between contacts 7-8 and 9-10 | | 2500V AC, 1 minute Between contacts 7-8 and 11-12 Between contacts 9-10 and 13-14 Between contacts 11-12 and 13-14 | |
| | | 4000V AC, 1 min. Between contacts 3-4 and 5-6 Between contacts 3-4 and 7-8 Between contacts 5-6 and 9-10 | | 4000V AC, 1 min. Between contacts 3-4 and 5-6 Between contacts 3-4 and 7-8 Between contacts 5-6 and 9-10 Between contacts 7-8 and 9-10 | |
| | Between contacts of the same pole | 1500V AC, 1 minute | | | |
| Operating Time (at 20°C) | 20 ms maximum (at the rated coil voltage, excluding contact bounce time) | | | | |
| Response Time (at 20°C) ³ | 8 ms maximum (at the rated coil voltage, excluding contact bounce time) | | | | |
| Release Time (at 20°C) | 20 ms maximum (at the rated coil voltage, excluding contact bounce time) | | | | |
| Vibration Resistance | Operating Extremes | 10 to 55 Hz, amplitude 0.75 mm | | | |
| | Damage Limits | 10 to 55 Hz, amplitude 0.75 mm | | | |
| Shock Resistance | Operating Extremes (half sine-wave pulse: 11 ms) | 200 m/s ² , when mounted on DIN rail mount socket: 150 m/s ² | | | |
| | Damage Limits (half sine-wave pulse: 6 ms) | 1000 m/s ² | | | |
| Electrical Life | 250V AC 6A resistive load: 100,000 operations minimum (operating frequency 1200 per hour) 30V DC 6A resistive load: 100,000 operations minimum (operating frequency 1200 per hour) 250V AC 1A resistive load: 500,000 operations minimum (operating frequency 1800 per hour) 30V DC 1A resistive load: 500,000 operations minimum (operating frequency 1800 per hour) [AC 15] 240V AC 2A inductive load: 100,000 operations minimum (operating frequency 1200 per hour, cos φ = 0.3) [DC 13] 24V DC 1A inductive load: 100,000 operations minimum (operating frequency 1200 per hour, L/R = 48 ms) | | | | |
| Mechanical Life | 10 million operations minimum (operating frequency 10,800 operations per hour) | | | | |
| Operating Temperature ⁴ | -40 to +85°C (no freezing) | | | | |
| Operating Humidity | 5 to 85%RH (no condensation) | | | | |
| Storage Temperature | -40 to +85°C | | | | |
| Operating Frequency (rated load) | 1200 operations per hour | | | | |
| Weight (approx.) | 20g | | 23g | | |




1. Measured using 6V DC, 1A voltage drop method.
2. Failure rate level P (reference value)


3. Response time is the time until NO contact opens, after the coil voltage is turned off.
4. When using at 70 to 85°C, reduce the switching current by 0.1A/°C.


Socket Specifications

| Part Number | SF1V-4-07L | SF1V-6-07L | SF1V-4-61 | SF1V-6-61 |
|-------------------------------------|--|------------|-----------|-----------|
| Rated Current | 6A | | | |
| Rated Voltage | 250V AC/DC | | | |
| Insulation Resistance | 1000 MΩ minimum (500V DC megger, between terminals) | | | |
| Dielectric Strength | 2500V AC, 1 minute (between terminals) | | | |
| Screw Terminal Style | M3 slotted Phillips screw | | — | |
| Applicable Wire | 0.7 to 1.65 mm ² (18 AWG to 14 AWG) | | — | |
| Recommended Screw Tightening Torque | 0.5 to 0.8 N·m | | — | |
| Terminal Strength | Wire tensile strength: 50N min. | | — | |
| Vibration Resistance | Damage limits: 10 to 55 Hz, amplitude 0.75 mm Resonance: 10 to 55 Hz, amplitude 0.75 mm | | | |
| Shock Resistance | 1000 m/s ² | | | |
| Operating Temperature ¹ | -40 to +85°C (no freezing) | | | |
| Operating Humidity | 5 to 85% RH (no condensation) | | | |
| Storage Humidity | -40 to +85°C | | | |
| Degree of Protection | IP20 (finger-safe screw terminals) | | — | |
| Weight (approx.) | 40g | 55g | 9g | 10g |

 1. When using at 70 to 85°C, reduce the switching current by 0.1A/°C.


Applicable Crimping Terminals Specifications




 Note: Ring tongue terminals cannot be used.

Characteristics

Maximum Switching Capacity




Electrical Life Curve



Notes on Contact Gaps except Welded Contacts

Example: RF1V-2A2B-D24



- If the NO contact (7-8 or 9-10) welds, the NC contact (3-4 or 5-6) remains open even when the relay coil is de-energized, maintaining a gap of 0.5 mm. The remaining unwelded NO contact (9-10 or 7-8) is either open or closed.
- If the NC contact (3-4 or 5-6) welds, the NO contact (7-8 or 9-10) remains open even when the relay coil is energized, maintaining a gap of 0.5 mm. The remaining unwelded NC contact (5-6 or 3-4) is either open or closed.

Switches & Pilot Lights

Signaling Lights

Relays & Sockets

Timers


Contactors

Terminal Blocks


Circuit Breakers

RF1V Dimensions (mm)

RF1V (4-pole)

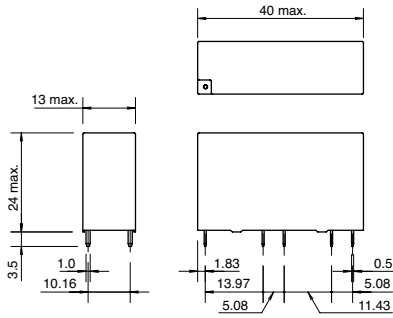


RF1V (6-pole)

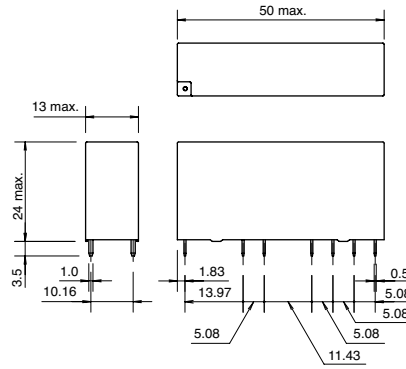


PC Board Terminal type Mounting Hole Layout (Bottom View)

RF1V (4-pole)





RF1V (6-pole)

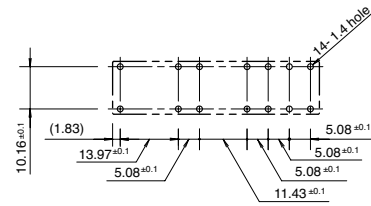

Internal Connection (View from Bottom) With Indicator and Diode (-LD type)




RF1V (4-pole)

Without LED Indicator





RF1V (6-pole)




Without LED Indicator



With LED Indicator




With LED Indicator




SF1V DIN Rail Mount Socket Dimensions (mm)

SF1V-4-07L (4-pole)

(Internal Connection)




(Top View)


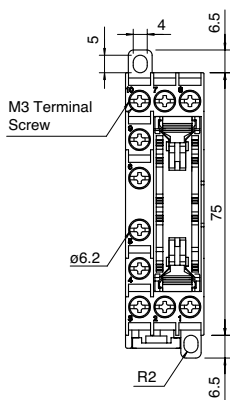


SF1V-6-07L (6-pole)


(Internal Connection)




(Top View)

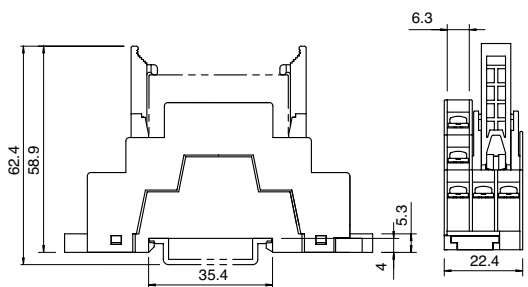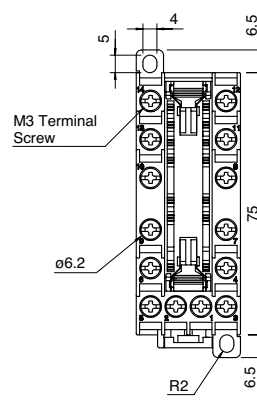


(Panel Mounting Hole Layout)

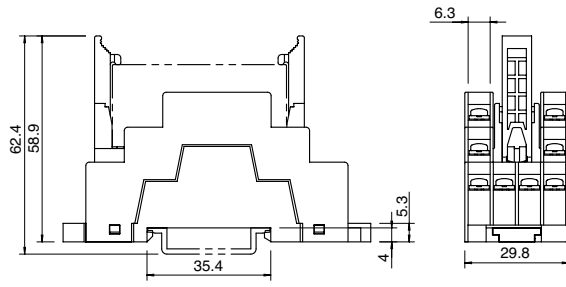

(Panel Mounting Hole Layout)

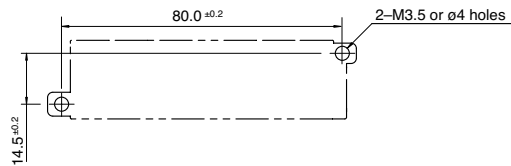

(Top View)

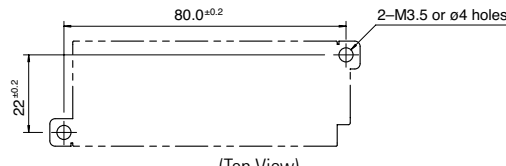

(Top View)

Switches & Pilot Lights
—
Signaling Lights

Relays & Sockets

Timers

Contactors



Terminal Blocks

Circuit Breakers

SF1V PC Board Mount Sockets

SF1V-4-07L (4-pole)


SF1V-6-07L (6-pole)

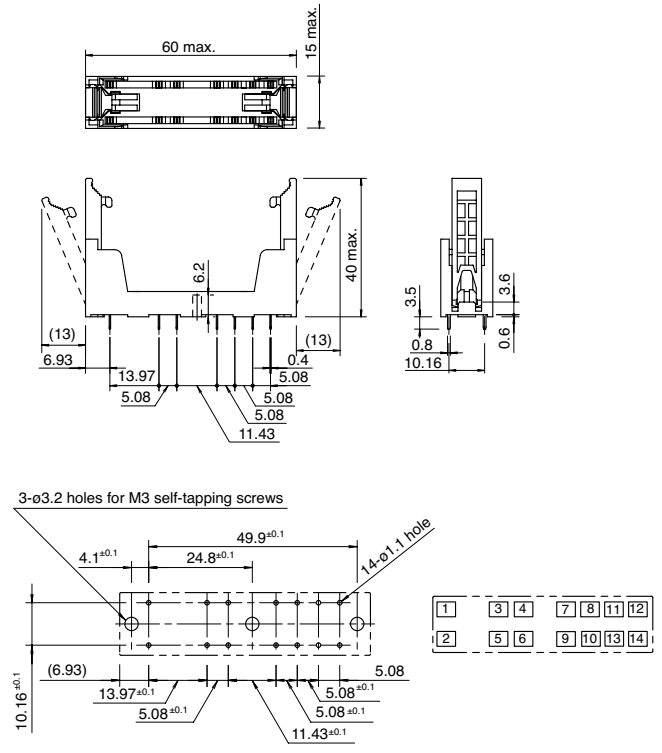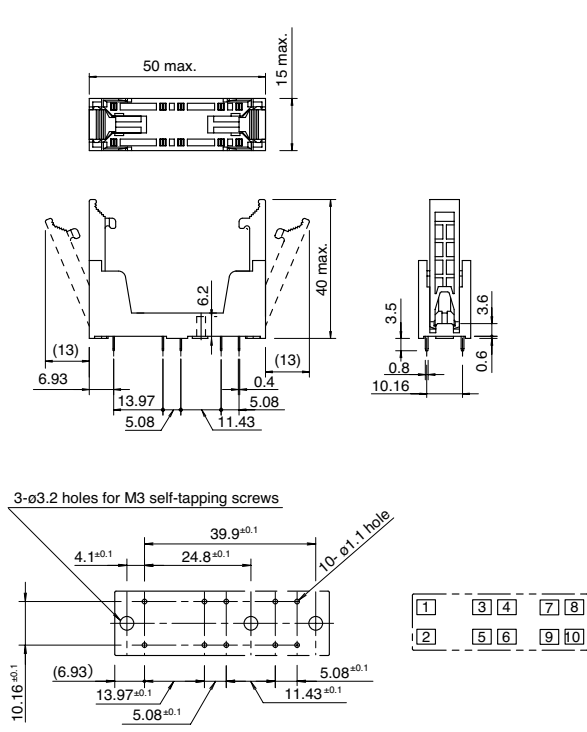


Operating Instructions

Driving Circuit for Relays


- To ensure correct relay operation, apply rated voltage to the relay coil.
- Input voltage for the DC coil:
A complete DC voltage is best for the coil power to make sure of stable relay operation. When using a power supply containing a ripple voltage, suppress the ripple factor within 5%. When power is supplied through a rectification circuit, the relay operating characteristics, such as pickup voltage and dropout voltage, depend on the ripple factor. Connect a smoothing capacitor for better operating characteristics as shown below.

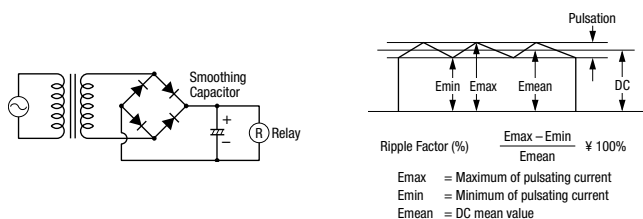

- Leakage current while relay is off:
When driving an element at the same time as the relay operation, special consideration is needed for the circuit design. As shown in the incorrect circuit below, leakage current (I_o) flows through the relay coil while the relay is off. Leakage current causes coil release failure or adversely affects the vibration resistance and shock resistance. Design a circuit as shown in the correct example.

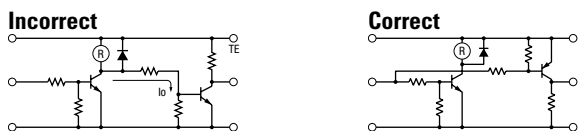

- Surge suppression for transistor driving circuits:
When the relay coil is turned off, a high-voltage pulse is generated, causing a transistor to deteriorate and sometimes to break. Be sure to connect a diode to suppress the back electromotive force. Then, the coil release time becomes slightly longer. To shorten the coil release time, connect a Zener diode between the collector and emitter of the transistor. Select a Zener diode with a Zener voltage slightly higher than the power voltage.



Protection for Relay Contacts

- The contact ratings show maximum values. Make sure that these values are not exceeded. When an inrush current flows through the load, the contact may become welded. If this is the case, connect a contact protection circuit, such as a current limiting resistor.
- Contact protection circuit:
When switching an inductive load, arcing causes carbides to form on the contacts, resulting in increased contact resistance. In consideration of contact reliability, contact life, and noise suppression, use of a surge absorbing circuit is recommended. Note that the release time of the load becomes slightly longer. Check the operation using the actual load. Incorrect use of a contact protection circuit will adversely affect switching characteristics. Four typical examples of contact protection circuits are shown in the following table:

| | |
|------------------------|--|
| <p>RC</p> | <p>This protection circuit can be used when the load impedance is smaller than the RC impedance in an AC load power circuit.</p> <ul style="list-style-type: none"> R: Resistor of approximately the same resistance value as the load C: 0.1 to 1 μF |
| | <p>This protection circuit can be used for both AC and DC load power circuits.</p> <p>R: Resistor of approximately the same resistance value as the load C: 0.1 to 1 μF</p> |
| <p>Diode</p> | <p>This protection circuit can be used for DC load power circuits. Use a diode with the following ratings.</p> <p>Reverse withstand voltage: Power voltage of the load circuit x 10 Forward current: More than the load current</p> |
| <p>Varistor</p> | <p>This protection circuit can be used for both AC and DC load power circuits.</p> <p>For a best result, when using a power voltage of 24 to 48V AC/DC, connect a varistor across the load. When using a power voltage of 100 to 240V AC/DC, connect a varistor across the contacts.</p> |

- Do not use a contact protection circuit as shown below:

| | |
|--|--|
| | <p>This protection circuit is very effective in arc suppression when opening the contacts. But, the capacitor is charged while the contacts are opened. When the contacts are closed, the capacitor is discharged through the contacts, increasing the possibility of contact welding.</p> |
| | <p>This protection circuit is very effective in arc suppression when opening the contacts. But, when the contacts are closed, a current flows to charge the capacitor, causing contact welding.</p> |

Generally, switching a DC inductive load is more difficult than switching a DC resistive load. Using an appropriate arc suppressor, however, will improve the switching characteristics of a DC inductive load.

Soldering

- When soldering the relay terminals, use a soldering iron of 30 to 60W, and quickly complete soldering (within approximately 3 seconds).
- Use a non-corrosive rosin flux.

Operating Instructions con't

Other Precautions

1. General notice:

To maintain the initial characteristics, do not drop or shock the relay.

The relay cover cannot be removed from the base during normal operation. To maintain the initial characteristics, do not remove the relay cover.

Use the relay in environments free from condensation, dust, sulfur dioxide (SO₂), and hydrogen sulfide (H₂S).

Make sure that the coil voltage does not exceed applicable coil voltage range.

2. UL and CSA ratings may differ from product rated values determined by IDEC.

3. Do not use relays in the vicinity of strong magnetic field, as this may affect relay operation.

Safety Precautions

- Turn off the power to the relay before starting installation, removal, wiring, maintenance, and inspection of the relays. Failure to turn power off may cause electrical shock or fire hazard.
- Observe specifications and rated values, otherwise electrical shock or fire hazard may be caused.
- Use wires of the proper size to meet voltage and current requirements. Tighten the terminal screws on the relay socket to the proper tightening torque.
- Surge absorbing elements on AC relays with RC or DC relays with diode are provided to absorb the back electromotive force generated by the coil. When the relay is subject to an excessive external surge voltage, the surge absorbing element may be damaged. Add another surge absorbing provision to the relay to prevent damage.

Precautions for the RU Relays

- Before operating the latching lever of the RU relay, turn off the power to the RU relay. After checking the circuit, return the latching lever to the original position.
- Do not use the latching lever as a switch. The durability of the latching lever is a minimum of 100 operations.
- When using DC loads on 4PDT relays, apply a positive voltage to terminals of neighboring poles and a negative voltage to the other terminals of neighboring poles to prevent the possibility of short circuits.
- DC relays with a diode have a polarity in the coil terminals. Apply the DC voltage to the correct terminals.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Relay Sockets & Fixings](#) category:

Click to view products by [Idec](#) manufacturer:

Other Similar products are found below :

[00008258500](#) [00111976502](#) [0000-825-81-00](#) [60SY4S05](#) [M41G](#) [670-0125](#) [670-0127](#) [6700152](#) [670-0153](#) [6700156](#) [D258-2TS00](#) [70-309](#) [7-1393143-3](#) [7-1616360-5](#) [8000-DG2-5](#) [911361](#) [9-1616339-5](#) [PJF11N](#) [GDA12HA](#) [GDA12HD](#) [GDA12SA](#) [GDA12SD](#) [GDA16HD](#) [GDA22HA](#) [GDA95A](#) [GDA95D](#) [GFX20](#) [PT08QN](#) [PT 1/8 D = 3.2](#) [GUA1](#) [GUA2-11](#) [GUA4-31](#) [GUM5R](#) [GUR-120](#) [GUR-24](#) [GUR-240](#) [GUR-277](#) [GURX-277](#) [GUW12](#) [GUW95](#) [GUZ63L](#) [R99-11 FOR MY\(NAMEPLATE\)](#) [D52PR2T](#) [RES100K](#) [1310H-HDC](#) [1390H-1ST](#) [1393824-3](#) [1390H-2PC](#) [1410-2SM](#) [1410-3SM](#)