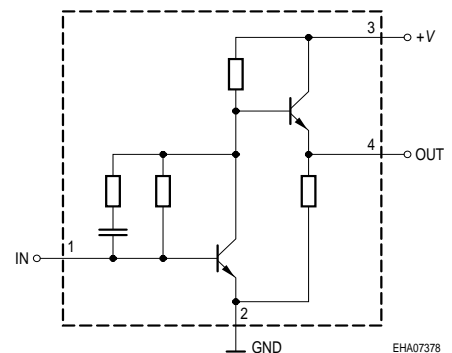
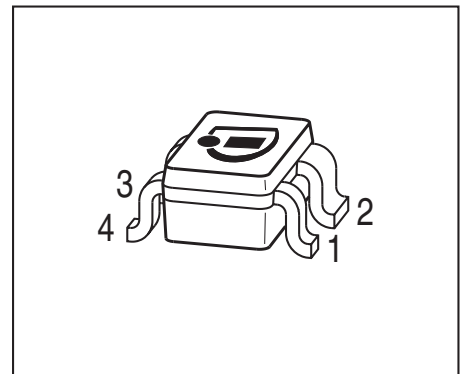


Si-MMIC-Amplifier in SIEGET® 25-Technologie

- Cascadable 50 Ω-gain block
- Unconditionally stable
- Gain $|S_{21}|^2 = 18.5$ dB at 1.8 GHz (Appl.1)
gain $|S_{21}|^2 = 22$ dB at 1.8 GHz (Appl.2)
 $IP_{3out} = +7$ dBm at 1.8 GHz ($V_D=3V, I_D=9.4mA$)
- Noise figure $NF = 2.2$ dB at 1.8 GHz
- Typical device voltage $V_D = 2$ V to 5 V
- Reverse isolation > 35 dB (Appl.2)
- Pb-free (RoHS compliant) package


Circuit Diagram

ESD (Electrostatic discharge) sensitive device, observe handling precaution!

| Type | Marking | Pin Configuration | | | | Package |
|--------|---------|-------------------|--------|-------|--------|---------|
| BGA427 | BMs | 1, IN | 2, GND | 3, +V | 4, Out | SOT343 |

Maximum Ratings

| Parameter | Symbol | Value | Unit |
|---|------------|-------------|------|
| Device current | I_D | 25 | mA |
| Device voltage | $V_{D,+V}$ | 6 | V |
| Total power dissipation $T_S = 120$ °C | P_{tot} | 150 | mW |
| RF input power | P_{RFIn} | -10 | dBm |
| Junction temperature | T_j | 150 | °C |
| Ambient temperature range | T_A | -65 ... 150 | |
| Storage temperature range | T_{stg} | -65 ... 150 | |

Thermal Resistance

| | | | |
|--|------------|------------|-----|
| Junction - soldering point ¹⁾ | R_{thJS} | ≤ 295 | K/W |
|--|------------|------------|-----|


¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.


| Parameter | Symbol | Values | | | Unit |
|--|--------------|--------|------------------|------|------|
| | | min. | typ. | max. | |
| AC characteristics $V_D = 3\text{ V}$, $Z_0 = 50\Omega$, Testfixture Appl.1 | | | | | |
| Insertion power gain $f = 0.1\text{ GHz}$ $f = 1\text{ GHz}$ $f = 1.8\text{ GHz}$ | $ S_{21} ^2$ | - | 27 22 18.5 | - | dB |
| Reverse isolation $f = 1.8\text{ GHz}$ | S12 | - | 22 | - | |
| Noise figure $f = 0.1\text{ GHz}$ $f = 1\text{ GHz}$ $f = 1.8\text{ GHz}$ | NF | - | 1.9 2 2.2 | - | |
| Intercept point at the output $f = 1.8\text{ GHz}$ | IP_{3out} | - | + 7 | - | dBm |
| Return loss input $f = 1.8\text{ GHz}$ | RL_{in} | - | >12 | - | dB |
| Return loss output $f = 1.8\text{ GHz}$ | RL_{out} | - | >9 | - | |

Typical configuration

Appl.1

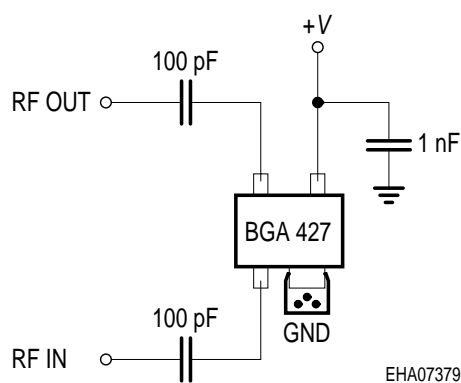

Appl.2

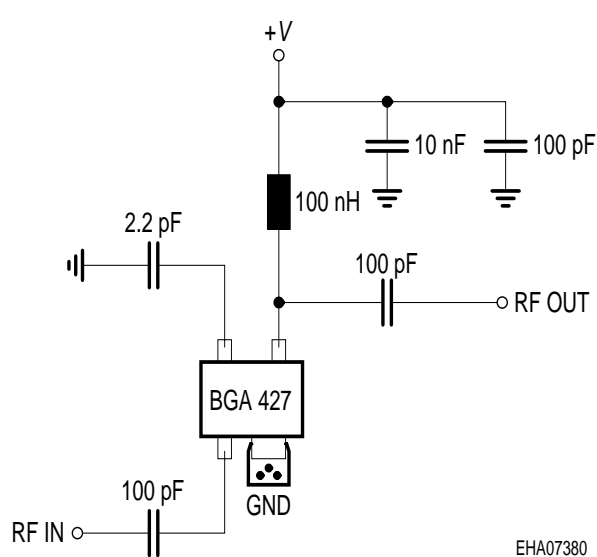


- Note: 1) Large-value capacitors should be connected from pin 3 to ground right at the device to provide a low impedance path (appl.1).
 2) The use of plated through holes right at pin 2 is essential for pc-board-applications. Thin boards are recommended to minimize the parasitic inductance to ground.

S-Parameters at $T_A = 25\text{ °C}$, (Testfixture, Appl.1)

| f | S_{11} | | S_{21} | | S_{12} | | S_{22} | |
|-----|----------|-----|----------|-----|----------|-----|----------|-----|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |

 $V_D = 3V, Z_0 = 50\Omega$

| | | | | | | | | |
|-----|--------|--------|--------|-------|--------|------|--------|-------|
| 0.1 | 0.1382 | -38.3 | 24.821 | 164.9 | 0.0022 | 50.7 | 0.6435 | 174.8 |
| 0.2 | 0.1179 | -16 | 24.606 | 158.9 | 0.0046 | 71.8 | 0.6278 | 166.9 |
| 0.5 | 0.1697 | -20.8 | 22.236 | 135.2 | 0.0104 | 83.8 | 0.54 | 147.3 |
| 0.8 | 0.1824 | -56.9 | 18.258 | 115.4 | 0.0169 | 94.8 | 0.4453 | 140.2 |
| 0.9 | 0.1782 | -69.1 | 17.152 | 109.4 | 0.0194 | 97.3 | 0.4326 | 139.4 |
| 1 | 0.176 | -80.6 | 15.786 | 104 | 0.0225 | 98.3 | 0.4129 | 138.1 |
| 1.5 | 0.1827 | -133.5 | 10.923 | 84.9 | 0.0385 | 99.7 | 0.3852 | 139.6 |
| 1.8 | 0.1969 | -156.1 | 9.029 | 77 | 0.0479 | 99.3 | 0.3917 | 139.3 |
| 1.9 | 0.2021 | -162.8 | 8.486 | 74.7 | 0.0517 | 98.9 | 0.3946 | 138.8 |
| 2 | 0.2116 | -167.7 | 8.015 | 72.3 | 0.0549 | 98.8 | 0.3991 | 138.3 |
| 2.5 | 0.2437 | 172.8 | 6.259 | 63 | 0.0709 | 97.1 | 0.4202 | 134.6 |
| 3 | 0.258 | 153.3 | 5.103 | 55 | 0.0892 | 96.9 | 0.4477 | 131 |

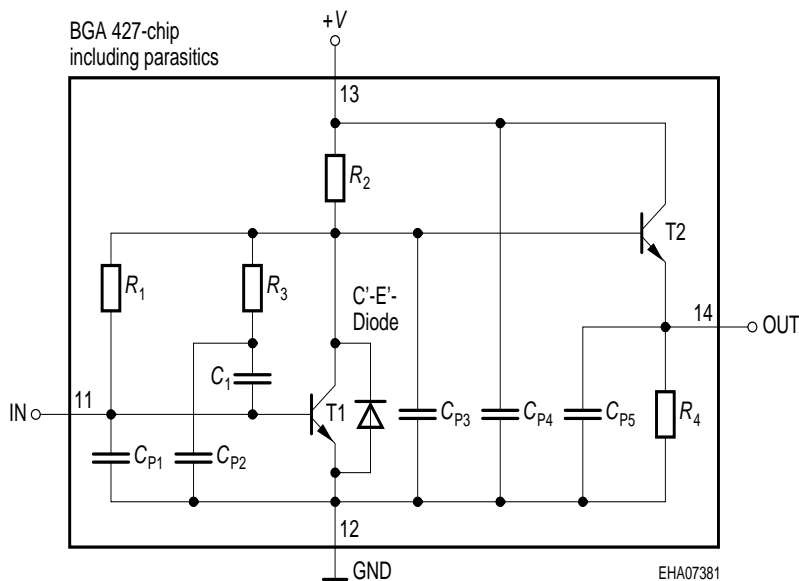Spice-model BGA 427


| | |
|-------------|----------------|
| T1 | T501 |
| T2 | T501 |
| R_1 | 14.5k Ω |
| R_2 | 280 Ω |
| R_3 | 2.4k Ω |
| R_4 | 170 Ω |
| C_1 | 2.3pF |
| C_{P1} | 0.2pF |
| C_{P2} | 0.2pF |
| C_{P3} | 0.6pF |
| C_{P4} | 0.1pF |
| C_{P5} | 0.1pF |
| C'-E'-diode | T1 |


Transistor Chip Data T1 (Berkley-SPICE 2G.6 Syntax) :

| | | | | | | | | |
|-------|---------|----------|-------|---------|----------|--------|----------|----------|
| IS = | 0.21024 | fA | BF = | 83.23 | - | NF = | 1.0405 | - |
| VAF = | 39.251 | V | IKF = | 0.16493 | A | ISE = | 15.761 | fA |
| NE = | 1.7763 | - | BR = | 10.526 | - | NR = | 0.96647 | - |
| VAR = | 34.368 | V | IKR = | 0.25052 | A | ISC = | 0.037223 | fA |
| NC = | 1.3152 | - | RB = | 15 | Ω | IRB = | 0.21215 | A |
| RBM = | 1.3491 | Ω | RE = | 1.9289 | | RC = | 0.12691 | Ω |
| CJE = | 3.7265 | fF | VJE = | 0.70367 | V | MJE = | 0.37747 | - |
| TF = | 4.5899 | ps | XTF = | 0.3641 | - | VTF = | 0.19762 | V |
| ITF = | 1.3364 | mA | PTF = | 0 | deg | CJC = | 96.941 | fF |
| VJC = | 0.99532 | V | MJC = | 0.48652 | - | XCJC = | 0.08161 | - |
| TR = | 1.4935 | ns | CJS = | 0 | fF | VJS = | 0.75 | V |
| MJS = | 0 | - | XTB = | 0 | - | EG = | 1.11 | eV |
| XTI = | 3 | - | FC = | 0.99469 | - | TNOM | 300 | K |

C'-E'-Diode Data (Berkley-SPICE 2G.6 Syntax) :

| | | | | | | | | |
|------|---|----|-----|------|---|------|----|----------|
| IS = | 2 | fA | N = | 1.02 | - | RS = | 20 | Ω |
|------|---|----|-----|------|---|------|----|----------|

All parameters are ready to use, no scaling is necessary

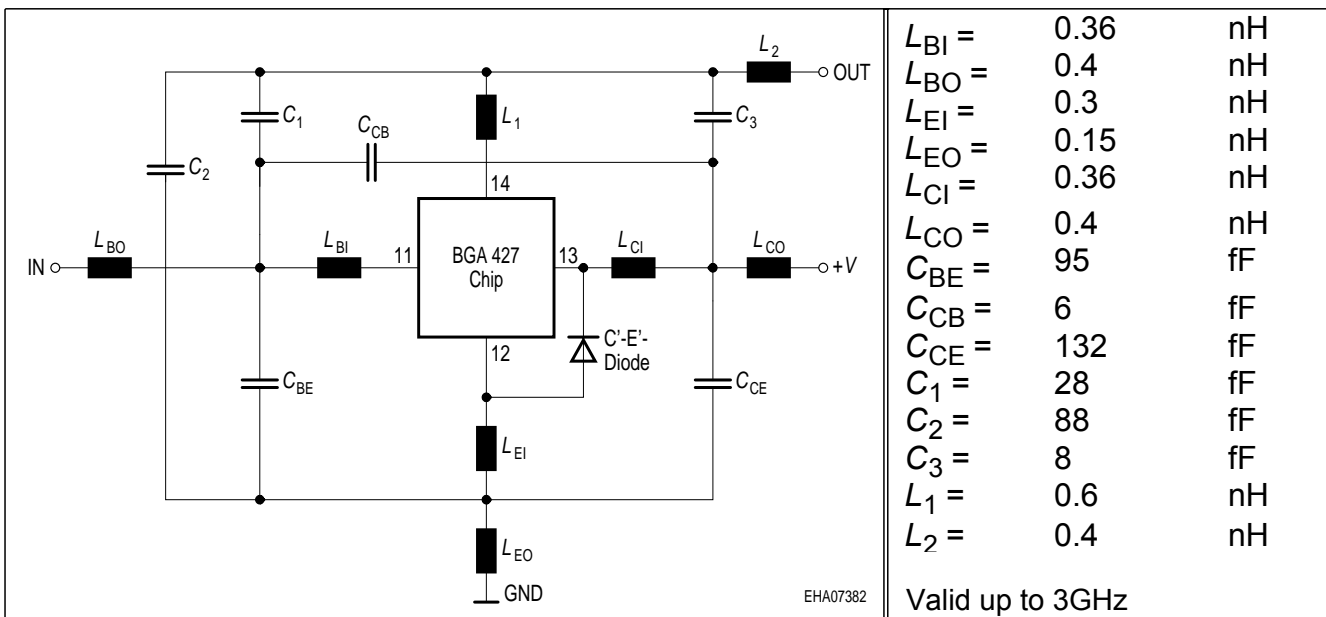Package Equivalent Circuit:


Extracted on behalf of Infineon Technologies AG by:
 Institut für Mobil-und Satellitentechnik (IMST)



For examples and ready to use parameters please contact your local Infineon Technologies distributor or sales office to obtain a Infineon Technologies CD-ROM or see Internet:
<http://www.infineon.com/silicondiscretres>

Insertion power gain $|S_{21}|^2 = f(f)$

Noise figure $NF = f(f)$

$V_D, I_D = \text{parameter}$


$V_D, I_D = \text{parameter}$

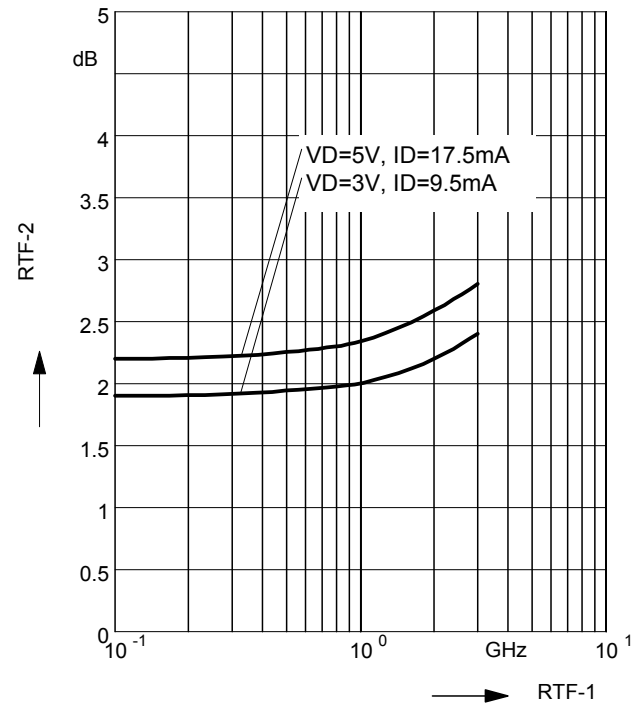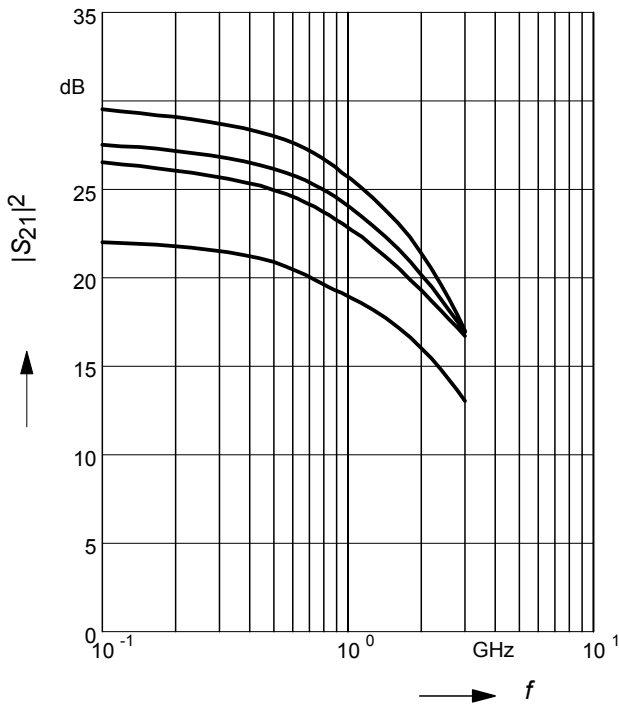


Intercept point at the output

$IP_{3out} = f(f)$


$V_D, I_D = \text{parameter}$

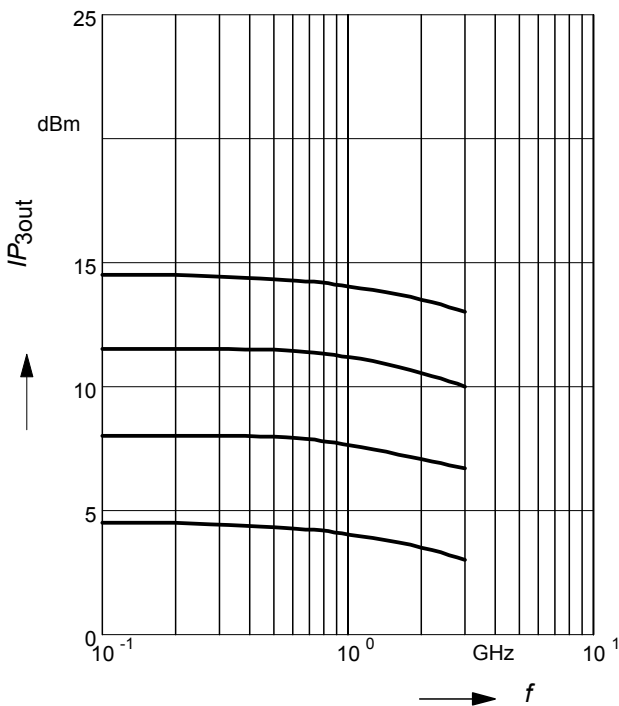


Package Outline

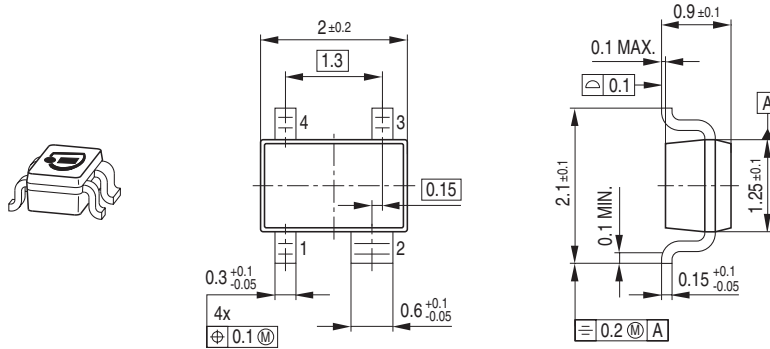

Foot Print




Marking Layout (Example)

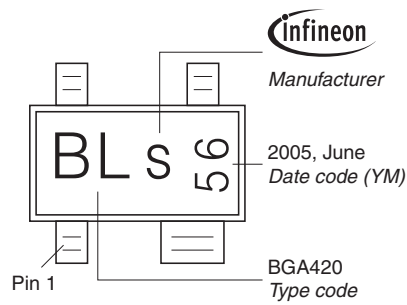

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
 Reel ø330 mm = 10.000 Pieces/Reel

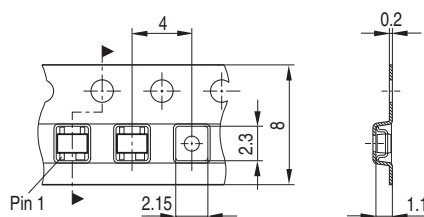

Edition 2009-11-16

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2009 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Amplifier](#) category:

Click to view products by [Infineon](#) manufacturer:

Other Similar products are found below :

[A82-1](#) [BGA622H6820XTSA1](#) [BGA 728L7 E6327](#) [BGB719N7ESDE6327XTMA1](#) [HMC397-SX](#) [HMC405](#) [HMC561-SX](#) [HMC8120-SX](#)
[HMC8121-SX](#) [HMC-ALH382-SX](#) [HMC-ALH476-SX](#) [SE2433T-R](#) [SMA3101-TL-E](#) [SMA39](#) [A66-1](#) [A66-3](#) [A67-1](#) [LX5535LQ](#) [LX5540LL](#)
[MAAM02350](#) [HMC3653LP3BETR](#) [HMC549MS8GETR](#) [HMC-ALH435-SX](#) [SMA101](#) [SMA32](#) [SMA411](#) [SMA531](#) [SST12LP17E-XX8E](#)
[SST12LP19E-QX6E](#) [WPM0510A](#) [HMC5929LS6TR](#) [HMC5879LS7TR](#) [HMC1126](#) [HMC1087F10](#) [HMC1086](#) [HMC1016](#) [SMA1212](#)
[MAX2689EWS+T](#) [MAAMSS0041TR](#) [MAAM37000-A1G](#) [LTC6430AIUF-15#PBF](#) [CHA5115-QDG](#) [SMA70-2](#) [SMA4011](#) [A231](#) [HMC-](#)
[AUH232](#) [LX5511LQ](#) [LX5511LQ-TR](#) [HMC7441-SX](#) [HMC-ALH310](#)