

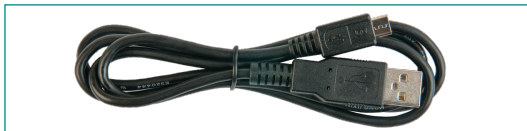



AIROC™ CYW20829 Bluetooth® Low Energy SoC Evaluation Kit

CYW920829M2EVK-02

Kit contents

1. AIROC™ CYW20829 Bluetooth® Low Energy SoC Evaluation Board (CYW9BTM2BASE3+CYW920829M2IPA2)
2. USB Type-A to Micro-B cable
3. Six jumper wires (five inches each)
4. Quick start guide (this document)

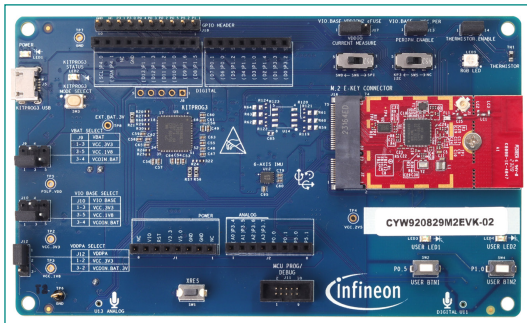

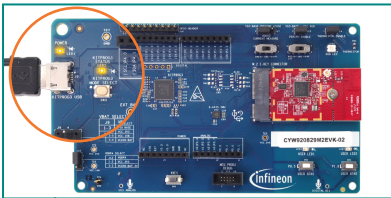


1 USB cable connected to the KitProg3 USB connector

Before you start

1. Ensure that you have the following:
 - PC with USB 2.0 port
 - UART terminal software such as Tera Term or Minicom
 - Download and install the AIROC™ Bluetooth® Connect app from Play Store or iOS App Store.
2. Connect the KitProg3 USB connector (J5) to your PC.
3. Visit the [kit webpage](#) to download and install the required software.
4. Ensure the following jumper settings to select 3.3 V. and other jumpers as default state.

Jumper	Position
J9	1 - 3
J10	1 - 3
J12	1 - 2
J13	1 - 2
J14	1 - 2
J17	1 - 2


5. Once the driver installation is complete, open the UART terminal software and set the COM port parameters to 8N1 and 115200 baud.

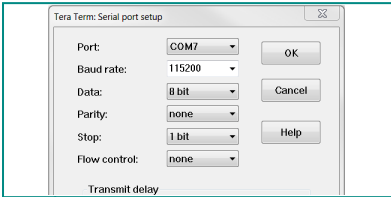


2 USB-UART COM port setup

Run the AIROC™ Bluetooth® Connect application

1. Turn ON Bluetooth® on your Android or iOS device.
2. Launch the AIROC™ Bluetooth® Connect app.
3. Press the reset button (SW1) on the CYW920829M2EVK-02 board to send advertisements and when the “Advertisement started” message on the serial terminal is displayed, confirm that USER LED2 is blinking.
4. Swipe down on the AIROC™ Bluetooth® Connect app home screen to scan for Bluetooth® Low Energy peripheral devices.
5. Your device (“Find Me Target”) appears on the home screen. Tap to establish a Bluetooth® LE connection with the device.
6. The USER LED2 changes from blinking state to always ON state after establishing a successful connection with the device.
7. Select ‘Find Me Profile’ and select an Alert level. The USER LED1 state is linked to the type of alert sent.

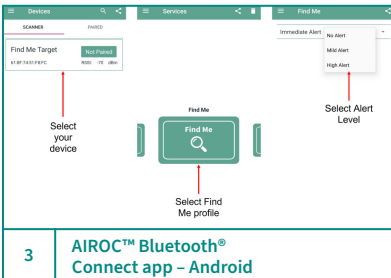


3 AIROC™ Bluetooth® Connect app – Android

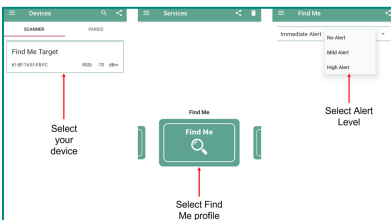

4 AIROC™ Bluetooth® Connect app – iOS

- No Alert: USER LED1 OFF
- Mild Alert: USER LED1 blinking
- High Alert: USER LED1 ON

AIROC™ CYW20829 Bluetooth® Low Energy SoC Evaluation Board details

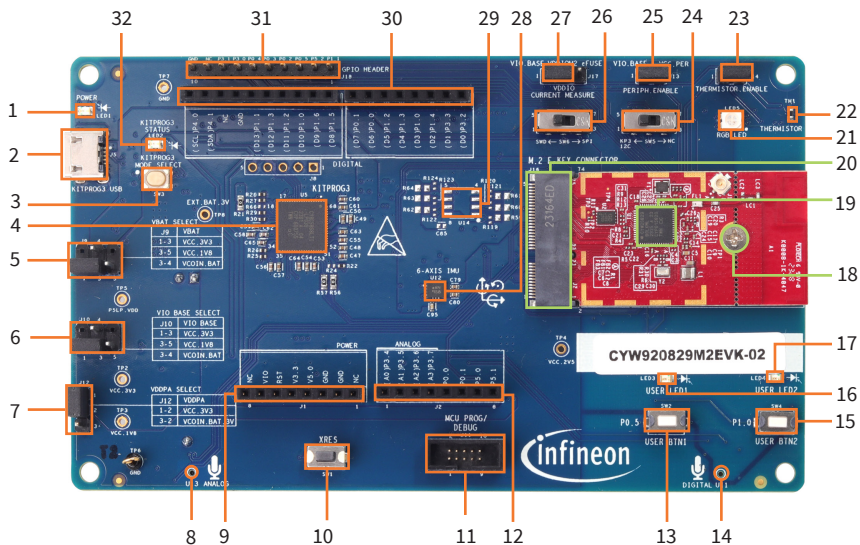

1. Power LED (LED1)
2. KitProg3 USB Micro-B connector (J5)
3. KitProg3 programming mode selection button (SW3)
4. KitProg3 (PSoC™ 5LP) programmer and debugger (CY8C5868LTI - LP039, U5)
5. VBAT voltage selection jumper (J9)
6. VIO_BASE voltage selection jumper (J10)
7. VDDPA voltage selection jumper (J12)
8. Analog mic (U13)**
9. Power header compatible with Arduino Uno R3 (J1)
10. Reset button (SW1)
11. 10-pin MCU PROG/DEBUG header (J11)
12. Analog header compatible with Arduino (J2)
13. User Button 1 (SW2)
14. Digital mic (U11)**
15. User Button 2 (SW4)
16. User LED 1 (LED3)
17. User LED 2 (LED4)
18. M.2 stand-off (MT1)
19. AIROC™ CYW20829 Bluetooth® and Bluetooth® LE system on chip
20. M.2 E-key interface connector (J16)
21. RGB LED (LED5)
22. Thermistor (TH1)
23. Thermistor enable header (J14)
24. KP3 to I2C Bus connect/ NC Selection SW (SW5)
25. Peripheral enable header (J13)
26. SWD /SPI Selection SW (SW6)
27. VDDIO current measurement header (J17)
28. Six-axis IMU (U12)
29. QSPI flash memory (U14)*
30. Digital I/O headers compatible with Arduino Uno R3 (J3, J4)
31. Extended GPIO header (J18)
32. KitProg3 status LED (LED2)

*Footprint only, not populated on the board

**Component is located at the bottom side of the board

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bluetooth Development Tools - 802.15.1 category](#):

Click to view products by [Infineon manufacturer](#):

Other Similar products are found below :

[1628 BCM9WICED_SENSE STEVAL-SPBT2ATV3](#) [RSL15-EVB](#) [RBL06FTR030](#) [RBL06FTR010](#) [RBL06FTR020](#) [ABX00070](#) [CBT250-1-EVB](#) [3026 MIKROE-2471](#) [MOD-NRF8001](#) [BLE-IOT-GEVB](#) [EVAL_PAN1026](#) [EVAL_PAN1720](#) [EVAL_PAN1740](#) [2267](#) [2479](#) [2633](#) [ENW89820AY2F](#) [ENW89820AY1F](#) [STEVAL-IDB005V1D](#) [STEVAL-IDB001V1](#) [MIKROE-2545](#) [2995](#) [CY8CKIT-062-BLE](#) [CYBLE-013025-EVAL](#) [CYBLE-214015-EVAL](#) [CYW920706WCDEVAL](#) [2829](#) [DFR0267](#) [DFR0296](#) [TEL0073](#) [BM-70-CDB](#) [AC320032-3](#) [ENW-89847AWKF](#) [CYBLE-212006-EVAL](#) [WSM-BL241-ADA-008DK](#) [SLWRB4303A](#) [FXX-3041-ESS](#) [ASD2116-R](#) [ISP1507-AX-EB](#) [ISP1507-AX-TB](#) [RN-4871-PICTAIL](#) [DA14695-00HQDEVKT-P](#) [DA14695-00HQDEVKT-U](#) [BMD-200-EVAL-S](#) [1715](#) [2269](#) [2746](#)