
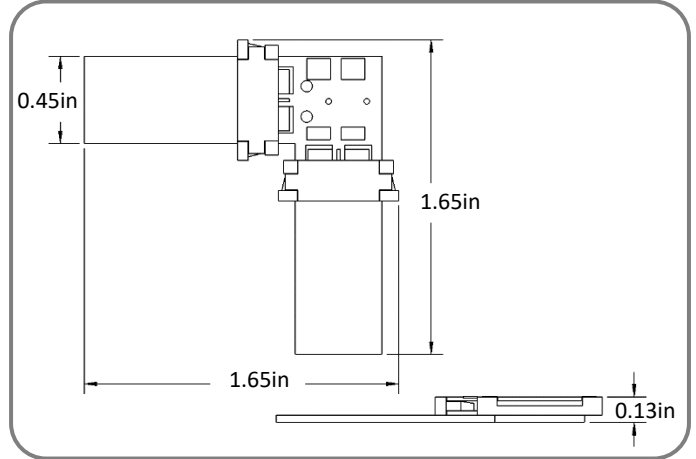


Inspired LED's patented solderless **Tiger Paw[®] Connectors** are the perfect solution for in-field LED system design and customization. These innovative accessories pair with LED flex strips for quick, convenient installation. Now, creating the perfect low-voltage lighting system is easier than ever, thanks to Inspired LED!

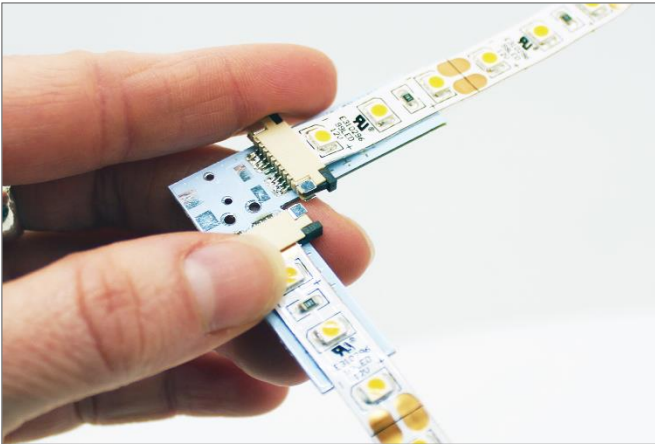

Product Specifications: SKU# 3635


- Solderless termination for 8-10mm LED flex strips (end to end around a 90° turn)
- Max Load- 5 AMPs • Net Weight- 3g • VHB adhesive backing included
- Also available with standard 3.5 x 1.3mm plug-in connector (SKU#3646) or screw terminal (SKU#3647)
- Industry proven locking system meets shock and vibration requirements for IEC 60068-2-27
- U.S. Patent No. 8,714,772

Instructions:


1 Use scissors to cut LED strips to length along copper solder pads ONLY.




2 Take hold of black sliding latch and pull outward to open, taking note of (+) polarity marked on board.




3 Peel back adhesive lining on first LED strip, taking note of polarity.




4 Insert strip into the gap between black sliding latch and beige bridge piece, matching polarity of strip to (+) signs on Tiger Paw[®] board.




5 Take hold of black latch and pull outward to open other side of Tiger Paw[®].




6 Peel back adhesive and insert LED strip between black latch and bridge. Be sure polarities are matched.



7 LED strips should be centered and fully inserted before sliding black latches firmly closed.



8 Provide power to the end of LED strip using 12V DC Class 2 power supply, checking all connections before install.



Troubleshooting: If LEDs are flickering, double check connection to be sure flex is fully inserted and secured, if no lights turn on check to be sure polarities are properly matched. **Marked polarities on Tiger Paw may be ignored as needed to change direction so long as polarity matches from strip to strip.**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Mounting Accessories](#) category:

Click to view products by [Inspired LED](#) manufacturer:

Other Similar products are found below :

[C16142_HEKLA-SOCKET-K](#) [3SU1401-1BG20-1AA0](#) [3SU1401-1BH60-1AA0](#) [3SU1900-0BC31-0NB0](#) [ES16-RT](#) [1SFA616921R2042](#)
[1SFA616921R2131](#) [1SFA616921R2133](#) [1SFA616921R2143](#) [1SFA611621R1093](#) [B8910020](#) [D3980022](#) [E3990022](#) [E3990040](#) [CABI12 E BK](#)
[1M SET PRM](#) [FLAT8 H/U BK 1M SET PRM](#) [BEGTIN12 J/S BK 1M SET PRM](#) [1-2213678-6](#) [C16791_CLAMP-Z45-A](#) [F17250_SOLDER-](#)
[CLIP-A](#) [2213831-3](#) [CM22-4-20MA](#) [CM22-R10K-MT](#) [CM22-R1K](#) [CM22-R50K](#) [CM22-R5K-MT](#) [10465](#) [M22-A](#) [M22-CK11](#) [M22-CK20](#)
[M22G-XGPV](#) [M22-K01](#) [M22-LCH-W](#) [M22-LC-R](#) [M22-LED230-R](#) [M22-LED230-W](#) [M22-LEDC230-G](#) [M22-LEDC-G](#) [M22-LEDC-W](#)
[M22-LED-G](#) [M22-LED-W](#) [M22-L-G](#) [M22-LH-G](#) [M22-LH-R](#) [M22-LH-W](#) [M22-L-R](#) [M22-L-W](#) [M22-L-X](#) [M22-MS](#) [M22-R10K](#)