
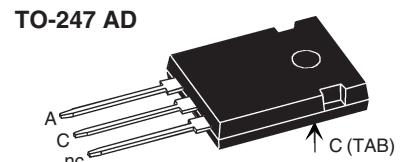


Power Schottky Rectifier

I_{FAV} = 40 A
V_{RRM} = 8 V
V_F = 0.23 V

V _{RSM}	V _{RRM}	Type
V	V	
8	8	DSS 40-0008D



A = Anode, C = Cathode , TAB = Cathode
 nc = not connected

Symbol	Conditions	Maximum Ratings		
I _{FRMS}		70	A	
I _{FAV}	T _C = 135°C; rectangular, d = 0.5	40	A	
I _{FAV}	T _C = 135°C; rectangular, d = 0.5; per device	80	A	
I _{FSM}	T _{VJ} = 45°C; t _p = 10 ms (50 Hz), sine	600	A	
E _{AS}	I _{AS} = 40 A; L = 100 µH; T _{VJ} = 25°C; non repetitive	80	mJ	
I _{AR}	V _A = 1.5 • V _{RRM} typ.; f = 10 kHz; repetitive	4	A	
(dv/dt) _{cr}		1000	V/µs	
T _{VJ}		-55...+150	°C	
T _{VJM}		150	°C	
T _{stg}		-55...+150	°C	
P _{tot}	T _C = 25°C	155	W	
M _d	mounting torque	0.8...1.2	Nm	
Weight	typical	6	g	

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM}-values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see Outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
I _R	① T _{VJ} = 25°C; V _R = V _{RRM} T _{VJ} = 100°C; V _R = V _{RRM}	200	mA
		1500	mA
V _F	I _F = 40 A; T _{VJ} = 125°C I _F = 40 A; T _{VJ} = 25°C I _F = 80 A; T _{VJ} = 125°C	0.23 0.34 0.35	V
R _{thJC}		0.8	K/W
R _{thCH}		0.25	K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
 Data according to IEC 60747 and per diode unless otherwise specified

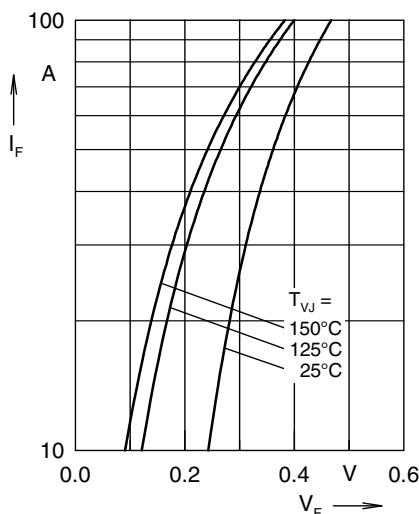


Fig. 1 Maximum forward voltage drop characteristics

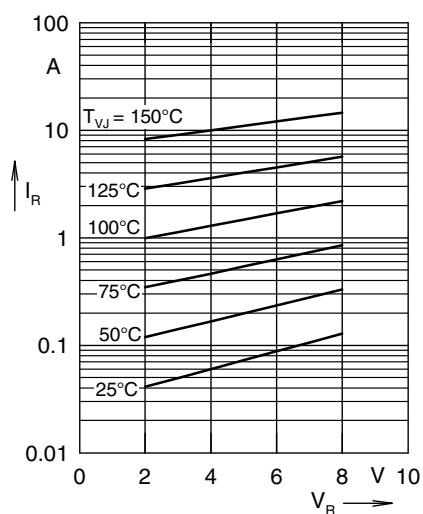


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

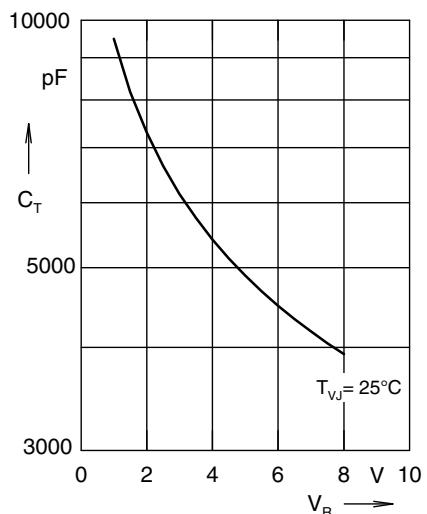


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

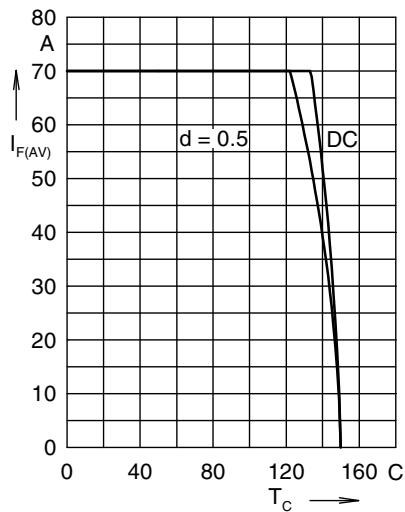


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

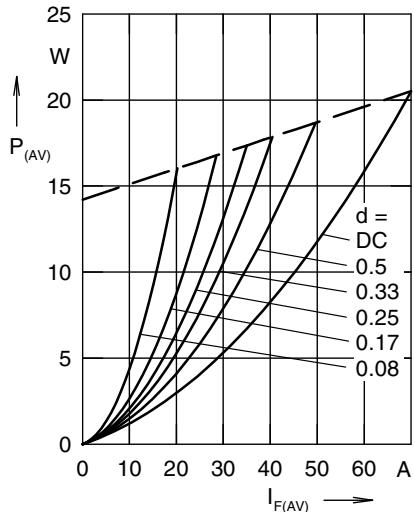


Fig. 5 Forward power loss characteristics

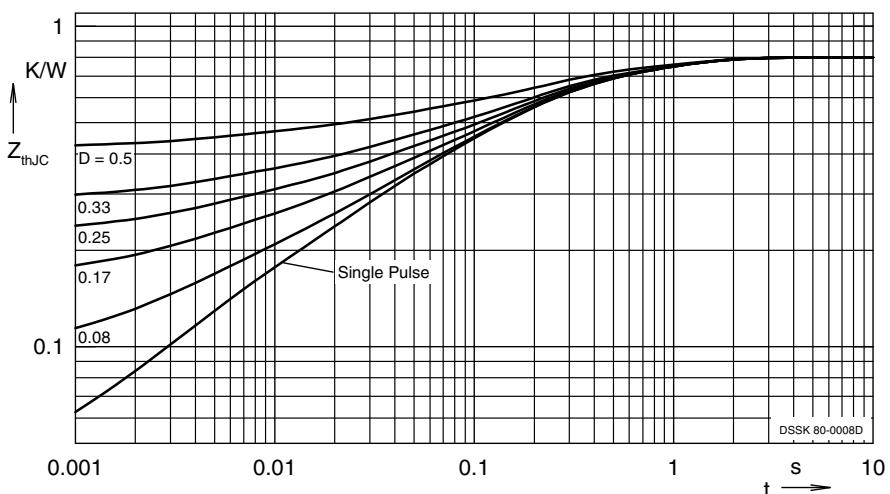


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode

IXYS reserves the right to change limits, test conditions and dimensions.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by IXYS manufacturer:

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#) [BAS16E6433HTMA1](#) [BAT54-02LRH](#) [E6327](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SK310-T](#) [SK32A-LTP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-6CWQ10FNHM3](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#) [NRVBM120ET1G](#) [NSR01L30MXT5G](#) [NTE573](#) [NTE6081](#) [SB560](#) [PMAD1108-LF](#) [SD103ATW-TP](#)