


Cell Type UR16650ZTA(2380mAh)

Specifications

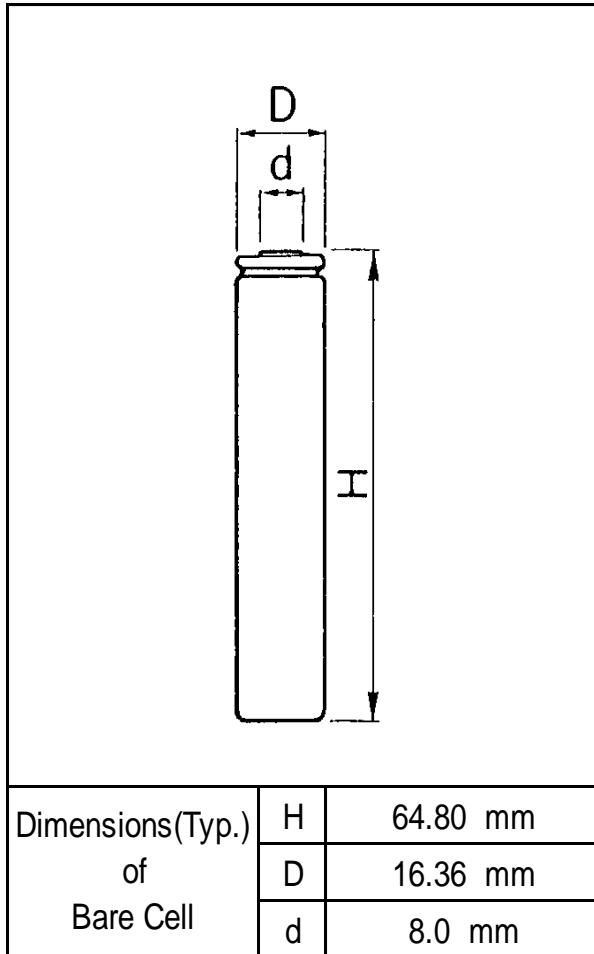


Rated Capacity (at 20°C)		2330mAh
Capacity (at 25°C)		Min.2380mAh
		Typ.2500mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.35V
Charging Current		Std. 1190mA
Charging Time		4.0hrs.
Ambient Temperature	Charge	0~+45°C
	Discharge	-20~+60°C
	Storage	-20~+50°C
Weight (Max.)		40.5g
Dimensions (Max.) * without tube	(D)	16.39mm
	(H)	64.90mm
Volumetric Energy Density		630Wh/l
Gravimetric Energy Density		213Wh/kg


Discharged State after Assembling

*When designing a battery pack, get the precise information on a cell battery drawing


Discharge Rate Characteristics for UR16650ZTA

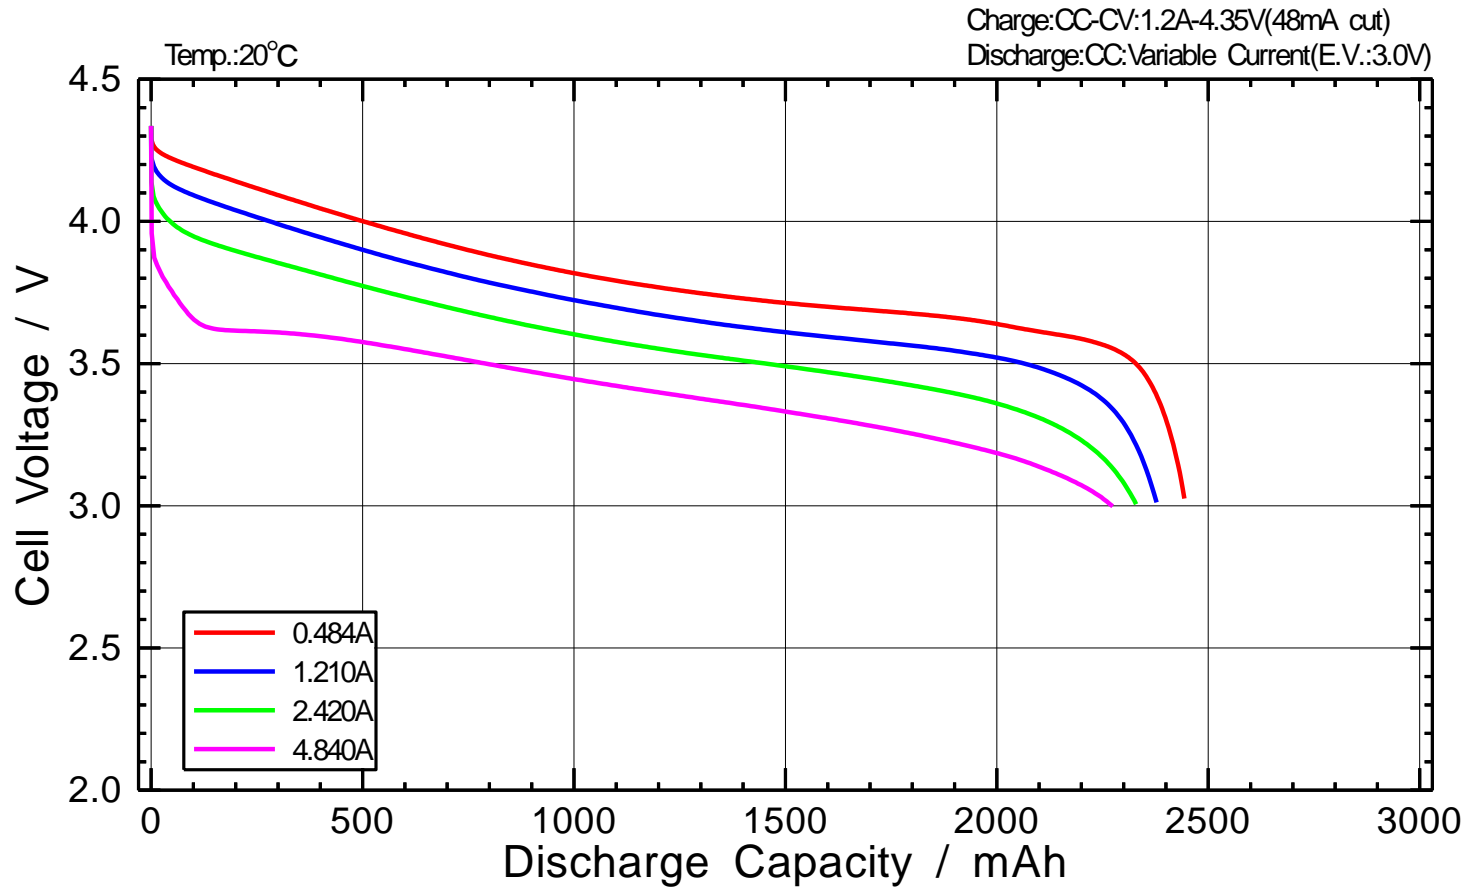

Discharge Temperature Characteristics for UR16650ZTA

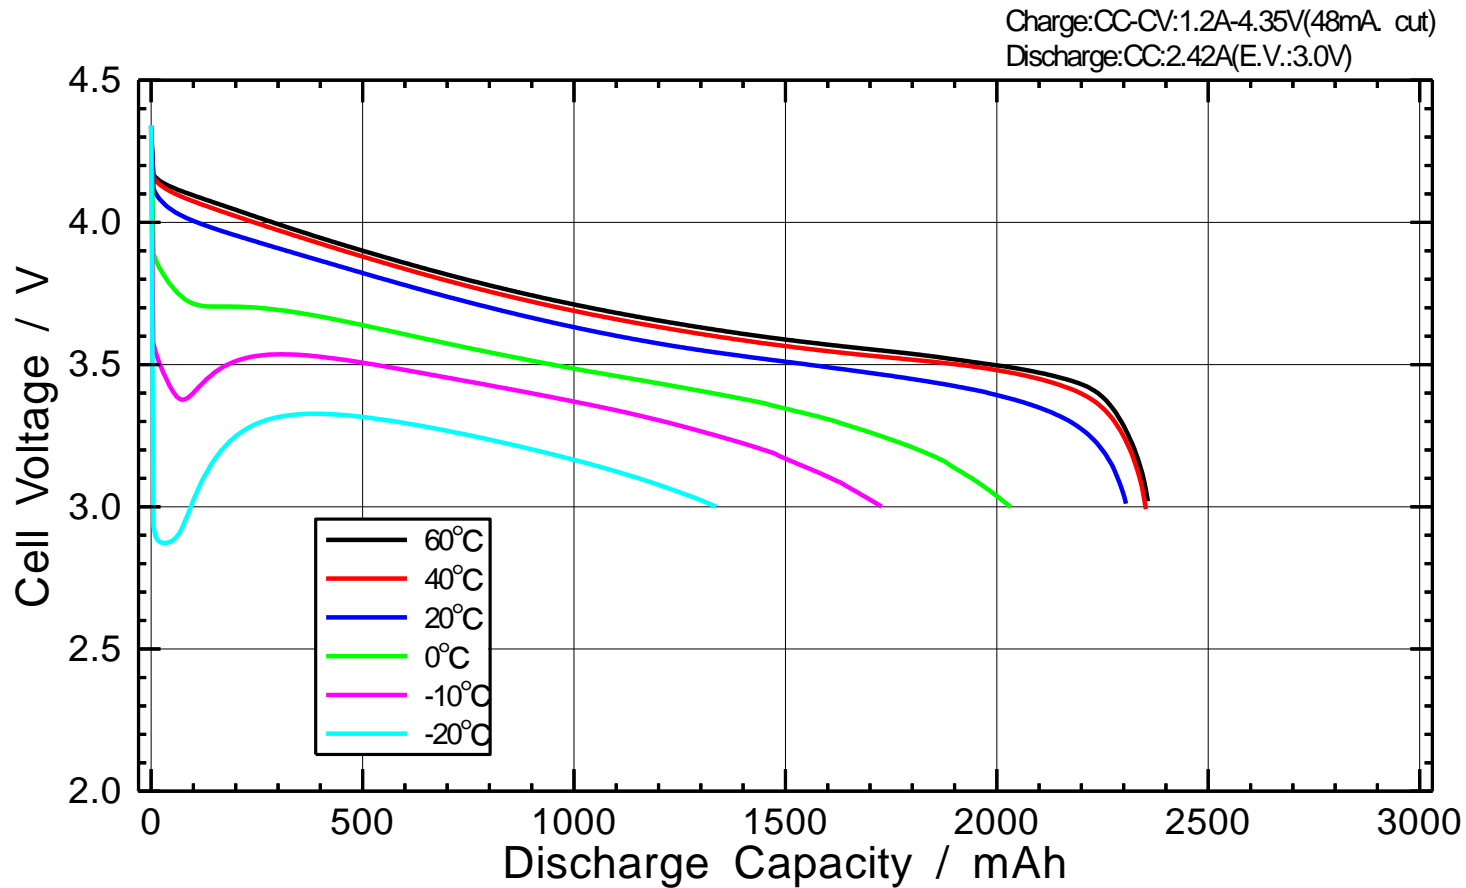

Charge Characteristics for UR16650ZTA

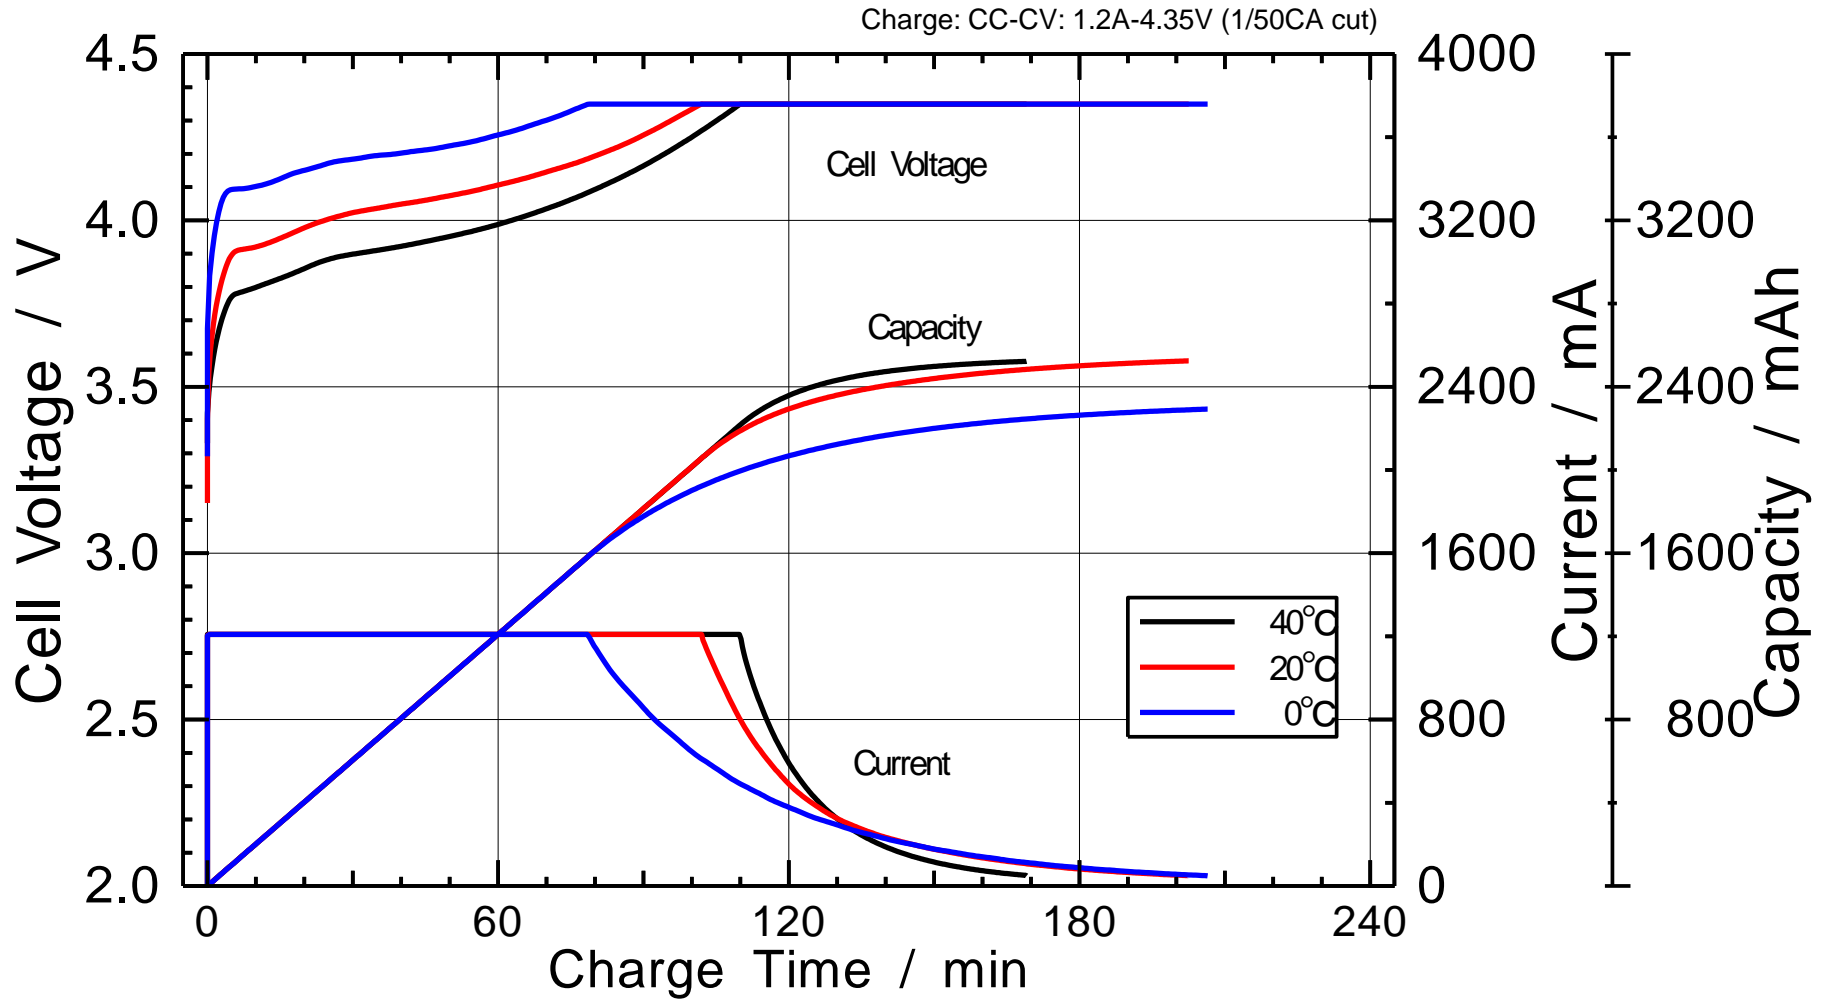

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Packs](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[2280309-1](#) [R101-B](#) [4114 210 501](#) [4120 210 501](#) [4600 726 406](#) [4610 726 406](#) [312G-U1](#) [55615703012](#) [3LR12](#) [4103 210 392](#) [4103 210 394](#)
[4106 210 392](#) [4106 210 394](#) [4223 210 501](#) [4606 726 406](#) [4607 726 406](#) [ZA13](#) [LR03/AAA/MN2400\(K4\)](#) [LR03 MAXELL S4](#) [LR1130](#)
[MAXELL B10](#) [LR14-MN1400-C K2](#) [LR1/910A](#) [LR41 MAXELL B10](#) [LR43](#) [LR43 MAXELL B10](#) [LR6 MAXELL S4](#) [11012](#) [E23A](#) [E90](#)
[625302](#) [625304](#) [637871](#) [638006](#) [6LF22/9V/MN1604\(K1\)C&B](#) [6LF22/9V/MN1604 PLUS](#) [6LR61](#) [SR626SW MAXELL](#) [SR920SW](#)
[MAXELL](#) [7K67 J](#) [55615303059](#) [GP14A S2](#) [GP15E](#) [GP1604GLF-2UE1](#) [GP 1604 ULTRA PLUS](#) [23733](#) [10 ET](#) [675 ET](#) [11A B5](#) [A544](#) [A76-](#)
[U10](#)