


## LOW OFFSET VOLTAGE, LOW DRIFT OPERATIONAL AMPLIFIER

### ■ GENERAL DESCRIPTION


The NJM OP-07 is ultra-low input offset voltage and bias current, low drift and high gain operational amplifier with internal frequency compensation.

The NJM OP-07 is suitable for a precision instrumental amplifier.


### ■ PACKAGE OUTLINE



NJMOP-07D



NJMOP-07M




NJMOP-07E

### ■ FEATURES

- Low  $V_{IO}$  (60 $\mu$ V typ.)
- Low  $I_B$  (1.8nA typ.)
- Low Drift (unnull 0.5 $\mu$ V/ $^{\circ}$ C typ.)  
(null 0.4 $\mu$ V/ $^{\circ}$ C typ.)  
(0.4 $\mu$ V/ $M_o$  typ.)
- Wide Operating Voltage ( $\pm$ 3V $\sim$  $\pm$ 22V)
- Package Outline DIP8, DMP8, SOP8 JEDEC 150mil
- Bipolar Technology

### ■ PIN CONFIGURATION



NJMOP-07D


NJMOP-07M

NJMOP-07E

#### PIN FUNCTION

1.  $V_{IO}$  Trim
2. -INPUT
3. +INPUT
4.  $V^-$
5. NC
6. OUTPUT
7.  $V^+$
8.  $V_{IO}$  Trim

### ■ EQUIVALENT CIRCUIT

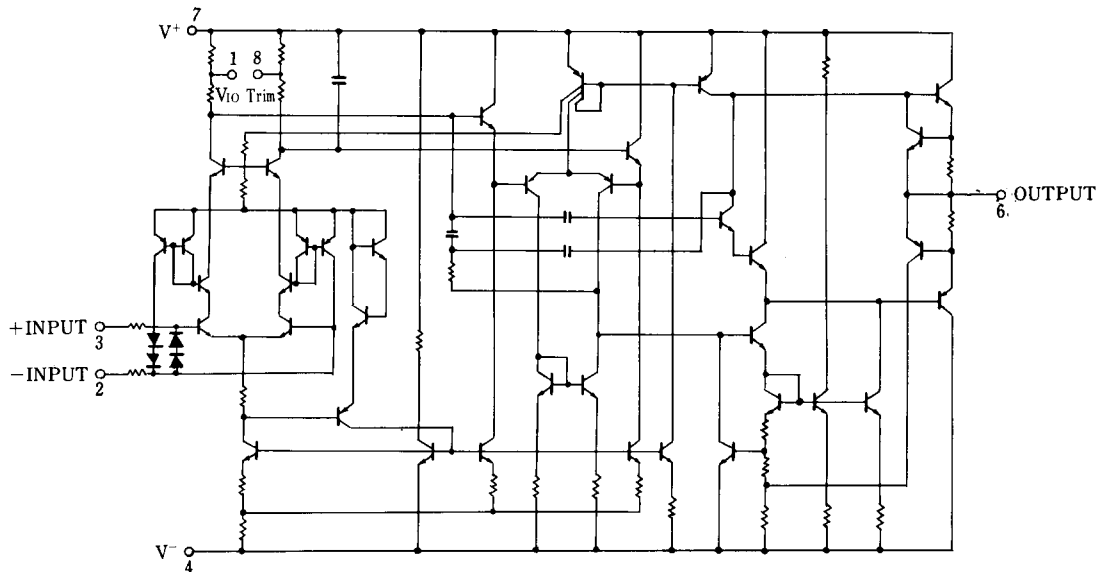

# NJMOP-07

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+ / V^-$	$\pm 22$	V
Input Voltage	$V_1$	$\pm 22$ ( note1 )	V
Differential Input Voltage	$V_{ID}$	$\pm 30$	V
Power Dissipation	$P_D$	( DIP8 ) 500( note2 ) ( DMP8 ) 300( note2 ) / 430( note3 ) ( SOP8 ) 300 ( note2 ) / 640( note3 )	mW
Storage Temperature Range	$T_{stg}$	-40~+125	°C
Operating Temperature Range	$T_{opr}$	-40~+85	°C
Output Current		continuous	

( note1 ) For supply voltage less than  $\pm 22V$ , the absolute maximum input voltage is equal to the supply voltage.

( note2 ) Device itself.

( note3 ) Mounted on the EIA/JEDEC standard board (76.2×114.3×1.6mm, two layer, FR-4).

## ■ ELECTRICAL CHARACTERISTICS

( Ta=+25°C,  $V^+ / V^- = \pm 15V$  )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	$V_{IO}$		-	60	150	$\mu V$
Long Term Stability		( note4,5 )	-	0.4	2	$\mu V / M_0$
Input Offset Current	$I_{IO}$		-	0.8	6	nA
Input Bias Current	$I_B$		-	$\pm 1.8$	$\pm 7$	nA
Open Loop Output Resistance	$R_O$	$V_O=0, I_O=0$	-	60	-	$\Omega$
Input Resistance	$R_{ID}$	( Differential Mode )	8	33	-	M $\Omega$
Input Resistance	$R_{IC}$	( Common Mode )	-	120	-	G $\Omega$
Input Common Mode Voltage Range	$V_{ICM}$		$\pm 13$	$\pm 14$	-	V
Common Mode Rejection Ratio	CMR	$V_{CM} = \pm 13V$	100	120	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+ / V^- = \pm 3V \sim \pm 18V$	90	104	-	dB
Large Signal Voltage Gain 1	$AV_1$	$R_L \geq 2k\Omega, V_O = \pm 10V$	101.5	112.0	-	dB
Large Signal Voltage Gain 2	$AV_2$	$R_L = 500\Omega, V_O = \pm 0.5V, V^+ / V^- = \pm 3V$	100.0	112.0	-	dB
Maximum Output Voltage 1	$V_{OM1}$	$R_L \geq 10k\Omega$	$\pm 12$	$\pm 13$	-	V
Maximum Output Voltage 2	$V_{OM2}$	$R_L > 2k\Omega$	$\pm 11.5$	$\pm 12.8$	-	V
Maximum Output Voltage 3	$V_{OM3}$	$R_L > 1k\Omega$	-	$\pm 12$	-	V
Slew Rate	SR	$R_L \geq 2k\Omega$	-	0.17	-	V/ $\mu S$
Unity Gain Bandwidth	$f_T$	$A_{VCL} = 1$	-	0.5	-	MHz
Operating Current 1	$I_{CC1}$	$V^+ / V^- = \pm 15V$	-	2.7	5.0	mA
Operating Current 2	$I_{CC2}$	$V^+ / V^- = \pm 3V$	-	0.67	1.3	mA
Offset Adjustment Range		$R_P = 20k\Omega$	-	$\pm 4$	-	mV
Equivalent Input Noise Voltage	$V_{NI}$	0.1Hz~10Hz ( note5 )	-	0.38	0.65	$\mu V_{P-P}$
Equivalent Input Noise Voltage 1	$e_{n1}$	$f_0 = 10Hz$ ( note5 )	-	10.5	20	nV/ $\sqrt{Hz}$
Equivalent Input Noise Voltage 2	$e_{n2}$	$f_0 = 100Hz$ ( note5 )	-	10.2	13.5	nV/ $\sqrt{Hz}$
Equivalent Input Noise Voltage 3	$e_{n3}$	$f_0 = 1kHz$ ( note5 )	-	9.8	11.5	nV/ $\sqrt{Hz}$
Equivalent Input Noise Current	$I_{NI}$	0.1Hz~10Hz ( note5 )	-	15	35	pA $\sqrt{Hz}$
Equivalent Input Noise Current 1	$i_{n1}$	$f_0 = 10Hz$ ( note5 )	-	0.35	0.9	pA/ $\sqrt{Hz}$
Equivalent Input Noise Current 2	$i_{n2}$	$f_0 = 100Hz$ ( note5 )	-	0.15	0.27	pA/ $\sqrt{Hz}$
Equivalent Input Noise Current 3	$i_{n3}$	$f_0 = 1kHz$ ( note5 )	-	0.13	0.18	pA/ $\sqrt{Hz}$

## ■ ELECTRICAL CHARACTERISTICS


(  $0^{\circ}\text{C} \leq T_a \leq 70^{\circ}\text{C}, V^+ / V^- = \pm 15\text{V}$  )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	$V_{IO}$		-	85	250	$\mu\text{V}$
Average $V_{IO}$ Drift ( unnull )		( note5 )	-	0.5	1.8	$\mu\text{V}/^{\circ}\text{C}$
Average $V_{IO}$ Drift ( null )		$R_p = 20\text{k}\Omega$ , ( note5 )	-	0.4	1.6	$\mu\text{V}/^{\circ}\text{C}$
Input Offset Current	$I_{IO}$		-	1.6	8	nA
Average $I_{IO}$ Drift		( note5 )	-	12	50	$\text{pA}/^{\circ}\text{C}$
Input Bias Current	$I_{IB}$		-	$\pm 2.2$	$\pm 9$	nA
Average $I_{IB}$ Drift		( note5 )	-	18	50	$\text{pA}/^{\circ}\text{C}$
Input Common Mode Voltage Range	$V_{ICM}$		$\pm 13$	$\pm 13.5$	-	V
Common Mode Rejection Ratio	CMR	$V_{CM} = \pm 13\text{V}$	97	120	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+ / V^- = \pm 3\text{V} \sim \pm 18\text{V}$	86	120	-	dB
Voltage Gain	$A_V$	$R_L \geq 2\text{k}\Omega, V_O = \pm 10\text{V}$	100	400	-	V/mV
Maximum Output Voltage	$V_{OM}$	$R_L \geq 2\text{k}\Omega$	$\pm 11$	$\pm 12.6$	-	V


( note 4 ) Long Term Stability refers to the average trend line of  $V_{IO}$  vs. time over extended periods after the first 30 days of operation.

( note 5 ) According to the evaluation by NJRC, more than 90% of all these products can be guaranteed.

## ■ OFFSET ADJUSTMENT METHOD

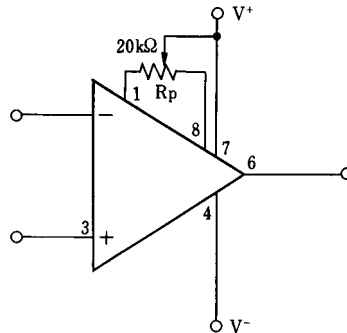







For making low sensitivity of change in the input offset voltage against resistance regulation of potentiometer  
( Easy case of offset adjustment )

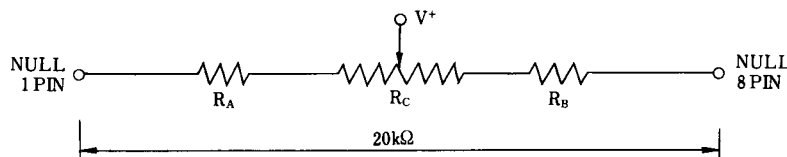

\*  $R_A, R_B$  Fixed  $7.5\text{k}\Omega$ ,  $R_C$  adjustable  $5.0\text{k}\Omega$


\*  $R_A, R_B, R_C$  are metalfilm resistors,  $R_C$  is more than 10 times winding.

## ■ TYPICAL CHARACTERISTICS

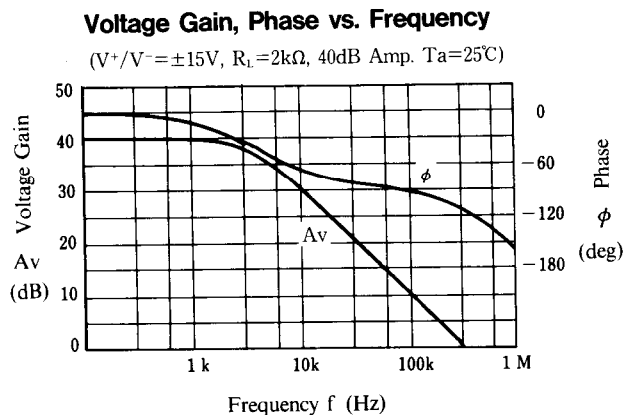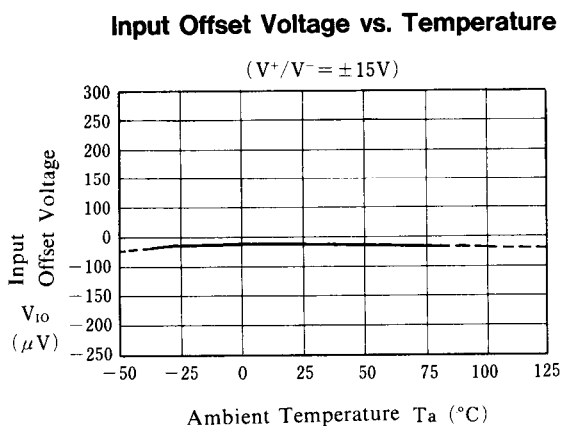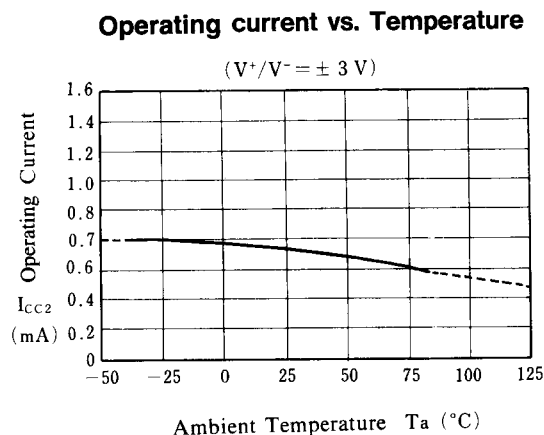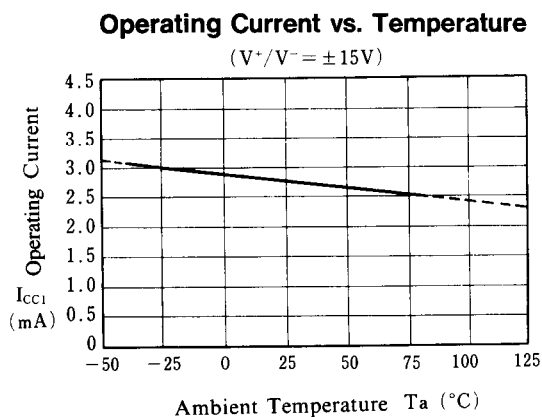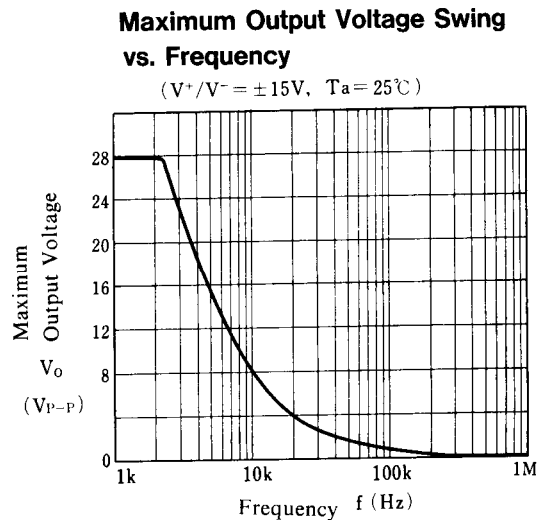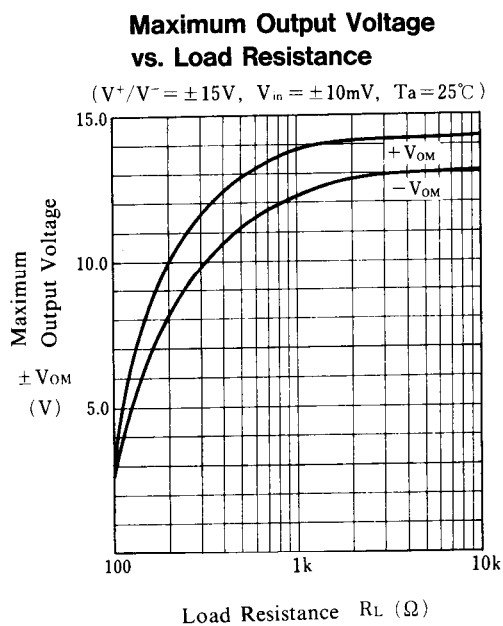


## ■ TYPICAL CHARACTERISTICS


### Input Bias Current vs. Temperature

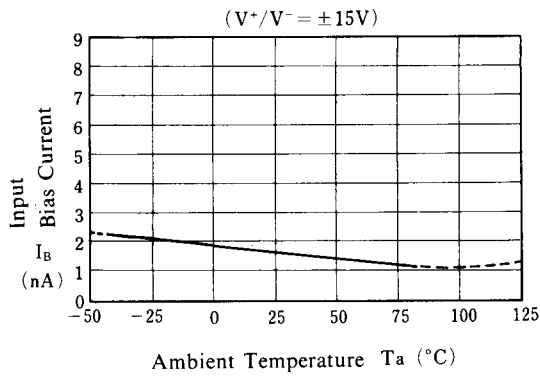


### Input Offset Current vs. Temperature

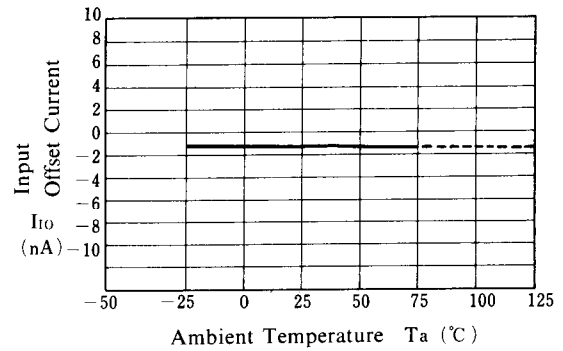


### Maximum Output Voltage vs. Temperature

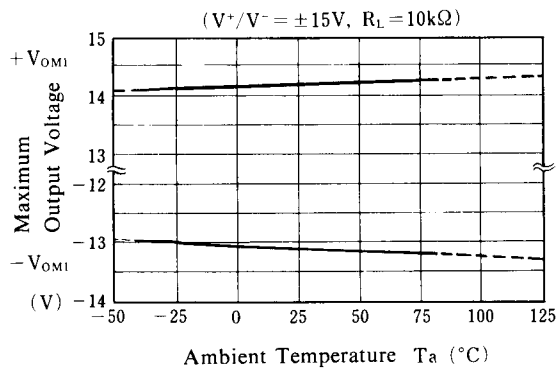

### Maximum Output Voltage vs. Temperature

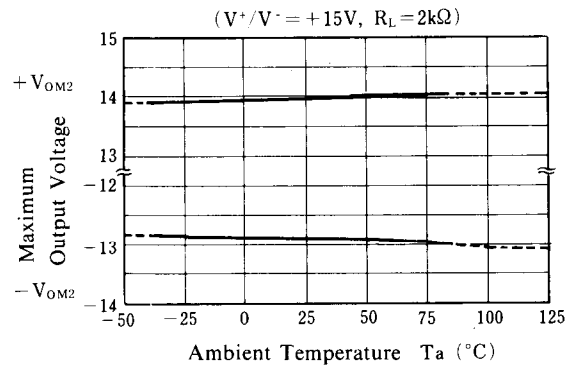

### Power Dissipation vs. Supply Voltage

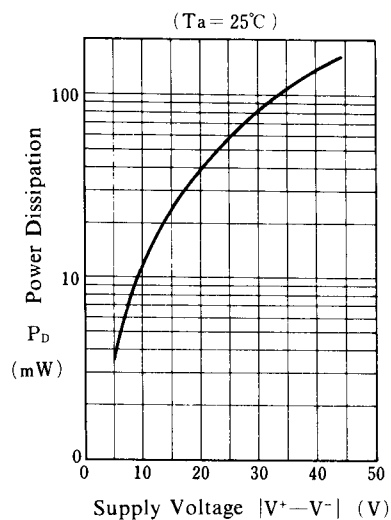

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Precision Amplifiers](#) category:*

*Click to view products by [JRC](#) manufacturer:*

Other Similar products are found below :

[561681F](#) [NCS20166SN2T1G](#) [NCV21802DMR2G](#) [NCS21802MUTBG](#) [OPA209AIDR](#) [TLC27L7CP](#) [TLV2473CDR](#) [LMP2234AMA/NOPB](#)  
[LMP7707MA/NOPB](#) [LMP2231AMAE/NOPB](#) [LMP2234AMTE/NOPB](#) [LMP8672MA/NOPB](#) [LMC6022IM/NOPB](#) [LMC6024IM/NOPB](#)  
[LMC6081IMX/NOPB](#) [LMP2011MA/NOPB](#) [LMP2231AMFE/NOPB](#) [LMP2232BMA/NOPB](#) [LMP2234AMAE/NOPB](#) [LMP7715MFE/NOPB](#)  
[LMP7717MAE/NOPB](#) [LMV2011MA/NOPB](#) [LT1013DDR](#) [TL034ACDR](#) [TLC2201AMDG4](#) [MCP6061T-E/MNY](#) [TS507IYLT](#) [TS9222IYDT](#)  
[OA2ZHA22Q](#) [TLV2472QDRQ1](#) [TLC4502IDR](#) [TLC27M2ACP](#) [TLC2652Q-8DG4](#) [OPA2107APG4](#) [TL054AIDR](#) [AD8619WARZ-R7](#)  
[TLC272CD](#) [LT1672IMS8#PBF](#) [LT1996IDD#PBF](#) [LT6010CDD#PBF](#) [LTC6241IDD#PBF](#) [AD8572ARUZ-REEL](#) [LT1077CN8#PBF](#)  
[LTC1050CN8#PBF](#) [OP777ARMZ-REEL](#) [LT6220IS5#TRMPBF](#) [LT1211IS8#PBF](#) [LT1124CS8#PBF](#) [TL054IDR](#) [LT1013CDR](#)