


## FEATURES


- High current gain
- Excellent  $h_{FE}$  linearity
- Low noise between 30Hz and 15kHz
- For AF input stages and driver applications



**SOT-23**

## APPLICATIONS

- General purpose switching and amplification



## ORDERING INFORMATION


Type No.	Marking	Package Code
BC846A/B	1A/1B	SOT-23
BC847A/B/C	1E/1F/1G	SOT-23
BC848A/B/C	1J/1K/1L	SOT-23

## MAXIMUM RATING @ $T_a=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter		Value	Units
$V_{CBO}$	Collector-Base Voltage	BC846	80	V
		BC847	50	
		BC848	30	
$V_{CEO}$	Collector-Emitter Voltage	BC846	65	V
		BC847	45	
		BC848	30	
$V_{EBO}$	Emitter-Base Voltage	BC846	6	V
		BC847	6	
		BC848	5	
$I_C$	Collector Current -Continuous		0.1	A
$P_C$	Collector Dissipation		250	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient		500	$^{\circ}\text{C}/\text{W}$
$T_J, T_{STG}$	Junction and Storage Temperature		-55 to +150	$^{\circ}\text{C}$


**ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage BC846 BC847 BC848	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	80 50 30			V
Collector-emitter breakdown voltage BC846 BC847 BC848	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	65 45 30			V
Emitter-base breakdown voltage BC846 BC847 BC848	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6 6 5			V
Collector-base cut-off current	$I_{CBO}$	$V_{CB}=30V, I_E=0$ $V_{CB}=30V, I_E=0, T_j=150^\circ C$			15 5	nA uA
Emitter-base cut-off current	$I_{EBO}$	$V_{EB}=5V, I_C=0$			100	nA
Collector-emitter cut-off current	$I_{CEO}$	$V_{CE}=30V, I_B=0$			1	mA
DC current gain BC846A,847A,848A BC846B,847B,848B BC847C,848C	$h_{FE}$	$V_{CE}=5V, I_C=10uA$		110 250 480		
DC current gain BC846A,847A,848A BC846B,847B,848B BC847C,848C	$h_{FE}$	$V_{CE}=5V, I_C=2mA$	110 200 420		220 450 800	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=10mA, I_B=0.5mA$ $I_C=100mA, I_B=5mA$		0.09 0.2	0.25 0.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=10mA, I_B=0.5mA$ $I_C=100mA, I_B=5mA$		0.7 0.9	0.9 1.1	V
Base-emitter voltage	$V_{BE(on)}$	$I_C=2mA, V_{CE}=5V$ $I_C=10mA, V_{CE}=5V$	0.58	0.66	0.7 0.77	V
Collector capacitance	$C_C$	$V_{CB}=10V, I_E=I_C=0,$ $f=1MHz$		2.5		pF
Transition frequency	$f_T$	$V_{CE}=5V, I_C=10mA$ $f=100MHz$	100			MHz

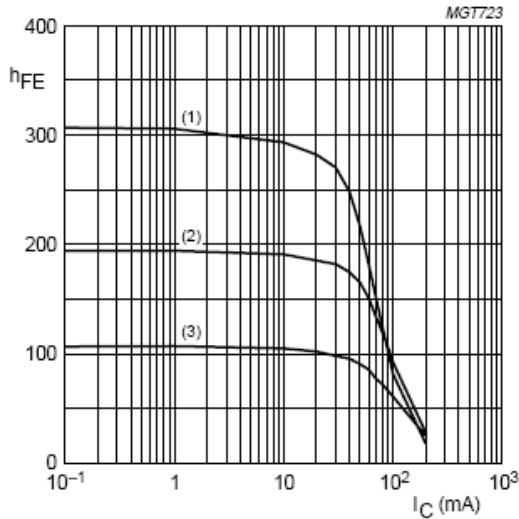TYPICAL CHARACTERISTICS @  $T_a=25^\circ\text{C}$  unless otherwise specified


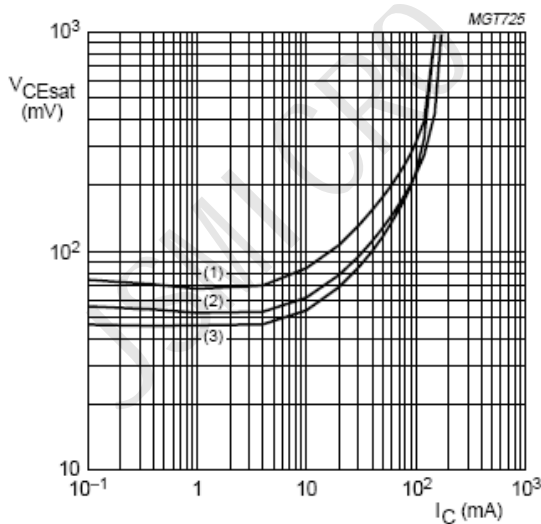
BC846A;  $V_{CE} = 5\text{ V}$ .  
 (1)  $T_{amb} = 150^\circ\text{C}$ .  
 (2)  $T_{amb} = 25^\circ\text{C}$ .  
 (3)  $T_{amb} = -55^\circ\text{C}$ .

Fig.1 DC current gain as a function of collector current; typical values.

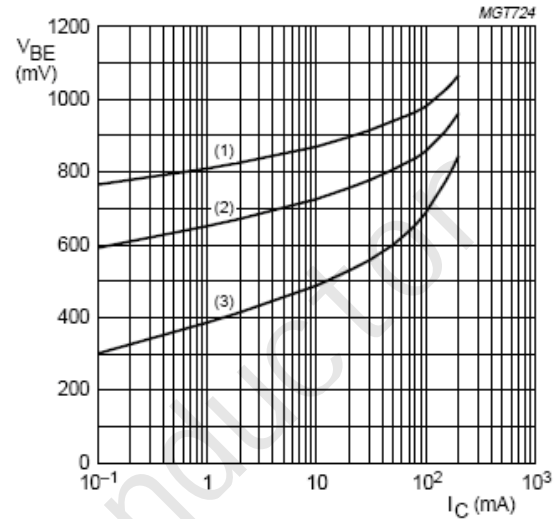


BC846A;  $V_{CE} = 5\text{ V}$ .  
 (1)  $T_{amb} = -55^\circ\text{C}$ .  
 (2)  $T_{amb} = 25^\circ\text{C}$ .  
 (3)  $T_{amb} = 150^\circ\text{C}$ .

Fig.2 Base-emitter voltage as a function of collector current; typical values.




BC846A;  $I_C/I_B = 20$ .  
 (1)  $T_{amb} = 150^\circ\text{C}$ .  
 (2)  $T_{amb} = 25^\circ\text{C}$ .  
 (3)  $T_{amb} = -55^\circ\text{C}$ .

Fig.3 Collector-emitter saturation voltage as a function of collector current; typical values.

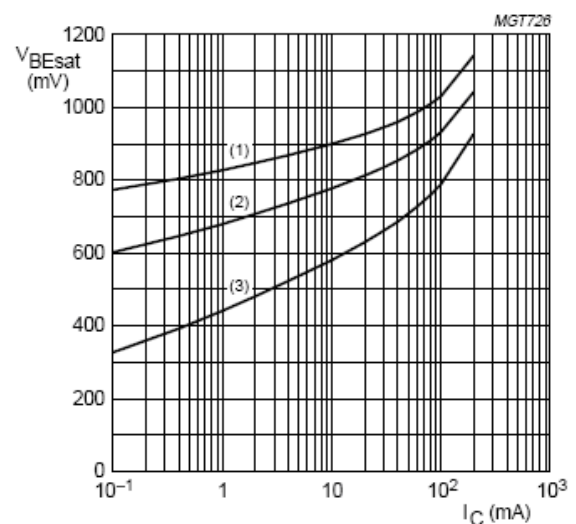


BC846A;  $I_C/I_B = 10$ .  
 (1)  $T_{amb} = -55^\circ\text{C}$ .  
 (2)  $T_{amb} = 25^\circ\text{C}$ .  
 (3)  $T_{amb} = 150^\circ\text{C}$ .

Fig.4 Base-emitter saturation voltage as a function of collector current; typical values.

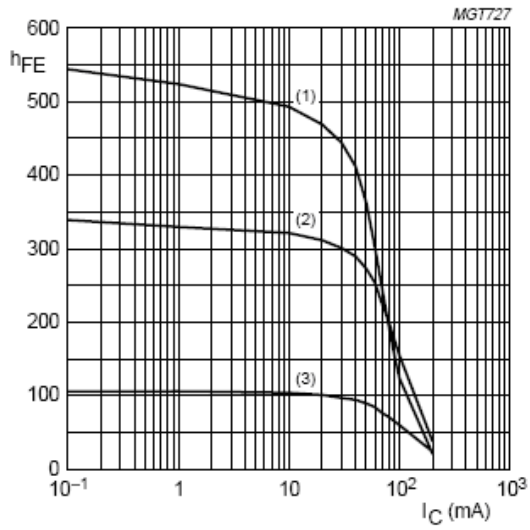


BC847B;  $V_{CE} = 5\text{ V}$ .  
(1)  $T_{amb} = 150\text{ }^{\circ}\text{C}$ .  
(2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .  
(3)  $T_{amb} = -55\text{ }^{\circ}\text{C}$ .

Fig.5 DC current gain as a function of collector current; typical values.

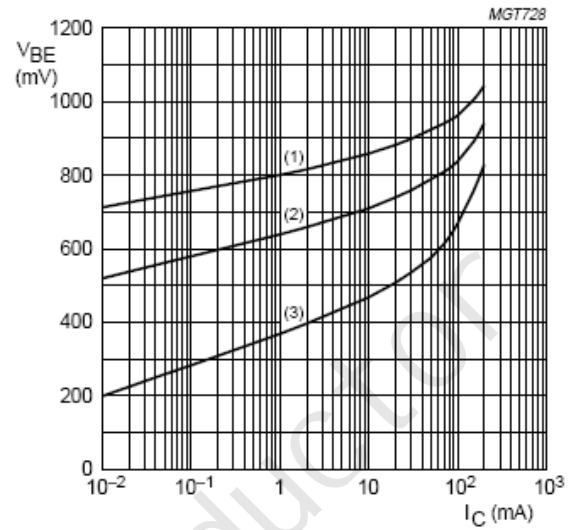


BC847B;  $V_{CE} = 5\text{ V}$ .  
(1)  $T_{amb} = -55\text{ }^{\circ}\text{C}$ .  
(2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .  
(3)  $T_{amb} = 150\text{ }^{\circ}\text{C}$ .

Fig.6 Base-emitter voltage as a function of collector current; typical values.

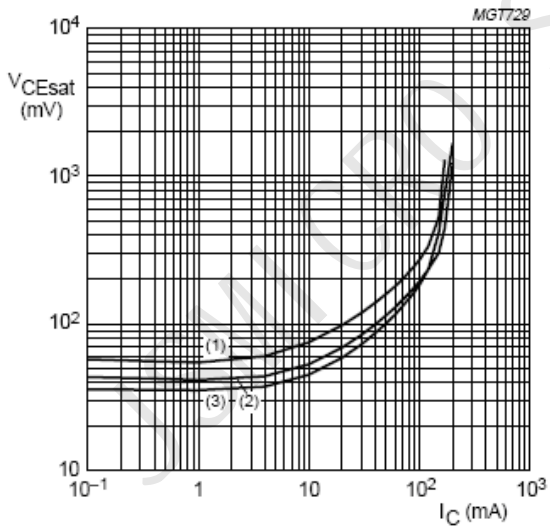


BC847B;  $I_C/I_B = 20$ .  
(1)  $T_{amb} = 150\text{ }^{\circ}\text{C}$ .  
(2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .  
(3)  $T_{amb} = -55\text{ }^{\circ}\text{C}$ .

Fig.7 Collector-emitter saturation voltage as a function of collector current; typical values.

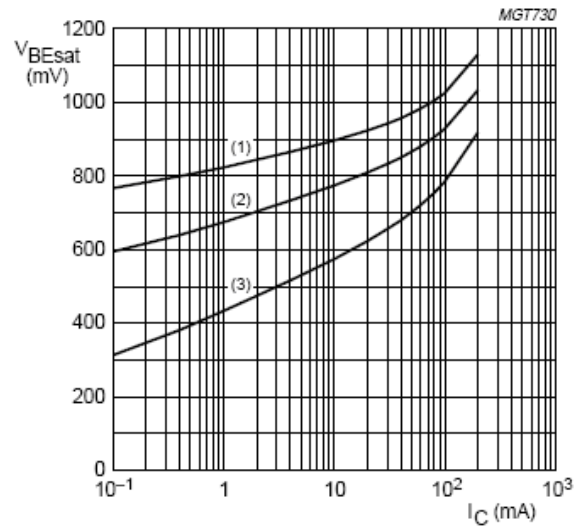


BC847B;  $I_C/I_B = 10$ .  
(1)  $T_{amb} = -55\text{ }^{\circ}\text{C}$ .  
(2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .  
(3)  $T_{amb} = 150\text{ }^{\circ}\text{C}$ .

Fig.8 Base-emitter saturation voltage as a function of collector current; typical values.

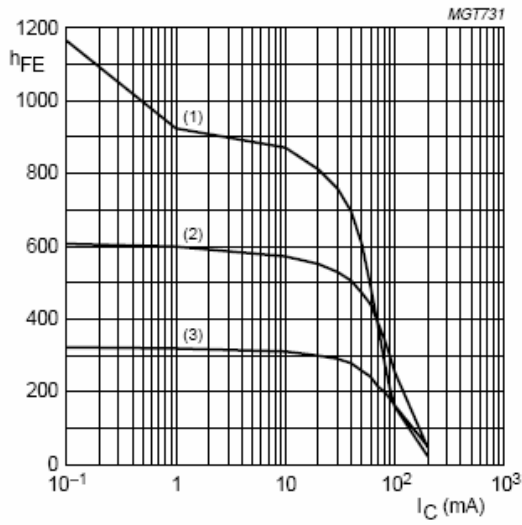


BC847C;  $V_{CE} = 5\text{ V}$ .  
 (1)  $T_{amb} = 150\text{ }^{\circ}\text{C}$ .  
 (2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .  
 (3)  $T_{amb} = -55\text{ }^{\circ}\text{C}$ .

Fig.9 DC current gain as a function of collector current; typical values.

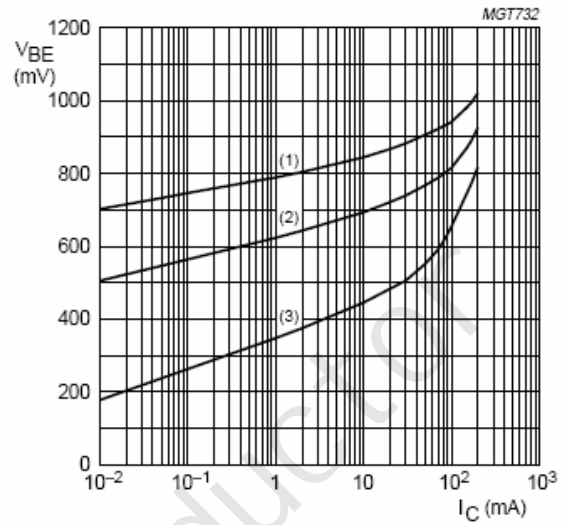


BC847C;  $V_{CE} = 5\text{ V}$ .  
 (1)  $T_{amb} = -55\text{ }^{\circ}\text{C}$ .  
 (2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .  
 (3)  $T_{amb} = 150\text{ }^{\circ}\text{C}$ .

Fig.10 Base-emitter voltage as a function of collector current; typical values.

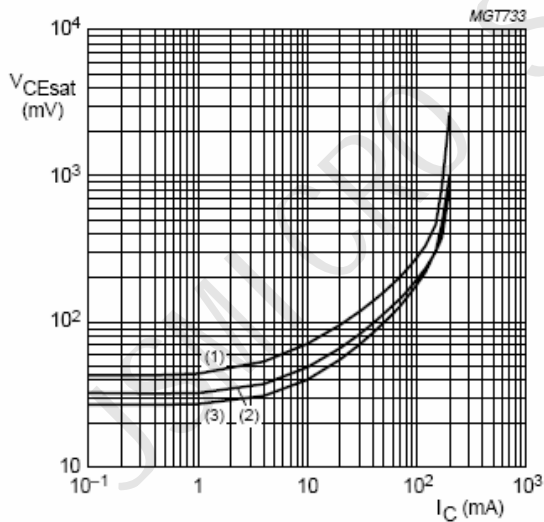

BC847C;  $I_C/I_B = 20$ .  
 (1)  $T_{amb} = 150\text{ }^{\circ}\text{C}$ .  
 (2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .  
 (3)  $T_{amb} = -55\text{ }^{\circ}\text{C}$ .

Fig.11 Collector-emitter saturation voltage as a function of collector current; typical values.

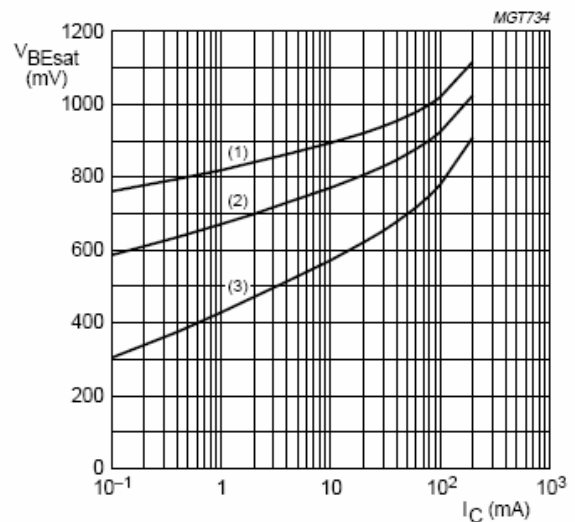


BC847C;  $I_C/I_B = 10$ .  
 (1)  $T_{amb} = -55\text{ }^{\circ}\text{C}$ .  
 (2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .  
 (3)  $T_{amb} = 150\text{ }^{\circ}\text{C}$ .

Fig.12 Base-emitter saturation voltage as a function of collector current; typical values.

## PACKAGE OUTLINE


Plastic surface mounted package

SOT-23

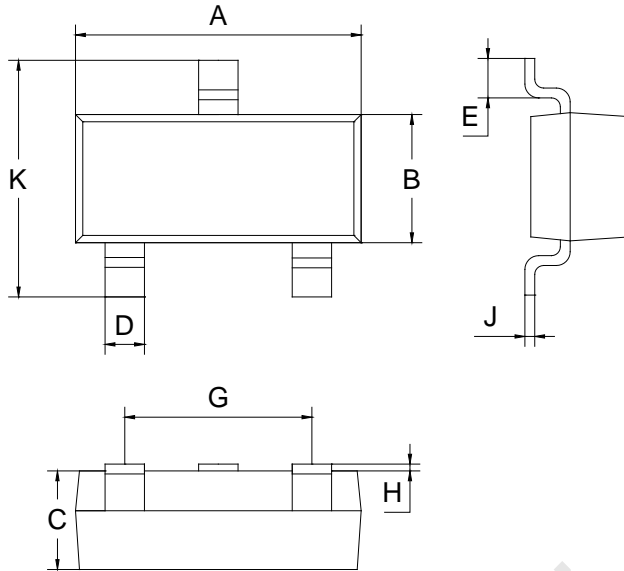

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60
All Dimensions in mm		

## SOLDERING FOOTPRINT

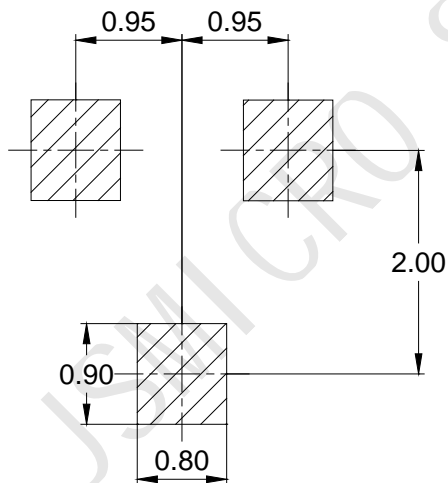

Unit: mm

## PACKAGE INFORMATION

Device	Package	Shipping
BC846/847/848	SOT-23	3000 pcs / Tape & Reel

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [JSMSEMI manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)  
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)  
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)  
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)  
[MMDT3946FL3-7](#) [2N4240](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#)