




## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

### Product Description

The KXTIA is a tri-axis +/-2g, +/-4g or +/-8g silicon micromachined accelerometer with integrated orientation, tap/double tap, and activity detecting algorithms. The sense element is fabricated using Kionix's proprietary plasma micromachining process technology. Acceleration sensing is based on the principle of a differential capacitance arising from acceleration-induced motion of the sense element, which further utilizes common mode cancellation to decrease errors from process variation, temperature, and environmental stress. The sense element is hermetically sealed at the wafer level by bonding a second silicon lid wafer to the device using a glass frit. A separate ASIC device packaged with the sense element provides signal conditioning, and intelligent user-programmable application algorithms. The accelerometer is delivered in a 3 x 3 x 0.9 mm LGA plastic package operating from a 1.8 – 3.6V DC supply. Voltage regulators are used to maintain

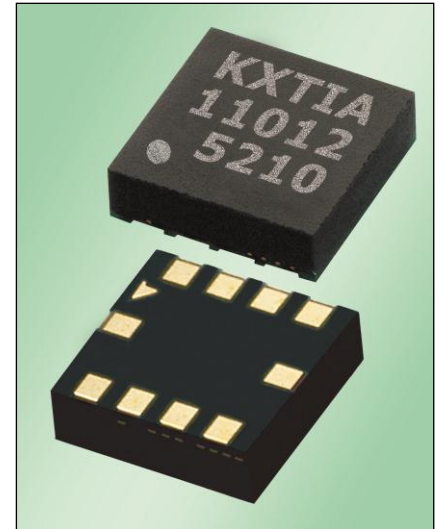

constant internal operating voltages over the range of input supply voltages. This results in stable operating characteristics over the range of input supply voltages and virtually undetectable ratiometric error. The SPI digital protocol is used to communicate with the chip to configure and check for updates to the orientation, Directional Tap™ detection and activity monitoring algorithms.




# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Functional Diagram

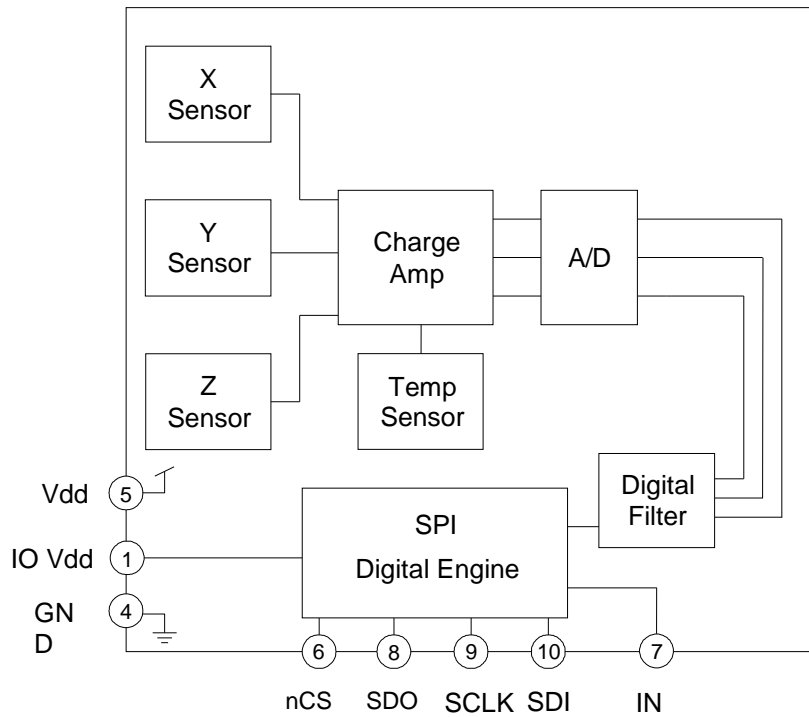



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## Product Specifications

**Table 1. Mechanical**

(specifications are for operation at 2.6V and T = 25C unless stated otherwise)

| Parameters                                 |                         | Units    | Min | Typical               | Max  |
|--|-------------------------|----------|-----|-----------------------|------|
| Operating Temperature Range                |                         | °C       | -40 | -                     | 85   |
| Zero-g Offset                              |                         | mg       | -   | ±25                   | ±125 |
| Zero-g Offset Variation from RT over Temp. |                         | mg/°C    |     | 0.7 (xy)<br>0.4 (z)   |      |
| Sensitivity (12-bit) <sup>1</sup>          | GSEL1=0, GSEL0=0 (± 2g) | counts/g | 988 | 1024                  | 1060 |
|  | GSEL1=0, GSEL0=1 (± 4g) |          | 494 | 512                   | 530  |
|  | GSEL1=1, GSEL0=0 (± 8g) |          | 247 | 256                   | 265  |
| Sensitivity (8-bit) <sup>1</sup>           | GSEL1=0, GSEL0=0 (± 2g) | counts/g | 61  | 64                    | 67   |
|  | GSEL1=0, GSEL0=1 (± 4g) |          | 30  | 32                    | 34   |
|  | GSEL1=1, GSEL0=0 (± 8g) |          | 15  | 16                    | 17   |
| Sensitivity Variation from RT over Temp.   |                         | %/°C     |     | 0.01 (xy)<br>0.03 (z) |      |
| Self Test Output change on Activation      |                         | g        |     | 0.7 (xy)<br>0.5 (z)   |      |
| Mechanical Resonance (-3dB) <sup>2</sup>   |                         | Hz       |     | 3500 (xy)<br>1800 (z) |      |
| Non-Linearity                              |                         | % of FS  |     | 0.6                   |      |
| Cross Axis Sensitivity                     |                         | %        |     | 2                     |      |

Notes:

1. Resolution and acceleration ranges are user selectable via SPI.
2. Resonance as defined by the damped mechanical sensor.



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

**Table 2. Electrical**

(specifications are for operation at 2.6V and T = 25C unless stated otherwise)

| Parameters                                 |  | Units | Min                   | Typical | Max                   |
|--|--|-------|-----------------------|---------|-----------------------|
| Supply Voltage (V <sub>dd</sub> )          | Operating                                  | V     | 1.71                  | 2.6     | 3.6                   |
| I/O Pads Supply Voltage (V <sub>IO</sub> ) |  | V     | 1.7                   |         | V <sub>dd</sub>       |
| Current Consumption                        | All On (RES = 1)                           | μA    |                       | 325     |                       |
|  | Directional Tap™<br>(RES = 0, ODR = 400Hz) |       |                       | 165     |                       |
|  | Low Power<br>(RES = 0, ODR ≤ 25Hz)         |       |                       | 100     |                       |
|  | Standby                                    |       |                       | 10      |                       |
| Output Low Voltage                         |  | V     | -                     | -       | 0.2 * V <sub>IO</sub> |
| Output High Voltage                        |  | V     | 0.8 * V <sub>IO</sub> | -       | -                     |
| Input Low Voltage                          |  | V     | -                     | -       | 0.2 * V <sub>IO</sub> |
| Input High Voltage                         |  | V     | 0.8 * V <sub>IO</sub> | -       | -                     |
| Input Pull-down Current                    |  | μA    |                       | 0       |                       |
| Start Up Time <sup>1</sup>                 | RES = 0                                    | ms    |                       | 0.050   |                       |
|  | RES = 1, ODR = 12.5Hz                      |       |                       | 81      |                       |
|  | RES = 1, ODR = 25 Hz                       |       |                       | 41      |                       |
|  | RES = 1, ODR = 50Hz                        |       |                       | 21      |                       |
|  | RES = 1, ODR = 100Hz                       |       |                       | 11      |                       |
|  | RES = 1, ODR = 200Hz                       |       |                       | 6       |                       |
|  | RES = 1, ODR = 400Hz                       |       |                       | 4       |                       |
|  | RES = 1, ODR = 800Hz                       |       |                       | 2.5     |                       |
| Power Up Time <sup>2</sup>                 |  | ms    |                       | 10      |                       |
| SPI Communication Rate                     |  | MHz   |                       |         | 20                    |
| Output Data Rate (ODR) <sup>3</sup>        |  | Hz    | 12.5                  | 50      | 800                   |
| Bandwidth (-3dB) <sup>4</sup>              | RES = 0                                    | KHz   |                       | 1.59    |                       |
|  | RES = 1                                    | Hz    |                       | ODR/2   |                       |

**Notes:**

1. Start up time is from PC1 set to valid outputs.
2. Power up time is from Vdd valid to device boot completion.
3. User selectable through SPI.
4. User selectable and dependant on ODR and RES.

|   |   |  |
|---|---|--|
|  | <b>± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications</b> | <b>PART NUMBER:</b><br><br><b>KXTIA-1006</b><br><b>Rev. 4</b><br><b>Dec-2012</b> |
|---|---|--|

**Table 3. Environmental**

| Parameters                          |                 | Units | Min  | Typical | Max                               |
|-------------------------------------|-----------------|-------|------|---------|-----------------------------------|
| Supply Voltage (V <sub>dd</sub> )   | Absolute Limits | V     | -0.5 | -       | 3.63                              |
| Operating Temperature Range         |                 | °C    | -40  | -       | 85                                |
| Storage Temperature Range           |                 | °C    | -55  | -       | 150                               |
| Mech. Shock (powered and unpowered) |                 | g     | -    | -       | 5000 for 0.5ms<br>10000 for 0.2ms |
| ESD                                 | HBM             | V     | -    | -       | 2000                              |



Caution: ESD Sensitive and Mechanical Shock Sensitive Component, improper handling can cause permanent damage to the device.



This product conforms to Directive 2002/95/EC of the European Parliament and of the Council of the European Union (RoHS). Specifically, this product does not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), or polybrominated diphenyl ethers (PBDE) above the maximum concentration values (MCV) by weight in any of its homogenous materials. Homogenous materials are "of uniform composition throughout."



This product is halogen-free per IEC 61249-2-21. Specifically, the materials used in this product contain a maximum total halogen content of 1500 ppm with less than 900-ppm bromine and less than 900-ppm chlorine.

### Soldering

Soldering recommendations are available upon request or from [www.kionix.com](http://www.kionix.com).



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Application Schematic

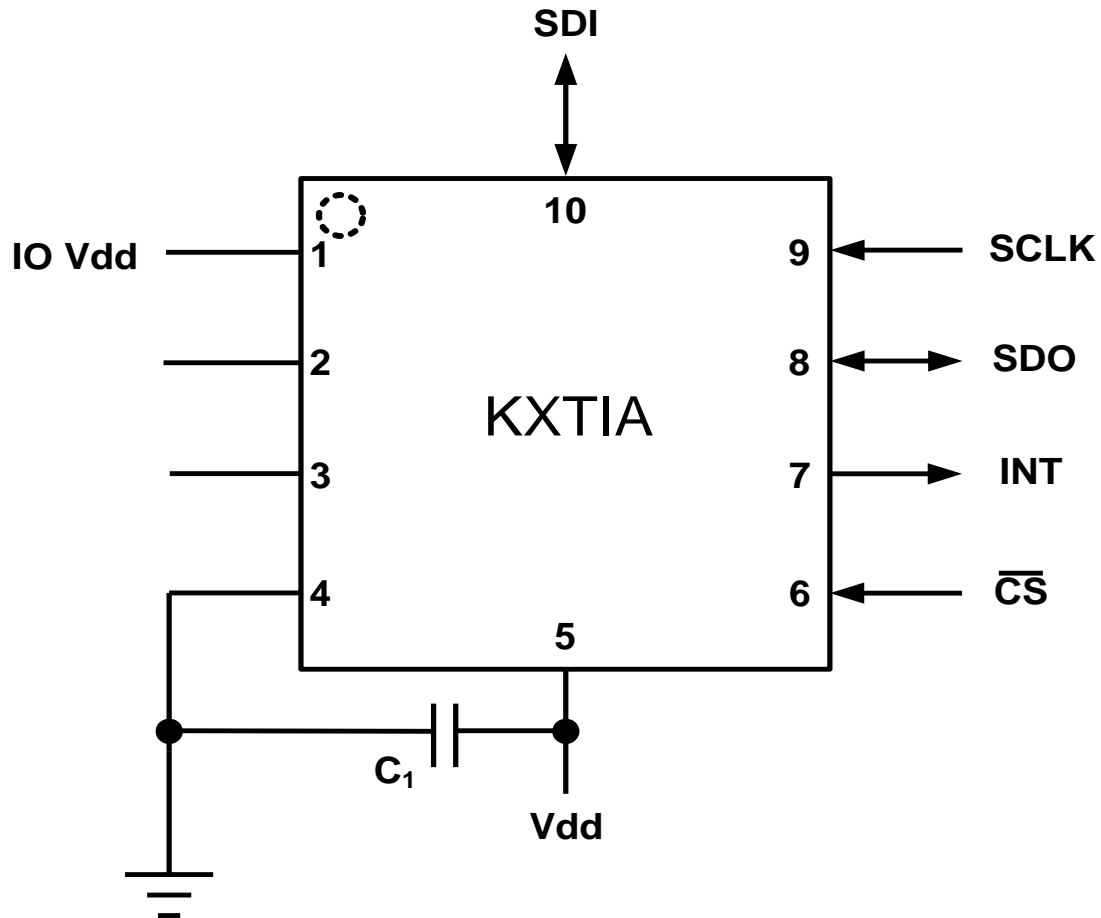


Table 4. KXTIA Pin Descriptions

| Pin | Name   | Description   |
|-----|--------|---|
| 1   | IO Vdd | The power supply input for the digital communication bus                            |
| 2   | DNC    | Reserved – Do Not Connect   |
| 3   | DNC    | Reserved – Do Not Connect   |
| 4   | GND    | Ground  |
| 5   | Vdd    | The power supply input. Decouple this pin to ground with a 0.1uF ceramic capacitor. |
| 6   | nCS    | SPI Enable  |
| 7   | INT    | Interrupt   |
| 8   | SDO    | SPI Serial Data Output  |
| 9   | SCLK   | SPI Serial Clock  |
| 10  | SDI    | SPI Serial Data Input   |



## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

### Test Specifications



#### *Special Characteristics:*

These characteristics have been identified as being critical to the customer. Every part is tested to verify its conformance to specification prior to shipment.

**Table 5. Test Specifications**

| Parameter          | Specification          | Test Conditions  |
|--------------------|------------------------|------------------|
| Zero-g Offset @ RT | 0 +/- 128 counts       | 25C, Vdd = 2.6 V |
| Sensitivity @ RT   | 1024 +/- 35.8 counts/g | 25C, Vdd = 2.6 V |





# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Package Dimensions and Orientation

3 x 3 x 0.9 mm LGA

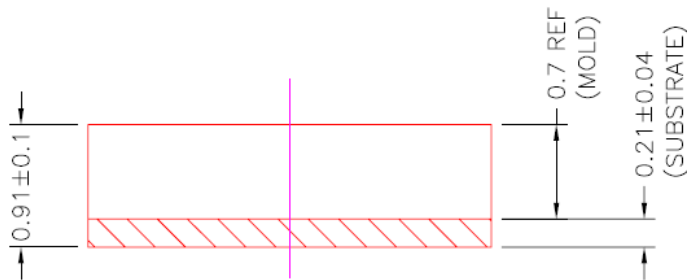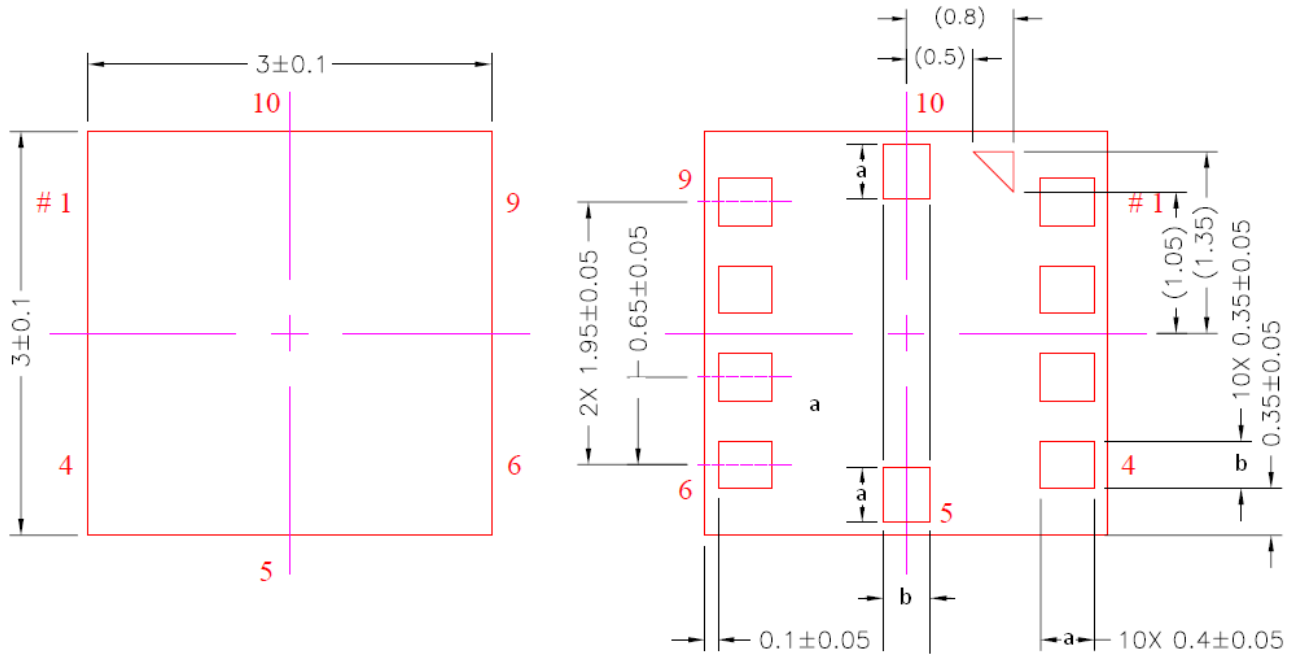

All dimensions and tolerances conform to ASME Y14.5M-1994





**± 2g / 4g / 8g Tri-axis Digital  
Accelerometer Specifications**

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**




# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012


## Orientation



When device is accelerated in +X, +Y or +Z direction, the corresponding output will increase.

### Static X/Y/Z Output Response versus Orientation to Earth's surface (1g): GSEL1=0, GSEL0=0 (± 2g)

| Position          | 1    |    | 2    |    | 3     |     | 4     |     | 5       |    | 6          |     |
|-------------------|------|----|------|----|-------|-----|-------|-----|---------|----|------------|-----|
| Diagram           |      |    |      |    |       |     |       |     | Top<br> |    | Bottom<br> |     |
| Resolution (bits) | 12   | 8  | 12   | 8  | 12    | 8   | 12    | 8   | 12      | 8  | 12         | 8   |
| X (counts)        | 0    | 0  | 1024 | 64 | 0     | 0   | -1024 | -64 | 0       | 0  | 0          | 0   |
| Y (counts)        | 1024 | 64 | 0    | 0  | -1024 | -64 | 0     | 0   | 0       | 0  | 0          | 0   |
| Z (counts)        | 0    | 0  | 0    | 0  | 0     | 0   | 0     | 0   | 1024    | 64 | -1024      | -64 |
| X-Polarity        | 0    |    | +    |    | 0     |     | -     |     | 0       |    | 0          |     |
| Y-Polarity        | +    |    | 0    |    | -     |     | 0     |     | 0       |    | 0          |     |
| Z-Polarity        | 0    |    | 0    |    | 0     |     | 0     |     | +       |    | -          |     |



Earth's Surface



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Static X/Y/Z Output Response versus Orientation to Earth's surface (1g): GSEL1=0, GSEL0=1 (± 4g)

| Position          | 1   |    | 2   |    | 3    |     | 4    |     | 5                 |    | 6                 |     |
|-------------------|-----|----|-----|----|------|-----|------|-----|-------------------|----|-------------------|-----|
| Diagram           |     |    |     |    |      |     |      |     | Top<br><br>Bottom |    | Bottom<br><br>Top |     |
| Resolution (bits) | 12  | 8  | 12  | 8  | 12   | 8   | 12   | 8   | 12                | 8  | 12                | 8   |
| X (counts)        | 0   | 0  | 512 | 32 | 0    | 0   | -512 | -32 | 0                 | 0  | 0                 | 0   |
| Y (counts)        | 512 | 32 | 0   | 0  | -512 | -32 | 0    | 0   | 0                 | 0  | 0                 | 0   |
| Z (counts)        | 0   | 0  | 0   | 0  | 0    | 0   | 0    | 0   | 512               | 32 | -512              | -32 |
| X-Polarity        | 0   |    | +   |    | 0    |     | -    |     | 0                 |    | 0                 |     |
| Y-Polarity        | +   |    | 0   |    | -    |     | 0    |     | 0                 |    | 0                 |     |
| Z-Polarity        | 0   |    | 0   |    | 0    |     | 0    |     | +                 |    | -                 |     |

↓ (1g)

Earth's Surface

## Static X/Y/Z Output Response versus Orientation to Earth's surface (1g): GSEL1=1, GSEL0=0 (± 8g)

| Position          | 1   |    | 2   |    | 3    |     | 4    |     | 5                 |    | 6                 |     |
|-------------------|-----|----|-----|----|------|-----|------|-----|-------------------|----|-------------------|-----|
| Diagram           |     |    |     |    |      |     |      |     | Top<br><br>Bottom |    | Bottom<br><br>Top |     |
| Resolution (bits) | 12  | 8  | 12  | 8  | 12   | 8   | 12   | 8   | 12                | 8  | 12                | 8   |
| X (counts)        | 0   | 0  | 256 | 16 | 0    | 0   | -256 | -16 | 0                 | 0  | 0                 | 0   |
| Y (counts)        | 256 | 16 | 0   | 0  | -256 | -16 | 0    | 0   | 0                 | 0  | 0                 | 0   |
| Z (counts)        | 0   | 0  | 0   | 0  | 0    | 0   | 0    | 0   | 256               | 16 | -256              | -16 |
| X-Polarity        | 0   |    | +   |    | 0    |     | -    |     | 0                 |    | 0                 |     |
| Y-Polarity        | +   |    | 0   |    | -    |     | 0    |     | 0                 |    | 0                 |     |
| Z-Polarity        | 0   |    | 0   |    | 0    |     | 0    |     | +                 |    | -                 |     |

↓ (1g)

Earth's Surface

|   |   |  |
|---|---|--|
|  | <b>± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications</b> | <b>PART NUMBER:</b><br><br><b>KXTIA-1006</b><br><b>Rev. 4</b><br><b>Dec-2012</b> |
|---|---|--|

## KXTIA Digital Interface

The Kionix KXTIA digital accelerometer has the ability to communicate on the SPI digital serial interface bus. This flexibility allows for easy system integration by eliminating analog-to-digital converter requirements and by providing direct communication with system micro-controllers.

The serial interface terms and descriptions as indicated in Table 6 below will be observed throughout this document.

| Term        | Description   |
|-------------|---|
| Transmitter | The device that transmits data to the bus.  |
| Receiver    | The device that receives data from the bus.   |
| Master      | The device that initiates a transfer, generates clock signals, and terminates a transfer. |
| Slave       | The device addressed by the Master.   |

**Table 6.** Serial Interface Terminologies



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## 4-Wire SPI Communications

### KXTIA 4-Wire SPI Timing Diagram

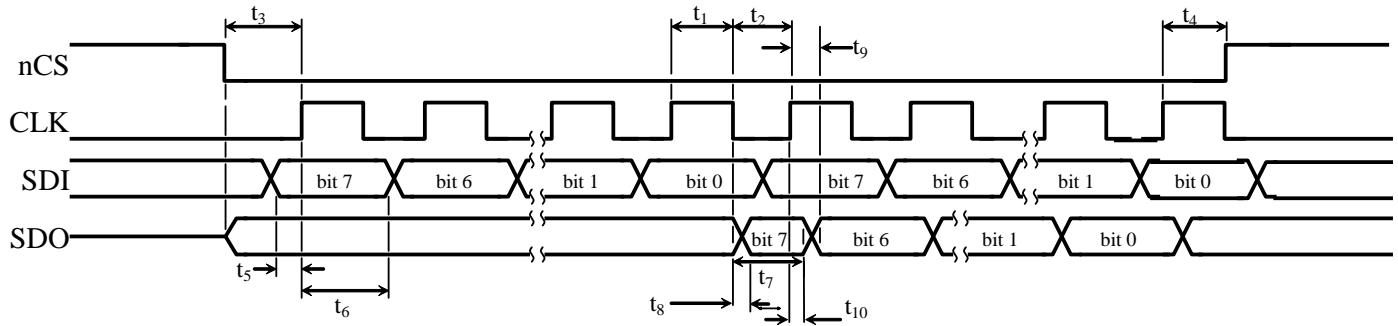


Table 7. 4-Wire SPI Timing

| Number          | Description                             | MIN | MAX            | Units |
|-----------------|---|-----|----------------|-------|
| t <sub>1</sub>  | CLK pulse width: high                   | 24  |                | ns    |
| t <sub>2</sub>  | CLK pulse width: low                    | 26  |                | ns    |
| t <sub>3</sub>  | nCS low to first CLK rising edge        | 13  |                | ns    |
| t <sub>4</sub>  | nCS low after the final CLK rising edge | 20  |                | ns    |
| t <sub>5</sub>  | SDI valid to CLK rising edge            | 13  |                | ns    |
| t <sub>6</sub>  | CLK rising edge to SDI invalid          | 11  |                | ns    |
| t <sub>7</sub>  | CLK falling edge to SDO valid           |     | t <sub>2</sub> | ns    |
| t <sub>8</sub>  | CLK falling edge to SDO valid bit<7>    | 19  | 25             | ns    |
| t <sub>9</sub>  | CLK rising edge to SDO valid bit<6:0>   | 19  | 23             | ns    |
| t <sub>10</sub> | CLK rising edge to SDO invalid          | 15  |                | ns    |

#### Notes

1. t<sub>7</sub> is only present during reads.
2. Timings are for V<sub>dd</sub> of 1.8V to 3.6V with 1KΩ pull-up resistor and maximum 20pF load capacitor on SDO.
3. Falling Edge timing of Bit 7 applies only to first byte in auto-increment read and not subsequent bytes. For Bit 7 Max is t<sub>2</sub>/2.




# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## KXTIA 3-Wire SPI Timing Diagram

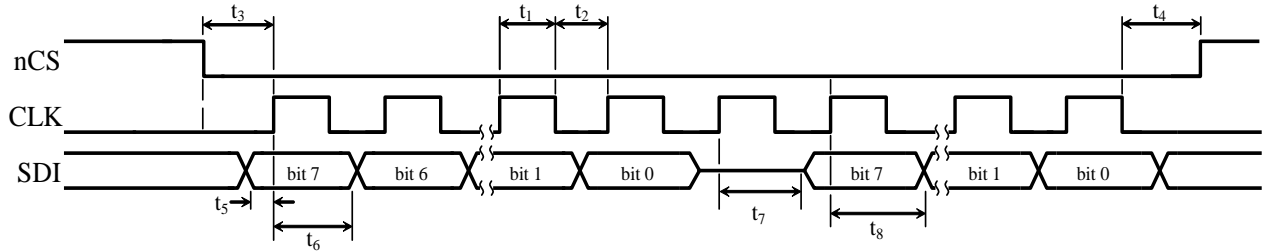

**Table 8. 3-Wire SPI Timing**

| Number | Description   | MIN | MAX | Units |
|--------|---|-----|-----|-------|
| $t_1$  | CLK pulse width: high   | 15  | -   | ns    |
| $t_2$  | CLK pulse width: low  | 15  | -   | ns    |
| $t_3$  | nCS low to first CLK rising edge                              | 8   | -   | ns    |
| $t_4$  | nCS low after the final CLK falling edge                      | 12  | -   | ns    |
| $t_5$  | SDI valid to CLK rising edge                                  | 8   | -   | ns    |
| $t_6$  | CLK rising edge to SDI input invalid                          | 14  | -   | ns    |
| $t_7$  | CLK extra clock cycle rising edge to SDI output becomes valid | 15  | -   | ns    |
| $t_8$  | CLK rising edge to SDI output becomes valid                   | -   | 18  | ns    |

**Notes**

- $t_7$  and  $t_8$  are only present during reads.
- Timings are for Vdd of 1.8V to 3.6V with 1K $\Omega$  pull-up resistor and maximum 20pF load capacitor on SDI.



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## 4-Wire SPI Interface

The KXTIA also utilizes an integrated 4-Wire Serial Peripheral Interface (SPI) for digital communication. The SPI interface is primarily used for synchronous serial communication between one Master device and one or more Slave devices. The Master, typically a micro controller, provides the SPI clock signal (SCLK) and determines the state of Chip Select ( $\overline{\text{CS}}$ ). The KXTIA always operates as a Slave device during standard Master-Slave SPI operation.

4-wire SPI is a synchronous serial interface that uses two control and two data lines. With respect to the Master, the Serial Clock output (SCLK), the Data Output (SDI or MOSI) and the Data Input (SDO or MISO) are shared among the Slave devices. The Master generates an independent Chip Select ( $\overline{\text{CS}}$ ) for each Slave device that goes low at the start of transmission and goes back high at the end. The Slave Data Output (SDO) line, remains in a high-impedance (hi-z) state when the device is not selected, so it does not interfere with any active devices. This allows multiple Slave devices to share a master SPI port as shown in Figure 2 below.

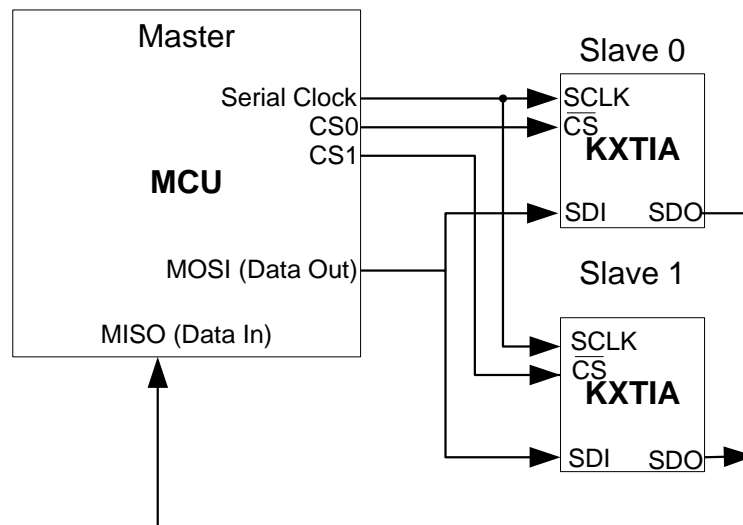


Figure 2 KXTIA 4-wire SPI Connections



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Read and Write Registers

The registers embedded in the KXTIA have 8-bit addresses. Upon power up, the Master must write to the accelerometer's control registers to set its operational mode. On the falling edge of nCS, a 2-byte command is written to the appropriate control register. The first byte initiates the write to the appropriate register, and is followed by the user-defined, data byte. The MSB (Most Significant Bit) of the register address byte will indicate "0" when writing to the register and "1" when reading from the register. This operation occurs over 16 clock cycles. All commands are sent MSB first, and the host must return nCS high for at least one clock cycle before the next data request. Figure 3 below shows the timing diagram for carrying out an 8-bit register write operation.

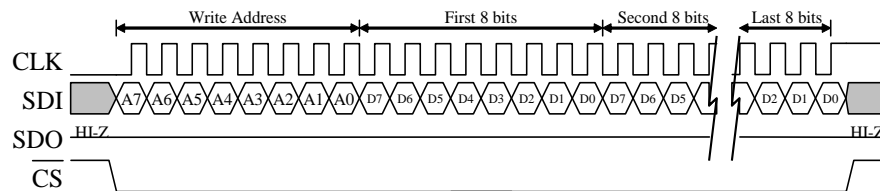


Figure 3 Timing Diagram for 8-Bit Register Write Operation

In order to read an 8-bit register, an 8-bit register address must be written to the accelerometer to initiate the read. The MSB of this register address byte will indicate "0" when writing to the register and "1" when reading from the register. Upon receiving the address, the accelerometer returns the 8-bit data stored in the addressed register. This operation also occurs over 16 clock cycles. All returned data is sent MSB first, and the host must return nCS high for at least one clock cycle before the next data request. Figure 4 shows the timing diagram for an 8-bit register read operation.

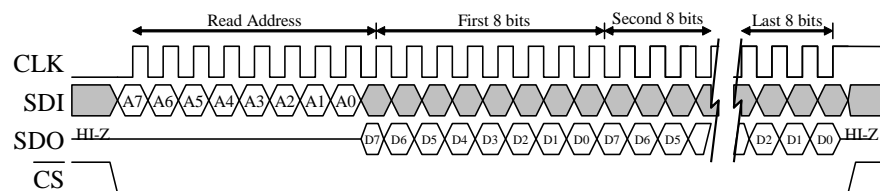


Figure 4 Timing Diagram for 8-Bit Register Read Operation





## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

### 3-Wire SPI Interface

The KXTIA also utilizes an integrated 3-Wire Serial Peripheral Interface (SPI) for digital communication. 3-wire SPI is a synchronous serial interface that uses two control lines and one data line. With respect to the Master, the Serial Clock output (SCLK), the Data Output/Input (SDI) are shared among the Slave devices. The Master generates an independent Chip Select (nCS) for each Slave device that goes low at the start of transmission and goes back high at the end. This allows multiple Slave devices to share a master SPI port as shown in Figure 6 below.

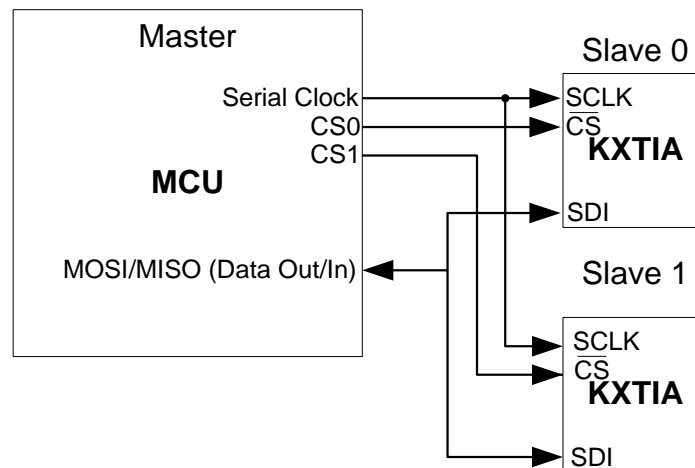


Figure 5 KXTIA 3-wire SPI Connections

### Read and Write Registers

The registers embedded in the KXTIA have 8-bit addresses. Upon power up, the Master must write to the accelerometer's control registers to set its operational mode. On the falling edge of nCS, a 2-byte command is written to the appropriate control register. The first byte initiates the write to the appropriate register, and is followed by the user-defined, data byte. The MSB (Most Significant Bit) of the register address byte will indicate "0" when writing to the register and "1" when reading from the register. A read operation occurs over 17 clock cycles and a write operation occurs over 16 clock cycles. All commands are sent MSB first, and the host must return nCS high for at least one clock cycle before the next address transmission. Figure 6 below shows the timing diagram for carrying out an 8-bit register write operation.



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

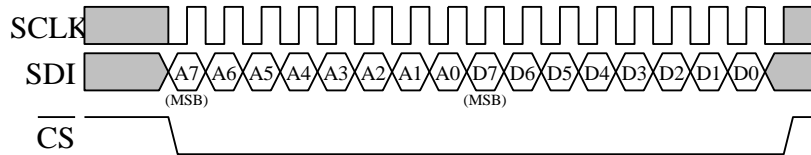


Figure 6 Timing Diagram for 8-Bit Register Write Operation

In order to read an 8-bit register, an 8-bit register address must be written to the accelerometer to initiate the read. The MSB of this register address byte will indicate “0” when writing to the register and “1” when reading from the register. Upon receiving the address, the accelerometer returns the 8-bit data stored in the addressed register. For 3-wire read operations, one extra clock cycle between the address byte and the data output byte is required. Therefore, this operation occurs over 17 clock cycles. All returned data is sent MSB first, and the host must return nCS high for at least one clock cycle before the next data request. Figure 7 shows the timing diagram for an 8-bit register read operation.

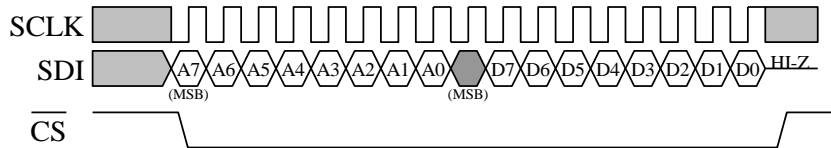


Figure 7 Timing Diagram for 8-Bit Register Read Operation



## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

### KXTIA Embedded Registers

The KXTIA has 44 embedded 8-bit registers that are accessible by the user. This section contains the addresses for all embedded registers and also describes bit functions of each register. Table 9 below provides a listing of the accessible 8-bit registers and their addresses.

| Register Name   | Type<br>Read/Write | SPI Write Address |           | SPI Read Address |           |
|-----------------|--------------------|-------------------|-----------|------------------|-----------|
|                 |                    | Hex               | Binary    | Hex              | Binary    |
| XOUT_HPF_L      | R                  | 0x00              | 0000 0000 | 0x80             | 1000 0000 |
| XOUT_HPF_H      | R                  | 0x01              | 0000 0001 | 0x81             | 1000 0001 |
| YOUT_HPF_L      | R                  | 0x02              | 0000 0010 | 0x82             | 1000 0010 |
| YOUT_HPF_H      | R                  | 0x03              | 0000 0011 | 0x83             | 1000 0011 |
| ZOUT_HPF_L      | R                  | 0x04              | 0000 0100 | 0x84             | 1000 0100 |
| ZOUT_HPF_H      | R                  | 0x05              | 0000 0101 | 0x85             | 1000 0101 |
| XOUT_L          | R                  | 0x06              | 0000 0110 | 0x86             | 1000 0110 |
| XOUT_H          | R                  | 0x07              | 0000 0111 | 0x87             | 1000 0111 |
| YOUT_L          | R                  | 0x08              | 0000 1000 | 0x88             | 1000 1000 |
| YOUT_H          | R                  | 0x09              | 0000 1001 | 0x89             | 1000 1001 |
| ZOUT_L          | R                  | 0x0A              | 0000 1010 | 0x8A             | 1000 1010 |
| ZOUT_H          | R                  | 0x0B              | 0000 1011 | 0x8B             | 1000 1011 |
| DCST_RESP       | R                  | 0x0C              | 0000 1100 | 0x8C             | 1000 1100 |
| Not Used        | -                  | 0x0D              | 0000 1101 | 0x8D             | 1000 1101 |
| Not Used        | -                  | 0x0E              | 0000 1110 | 0x8E             | 1000 1110 |
| WHO_AM_I        | R                  | 0x0F              | 0000 1111 | 0x8F             | 1000 1111 |
| TILT_POS_CUR    | R                  | 0x10              | 0001 0000 | 0x90             | 1001 0000 |
| TILT_POS_PRE    | R                  | 0x11              | 0001 0001 | 0x91             | 1001 0001 |
| Kionix Reserved | -                  | 0x12              | 0001 0010 | 0x92             | 1001 0010 |
| Kionix Reserved | -                  | 0x13              | 0001 0011 | 0x93             | 1001 0011 |
| Kionix Reserved | -                  | 0x14              | 0001 0100 | 0x94             | 1001 0100 |
| INT_SRC_REG1    | R                  | 0x15              | 0001 0101 | 0x95             | 1001 0101 |
| INT_SRC_REG2    | R                  | 0x16              | 0001 0110 | 0x96             | 1001 0110 |
| Not Used        | -                  | 0x17              | 0001 0111 | 0x97             | 1001 0111 |
| STATUS_REG      | R                  | 0x18              | 0001 1000 | 0x98             | 1001 1000 |
| Not Used        | -                  | 0x19              | 0001 1001 | 0x99             | 1001 1001 |
| INT_REL         | R                  | 0x1A              | 0001 1010 | 0x9A             | 1001 1010 |
| CTRL_REG1*      | R/W                | 0x1B              | 0001 1011 | 0x9B             | 1001 1011 |
| CTRL_REG2*      | R/W                | 0x1C              | 0001 1100 | 0x9C             | 1001 1100 |



## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

|                    |     |             |           |             |           |
|--------------------|-----|-------------|-----------|-------------|-----------|
| CTRL_REG3*         | R/W | 0x1D        | 0001 1101 | 0x9D        | 1001 1101 |
| INT_CTRL_REG1*     | R/W | 0x1E        | 0001 1110 | 0x9E        | 1001 1110 |
| INT_CTRL_REG2*     | R/W | 0x1F        | 0001 1111 | 0x9F        | 1001 1111 |
| INT_CTRL_REG3*     | R/W | 0x20        | 0010 0000 | 0xA0        | 1010 0000 |
| DATA_CTRL_REG*     | R/W | 0x21        | 0010 0001 | 0xA1        | 1010 0001 |
| Not Used           | -   | 0x22 – 0x27 | -         | 0xA2 – 0xA7 | -         |
| TILT_TIMER*        | R/W | 0x28        | 0010 1000 | 0xA8        | 1010 1000 |
| WUF_TIMER*         | R/W | 0x29        | 0010 1001 | 0xA9        | 1010 1001 |
| Not Used           | -   | 0x2A        | 0010 1010 | 0xAA        | 1010 1010 |
| TDT_TIMER*         | R/W | 0x2B        | 0010 1011 | 0xAB        | 1010 1011 |
| TDT_H_THRESH*      | R/W | 0x2C        | 0010 1100 | 0xAC        | 1010 1100 |
| TDT_L_THRESH*      | R/W | 0x2D        | 0010 1101 | 0xAD        | 1010 1101 |
| TDT_TAP_TIMER*     | R/W | 0x2E        | 0010 1110 | 0xAE        | 1010 1110 |
| TDT_TOTAL_TIMER*   | R/W | 0x2F        | 0010 1111 | 0xAF        | 1010 1111 |
| TDT_LATENCY_TIMER* | R/W | 0x30        | 0011 0000 | 0xB0        | 1011 0000 |
| TDT_WINDOW_TIMER*  | R/W | 0x31        | 0011 0001 | 0xB1        | 1011 0001 |
| BUF_CTRL1*         | R/W | 0x32        | 0011 0010 | 0xB2        | 1011 0010 |
| BUF_CTRL2*         | R/W | 0x33        | 0011 0011 | 0xB3        | 1011 0011 |
| BUF_STATUS_REG1    | R   | 0x34        | 0011 0100 | 0xB4        | 1011 0100 |
| BUF_STATUS_REG2    | R   | 0x35        | 0011 0101 | 0xB5        | 1011 0101 |
| BUF_CLEAR          | W   | 0x36        | 0011 0110 | 0xB6        | 1011 0110 |
| Reserved           | -   | 0x37 – 0x39 | -         | 0xB7 - 0xB9 | -         |
| SELF_TEST          | R/W | 0x3A        | 0011 1010 | 0xBA        | 1011 1010 |
| Reserved           | -   | 0x3B – 0x59 | -         | 0xBB – 0xD9 | -         |
| WUF_THRESH*        | R/W | 0x5A        | 0101 1010 | 0xDA        | 1101 1010 |
| Reserved           | -   | 0x5B        | 0101 1011 | 0xDB        | 1101 1011 |
| TILT_ANGLE*        | R/W | 0x5C        | 0101 1100 | 0xDC        | 1101 1100 |
| Reserved           | -   | 0x5D – 0x5E | -         | 0xDD – 0xDE | -         |
| HYST_SET*          | R/W | 0x6F        | 0110 1111 | 0xEF        | 1110 1111 |
| BUF_READ           | R   | 0x7F        | 0111 1111 | 0xFF        | 1111 1111 |

\* Note: When changing the contents of these registers, the PC1 bit in CTRL\_REG1 must first be set to "0".

**Table 9.** KXTIA Register Map



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## KXTIA Register Descriptions

### Accelerometer Outputs

These registers contain up to 12-bits of valid acceleration data for each axis depending on the setting of the RES bit in CTRL\_REG1, where the acceleration outputs are represented in 12-bit valid data when RES = '1' and 8-bit valid data when RES = '0'. The data is updated every user-defined ODR period, is protected from overwrite during each read, and can be converted from digital counts to acceleration (g) per Figure 1 below. The register acceleration output binary data is represented in N-bit 2's complement format. For example, if N = 12 bits, then the Counts range is from -2048 to 2047, and if N = 8 bits, then the Counts range is from -128 to 127.

| <b>12-bit<br/>Register Data<br/>(2's complement)</b> | <b>Equivalent<br/>Counts in decimal</b> | <b>Range = +/-2g</b> | <b>Range = +/-4g</b> | <b>Range = +/-8g</b> |
|--|---|----------------------|----------------------|----------------------|
| 0111 1111 1111                                       | 2047                                    | +1.999g              | +3.998g              | +7.996g              |
| 0111 1111 1110                                       | 2046                                    | +1.998g              | +3.996g              | +7.992g              |
| ...  | ...                                     | ...                  | ...                  | ...                  |
| 0000 0000 0001                                       | 1                                       | +0.001g              | +0.002g              | +0.004g              |
| 0000 0000 0000                                       | 0                                       | 0.000g               | 0.000g               | 0.000g               |
| 1111 1111 1111                                       | -1                                      | -0.001g              | -0.002g              | -0.004g              |
| ...  | ...                                     | ...                  | ...                  | ...                  |
| 1000 0000 0001                                       | -2047                                   | -1.999g              | -3.998g              | -7.996g              |
| 1000 0000 0000                                       | -2048                                   | -2.000g              | -4.000g              | -8.000g              |

| <b>8-bit<br/>Register Data<br/>(2's complement)</b> | <b>Equivalent<br/>Counts in decimal</b> | <b>Range = +/-2g</b> | <b>Range = +/-4g</b> | <b>Range = +/-8g</b> |
|---|---|----------------------|----------------------|----------------------|
| 0111 1111   | 127                                     | +1.984g              | +3.968g              | +7.936g              |
| 0111 1110   | 126                                     | +1.968g              | +3.936g              | +7.872g              |
| ...   | ...                                     | ...                  | ...                  | ...                  |
| 0000 0001   | 1                                       | +0.016g              | +0.032g              | +0.064g              |
| 0000 0000   | 0                                       | 0.000g               | 0.000g               | 0.000g               |
| 1111 1111   | -1                                      | -0.016g              | -0.032g              | -0.064g              |
| ...   | ...                                     | ...                  | ...                  | ...                  |
| 1000 0001   | -127                                    | -1.984g              | -3.968g              | -7.936g              |
| 1000 0000   | -128                                    | -2.000g              | -4.000g              | -8.000g              |

**Figure 1. Acceleration (g) Calculation**



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

**Note:** The High Pass Filter outputs are only available if the Wake Up Function is enabled.

## XOUT\_HPF\_L

X-axis high-pass filtered accelerometer output least significant byte

|        |        |        |        |      |                          |      |      |
|--------|--------|--------|--------|------|--------------------------|------|------|
| R      | R      | R      | R      | R    | R                        | R    | R    |
| XOUTD3 | XOUTD2 | XOUTD1 | XOUTD0 | X    | X                        | X    | X    |
| Bit7   | Bit6   | Bit5   | Bit4   | Bit3 | Bit2                     | Bit1 | Bit0 |
|        |        |        |        |      | SPI Write Address: 0x00h |      |      |
|        |        |        |        |      | SPI Read Address: 0x80h  |      |      |

## XOUT\_HPF\_H

X-axis high-pass filtered accelerometer output most significant byte

|         |         |        |        |        |                          |        |        |
|---------|---------|--------|--------|--------|--------------------------|--------|--------|
| R       | R       | R      | R      | R      | R                        | R      | R      |
| XOUTD11 | XOUTD10 | XOUTD9 | XOUTD8 | XOUTD7 | XOUTD6                   | XOUTD5 | XOUTD4 |
| Bit7    | Bit6    | Bit5   | Bit4   | Bit3   | Bit2                     | Bit1   | Bit0   |
|         |         |        |        |        | SPI Write Address: 0x01h |        |        |
|         |         |        |        |        | SPI Read Address: 0x81h  |        |        |

## YOUT\_HPF\_L

Y-axis high-pass filtered accelerometer output least significant byte

|        |        |        |        |      |                          |      |      |
|--------|--------|--------|--------|------|--------------------------|------|------|
| R      | R      | R      | R      | R    | R                        | R    | R    |
| YOUTD3 | YOUTD2 | YOUTD1 | YOUTD0 | X    | X                        | X    | X    |
| Bit7   | Bit6   | Bit5   | Bit4   | Bit3 | Bit2                     | Bit1 | Bit0 |
|        |        |        |        |      | SPI Write Address: 0x02h |      |      |
|        |        |        |        |      | SPI Read Address: 0x82h  |      |      |

## YOUT\_HPF\_H

Y-axis high-pass filtered accelerometer output most significant byte

|         |         |        |        |        |                          |        |        |
|---------|---------|--------|--------|--------|--------------------------|--------|--------|
| R       | R       | R      | R      | R      | R                        | R      | R      |
| YOUTD11 | YOUTD10 | YOUTD9 | YOUTD8 | YOUTD7 | YOUTD6                   | YOUTD5 | YOUTD4 |
| Bit7    | Bit6    | Bit5   | Bit4   | Bit3   | Bit2                     | Bit1   | Bit0   |
|         |         |        |        |        | SPI Write Address: 0x03h |        |        |
|         |         |        |        |        | SPI Read Address: 0x83h  |        |        |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## ZOUT\_HPF\_L

Z-axis high-pass filtered accelerometer output least significant byte

|        |        |        |        |      |                          |      |      |
|--------|--------|--------|--------|------|--------------------------|------|------|
| R      | R      | R      | R      | R    | R                        | R    | R    |
| ZOUTD3 | ZOUTD2 | ZOUTD1 | ZOUTD0 | X    | X                        | X    | X    |
| Bit7   | Bit6   | Bit5   | Bit4   | Bit3 | Bit2                     | Bit1 | Bit0 |
|        |        |        |        |      | SPI Write Address: 0x04h |      |      |
|        |        |        |        |      | SPI Read Address: 0x84h  |      |      |

## ZOUT\_HPF\_H

Z-axis high-pass filtered accelerometer output most significant byte

|         |         |        |        |        |                          |        |        |
|---------|---------|--------|--------|--------|--------------------------|--------|--------|
| R       | R       | R      | R      | R      | R                        | R      | R      |
| ZOUTD11 | ZOUTD10 | ZOUTD9 | ZOUTD8 | ZOUTD7 | ZOUTD6                   | ZOUTD5 | ZOUTD4 |
| Bit7    | Bit6    | Bit5   | Bit4   | Bit3   | Bit2                     | Bit1   | Bit0   |
|         |         |        |        |        | SPI Write Address: 0x05h |        |        |
|         |         |        |        |        | SPI Read Address: 0x85h  |        |        |

## XOUT\_L

X-axis accelerometer output least significant byte

|        |        |        |        |      |                          |      |      |
|--------|--------|--------|--------|------|--------------------------|------|------|
| R      | R      | R      | R      | R    | R                        | R    | R    |
| XOUTD3 | XOUTD2 | XOUTD1 | XOUTD0 | X    | X                        | X    | X    |
| Bit7   | Bit6   | Bit5   | Bit4   | Bit3 | Bit2                     | Bit1 | Bit0 |
|        |        |        |        |      | SPI Write Address: 0x06h |      |      |
|        |        |        |        |      | SPI Read Address: 0x86h  |      |      |

## XOUT\_H

X-axis accelerometer output most significant byte

|         |         |        |        |        |                          |        |        |
|---------|---------|--------|--------|--------|--------------------------|--------|--------|
| R       | R       | R      | R      | R      | R                        | R      | R      |
| XOUTD11 | XOUTD10 | XOUTD9 | XOUTD8 | XOUTD7 | XOUTD6                   | XOUTD5 | XOUTD4 |
| Bit7    | Bit6    | Bit5   | Bit4   | Bit3   | Bit2                     | Bit1   | Bit0   |
|         |         |        |        |        | SPI Write Address: 0x07h |        |        |
|         |         |        |        |        | SPI Read Address: 0x87h  |        |        |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## YOUT\_L

Y-axis accelerometer output least significant byte

|        |        |        |        |      |                          |      |      |
|--------|--------|--------|--------|------|--------------------------|------|------|
| R      | R      | R      | R      | R    | R                        | R    | R    |
| YOUTD3 | YOUTD2 | YOUTD1 | YOUTD0 | X    | X                        | X    | X    |
| Bit7   | Bit6   | Bit5   | Bit4   | Bit3 | Bit2                     | Bit1 | Bit0 |
|        |        |        |        |      | SPI Write Address: 0x08h |      |      |
|        |        |        |        |      | SPI Read Address: 0x88h  |      |      |

## YOUT\_H

Y-axis accelerometer output most significant byte

|         |         |        |        |        |                          |        |        |
|---------|---------|--------|--------|--------|--------------------------|--------|--------|
| R       | R       | R      | R      | R      | R                        | R      | R      |
| YOUTD11 | YOUTD10 | YOUTD9 | YOUTD8 | YOUTD7 | YOUTD6                   | YOUTD5 | YOUTD4 |
| Bit7    | Bit6    | Bit5   | Bit4   | Bit3   | Bit2                     | Bit1   | Bit0   |
|         |         |        |        |        | SPI Write Address: 0x09h |        |        |
|         |         |        |        |        | SPI Read Address: 0x89h  |        |        |

## ZOUT\_L

Z-axis accelerometer output least significant byte

|        |        |        |        |      |                          |      |      |
|--------|--------|--------|--------|------|--------------------------|------|------|
| R      | R      | R      | R      | R    | R                        | R    | R    |
| ZOUTD3 | ZOUTD2 | ZOUTD1 | ZOUTD0 | X    | X                        | X    | X    |
| Bit7   | Bit6   | Bit5   | Bit4   | Bit3 | Bit2                     | Bit1 | Bit0 |
|        |        |        |        |      | SPI Write Address: 0x0Ah |      |      |
|        |        |        |        |      | SPI Read Address: 0x8Ah  |      |      |

## ZOUT\_H

Z-axis accelerometer output most significant byte

|         |         |        |        |        |                          |        |        |
|---------|---------|--------|--------|--------|--------------------------|--------|--------|
| R       | R       | R      | R      | R      | R                        | R      | R      |
| ZOUTD11 | ZOUTD10 | ZOUTD9 | ZOUTD8 | ZOUTD7 | ZOUTD6                   | ZOUTD5 | ZOUTD4 |
| Bit7    | Bit6    | Bit5   | Bit4   | Bit3   | Bit2                     | Bit1   | Bit0   |
|         |         |        |        |        | SPI Write Address: 0x0Bh |        |        |
|         |         |        |        |        | SPI Read Address: 0x8Bh  |        |        |





## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

### DCST\_RESP

This register can be used to verify proper integrated circuit functionality. It always has a byte value of 0x55h unless the DCST bit in CTRL\_REG3 is set. At that point this value is set to 0xAAh. The byte value is returned to 0x55h after reading this register.

|        |        |        |        |        |        |                          |        |             |
|--------|--------|--------|--------|--------|--------|--------------------------|--------|-------------|
| R      | R      | R      | R      | R      | R      | R                        | R      |             |
| DCSTR7 | DCSTR6 | DCSTR5 | DCSTR4 | DCSTR3 | DCSTR2 | DCSTR1                   | DCSTR0 | Reset Value |
| Bit7   | Bit6   | Bit5   | Bit4   | Bit3   | Bit2   | Bit1                     | Bit0   | 01010101    |
|        |        |        |        |        |        | SPI Write Address: 0x0Ch |        |             |
|        |        |        |        |        |        | SPI Read Address: 0x8Ch  |        |             |

### WHO\_AM\_I

This register can be used for supplier recognition, as it can be factory written to a known byte value. The default value is 0x06h.

|      |      |      |      |      |      |                          |      |             |
|------|------|------|------|------|------|--------------------------|------|-------------|
| R    | R    | R    | R    | R    | R    | R                        | R    |             |
| WIA7 | WIA6 | WIA5 | WIA4 | WIA3 | WIA2 | WIA1                     | WIA0 | Reset Value |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1                     | Bit0 | 00000110    |
|      |      |      |      |      |      | SPI Write Address: 0x0Fh |      |             |
|      |      |      |      |      |      | SPI Read Address: 0x8Fh  |      |             |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## Tilt Position Registers

These two registers report previous and current tilt position data that is updated at the user-defined ODR frequency and is protected during register read. Table 10 describes the reported position for each bit value.

### TILT\_POS\_CUR

Current tilt position register

|      |      |      |      |      |      |      |      |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| R    | R    | R    | R    | R    | R    | R    | R    |                          |
| 0    | 0    | LE   | RI   | DO   | UP   | FD   | FU   | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00100000                 |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x10h |
|      |      |      |      |      |      |      |      | SPI Read Address: 0x90h  |

### TILT\_POS\_PRE

Previous tilt position register

|      |      |      |      |      |      |      |      |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| R    | R    | R    | R    | R    | R    | R    | R    |                          |
| 0    | 0    | LE   | RI   | DO   | UP   | FD   | FU   | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00100000                 |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x11h |
|      |      |      |      |      |      |      |      | SPI Read Address: 0x91h  |

| Bit | Description          |
|-----|----------------------|
| LE  | Left State (X-)      |
| RI  | Right State (X+)     |
| DO  | Down State (Y-)      |
| UP  | Up State (Y+)        |
| FD  | Face-Down State (Z-) |
| FU  | Face-Up State (Z+)   |

**Table 10.** KXTIA Tilt Position



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## Interrupt Source Registers

These two registers report function state changes. This data is updated when a new state change or event occurs and each application's result is latched until the interrupt release register is read. The motion interrupt bit WUFS can be configured to report data in an unlatched manner via the interrupt control registers.

### INT\_SRC\_REG1

This register reports which axis and direction detected a single or double tap event, per Table 11.

|      |      |      |      |      |                          |      |      |
|------|------|------|------|------|--------------------------|------|------|
| R    | R    | R    | R    | R    | R                        | R    | R    |
| 0    | 0    | TLE  | TRI  | TDO  | TUP                      | TFD  | TFU  |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2                     | Bit1 | Bit0 |
|      |      |      |      |      | SPI Write Address: 0x15h |      |      |
|      |      |      |      |      | SPI Read Address: 0x95h  |      |      |

| Bit | Description              |
|-----|--------------------------|
| TLE | X Negative (X-) Reported |
| TRI | X Positive (X+) Reported |
| TDO | Y Negative (Y-) Reported |
| TUP | Y Positive (Y+) Reported |
| TFD | Z Negative (Z-) Reported |
| TFU | Z Positive (Z+) Reported |

**Table 11.** KXTIA Directional Tap™ Reporting



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## INT\_SRC\_REG2

This register reports which function caused an interrupt. Reading from the interrupt release register will clear the entire contents of this register.

|      |      |      |      |       |                          |      |      |
|------|------|------|------|-------|--------------------------|------|------|
| R    | R    | R    | R    | R     | R                        | R    | R    |
| 0    | 0    | WMI  | DRDY | TDTS1 | TDTS0                    | WUFS | TPS  |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3  | Bit2                     | Bit1 | Bit0 |
|      |      |      |      |       | SPI Write Address: 0x16h |      |      |
|      |      |      |      |       | SPI Read Address: 0x96h  |      |      |

**DRDY** indicates that new acceleration data is available. This bit is cleared when acceleration data is read or the interrupt release register is read.  
*DRDY = 0 – new acceleration data not available*  
*DRDY = 1 – new acceleration data available*

**TDTS1, TDTS0** indicates whether a single or double-tap event was detected per Table 12.

| TDTS1 | TDTS0 | Event      |
|-------|-------|------------|
| 0     | 0     | No Tap     |
| 0     | 1     | Single Tap |
| 1     | 0     | Double Tap |
| 1     | 1     | DNE        |

**Table 12.** Directional Tap™ Event Description

**WUFS** - Wake up, This bit is cleared when acceleration data is read or the interrupt release register is read.  
*0 = No motion*  
*1 = Motion has activated the interrupt*

**TPS** reflects the status of the tilt position function.  
*TPS = 0 – tilt position state has not changed*  
*TPS = 1 – tilt position state has changed*

**WMI** indicates that the buffer's sample threshold has been reached when in FIFO, FILO, or Stream mode. Not used in Trigger mode.  
*WMI = 0 – sample threshold has not been reached*  
*WMI = 1 – sample threshold has been reached*



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## STATUS\_REG

This register reports the status of the interrupt.

|      |      |      |      |      |                          |      |      |
|------|------|------|------|------|--------------------------|------|------|
| R    | R    | R    | R    | R    | R                        | R    | R    |
| 0    | 0    | 0    | INT  | 0    | 0                        | 0    | 0    |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2                     | Bit1 | Bit0 |
|      |      |      |      |      | SPI Write Address: 0x18h |      |      |
|      |      |      |      |      | SPI Read Address: 0x98h  |      |      |

***INT** reports the combined interrupt information of all enabled functions. This bit is released to 0 when the interrupt source latch register (1Ah) is read.*

*INT = 0 – no interrupt event*

*INT = 1 – interrupt event has occurred*

## INT\_REL

Latched interrupt source information (INT\_SRC\_REG1 and INT\_SRC\_REG2), the status register, and the physical interrupt pin (7) are cleared when reading this register.

|      |      |      |      |      |                          |      |      |
|------|------|------|------|------|--------------------------|------|------|
| R    | R    | R    | R    | R    | R                        | R    | R    |
| X    | X    | X    | X    | X    | X                        | X    | X    |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2                     | Bit1 | Bit0 |
|      |      |      |      |      | SPI Write Address: 0x1Ah |      |      |
|      |      |      |      |      | SPI Read Address: 0x9Ah  |      |      |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## CTRL\_REG1

Read/write control register that controls the main feature set.

|      |      |       |       |       |      |                          |      |             |
|------|------|-------|-------|-------|------|--------------------------|------|-------------|
| R/W  | R/W  | R/W   | R/W   | R/W   | R/W  | R/W                      | R/W  | R/W         |
| PC1  | RES  | DRDYE | GSEL1 | GSEL0 | TDTE | WUFE                     | TPE  | Reset Value |
| Bit7 | Bit6 | Bit5  | Bit4  | Bit3  | Bit2 | Bit1                     | Bit0 | 00000000    |
|      |      |       |       |       |      | SPI Write Address: 0x1Bh |      |             |
|      |      |       |       |       |      | SPI Read Address: 0x9Bh  |      |             |

**PC1** controls the operating mode of the KXTIA.

*PC1 = 0 - stand-by mode  
PC1 = 1 – operating mode*

**RES** determines the performance mode of the KXTIA. Note that to change the value of this bit, the PC1 bit must first be set to “0”.

*RES = 0 – low current, 8-bit valid  
RES = 1- high current, 12-bit valid*

**DRDYE** enables the reporting of the availability of new acceleration data as an interrupt. Note that to change the value of this bit, the PC1 bit must first be set to “0”.

*DRDYE = 0 - new acceleration data not available  
DRDYE = 1- new acceleration data available*

**GSEL1, GSEL0** selects the acceleration range of the accelerometer outputs per Table 13. Note that to change the value of this bit, the PC1 bit must first be set to “0”.

| GSEL1 | GSEL0 | Range |
|-------|-------|-------|
| 0     | 0     | +/-2g |
| 0     | 1     | +/-4g |
| 1     | 0     | +/-8g |
| 1     | 1     | NA    |

**Table 13.** Selected Acceleration Range



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

**TDTE** enables the Directional Tap™ function that will detect single and double tap events. Note that to change the value of this bit, the PC1 bit must first be set to “0”.

TDTE = 0 – disable  
TDTE = 1- enable

**WUFE** enables the Wake Up (motion detect) function that will detect a general motion event. Note that to change the value of this bit, the PC1 bit must first be set to “0”.

WUFE = 0 – disable  
WUFE = 1- enable

**TPE** enables the Tilt Position function that will detect changes in device orientation. Note that to change the value of this bit, the PC1 bit must first be set to “0”.

TPE = 0 – disable  
TPE = 1- enable

## CTRL\_REG2

Read/write control register that primarily controls tilt position state enabling. Per Table 14, if a state’s bit is set to one (1), a transition into the corresponding orientation state will generate an interrupt. If it is set to zero (0), a transition into the corresponding orientation state will not generate an interrupt. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

| R/W   | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |                          |
|-------|------|------|------|------|------|------|------|--------------------------|
| OTDTH | 0    | LEM  | RIM  | DOM  | UPM  | FDM  | FUM  | Reset Value              |
| Bit7  | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00111111                 |
|       |      |      |      |      |      |      |      | SPI Write Address: 0x1Ch |
|       |      |      |      |      |      |      |      | SPI Read Address: 0x9Ch  |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

***OTDTH** determines the range of the Directional Tap™ Output Data Rate (ODR). See Table 16 for additional clarification.*

*OTDTH = 0 – slower range of Directional Tap™ ODR's are available.*

*SRST = 1 – faster range of Directional Tap™ ODR's are available.*

| Bit | Description     |
|-----|-----------------|
| LEM | Left State      |
| RIM | Right State     |
| DOM | Down State      |
| UPM | Up State        |
| FDM | Face-Down State |
| FUM | Face-Up State   |

**Table 14.** Tilt Position State Enabling

## CTRL\_REG3

Read/write control register that provides more feature set control. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

| R/W  | R/W  | R/W  | R/W  | R/W   | R/W   | R/W                      | R/W   |             |
|------|------|------|------|-------|-------|--------------------------|-------|-------------|
| SRST | OTPA | OTPB | DCST | OTDTA | OTDTB | OWUFA                    | OWUFB | Reset Value |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3  | Bit2  | Bit1                     | Bit0  | 01001101    |
|      |      |      |      |       |       | SPI Write Address: 0x1Dh |       |             |
|      |      |      |      |       |       | SPI Read Address: 0x9Dh  |       |             |

***SRST** initiates software reset, which performs the RAM reboot routine. This bit will remain 1 until the RAM reboot routine is finished.*

*SRST = 0 – no action*

*SRST = 1 – start RAM reboot routine*

***OTPA, OTPB** sets the output data rate for the Tilt Position function per Table 15. The default Tilt Position ODR is 12.5Hz.*





# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

| OTPA | OTPB | Output Data Rate |
|------|------|------------------|
| 0    | 0    | 1.6Hz            |
| 0    | 1    | 6.3Hz            |
| 1    | 0    | 12.5Hz           |
| 1    | 1    | 50Hz             |

**Table 15.** Tilt Position Function Output Data Rate

*DCST* initiates the digital communication self-test function.

*DCST* = 0 – no action

*DCST* = 1 – sets *ST\_RESP* register to 0xAAh and when *ST\_RESP* is read, sets this bit to 0 and sets *ST\_RESP* to 0x55h

*OTDTA*, *OTDTB* sets the output data rate for the Directional Tap™ function per Table 16. The default Directional Tap™ ODR is 400Hz.

| OTDTH | OTDTA | OTDTB | Output Data Rate |
|-------|-------|-------|------------------|
| 0     | 0     | 0     | 50Hz             |
| 0     | 0     | 1     | 100Hz            |
| 0     | 1     | 0     | 200Hz            |
| 0     | 1     | 1     | 400Hz            |
| 1     | 0     | 0     | 12.5Hz           |
| 1     | 0     | 1     | 25Hz             |
| 1     | 1     | 0     | 800Hz            |
| 1     | 1     | 1     | 1600Hz           |

**Table 16.** Directional Tap™ Function Output Data Rate



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

**OWUFA, OWUFB** sets the output data rate for the general motion detection function and the high-pass filtered outputs per Table 17. The default Motion Wake Up ODR is 50Hz.

| OWUFA | OWUFB | Output Data Rate |
|-------|-------|------------------|
| 0     | 0     | 25Hz             |
| 0     | 1     | 50Hz             |
| 1     | 0     | 100Hz            |
| 1     | 1     | 200Hz            |

**Table 17.** Motion Wake Up Function Output Data Rate

## INT\_CTRL\_REG1

This register controls the settings for the physical interrupt pin (7). Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W   |                          |
|------|------|------|------|------|------|------|-------|--------------------------|
| 0    | 0    | IEN  | IEA  | IEL  | IEU  | 0    | SPI3E | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0  | 00010000                 |
|      |      |      |      |      |      |      |       | SPI Write Address: 0x1Eh |
|      |      |      |      |      |      |      |       | SPI Read Address: 0x9Eh  |

**IEN** enables/disables the physical interrupt pin (7)

*IEN = 0 – physical interrupt pin (7) is disabled*

*IEN = 1 – physical interrupt pin (7) is enabled*

**IEA** sets the polarity of the physical interrupt pin (7)

*IEA = 0 – polarity of the physical interrupt pin (7) is active low*

*IEA = 1 – polarity of the physical interrupt pin (7) is active high*

**IEL** sets the response of the physical interrupt pin (7)

*IEL = 0 – the physical interrupt pin (7) latches until it is cleared by reading INT\_REL*

*IEL = 1 – the physical interrupt pin (7) will transmit one pulse with a period of approximately 0.03 - 0.05ms*

**IEU** sets an alternate unlatched response for the physical interrupt pin (7) when the motion interrupt feature (WUF) only is enabled.

*IEU = 0 – the physical interrupt pin (7) latches or pulses per the IEL bit until it is cleared by reading INT\_REL*

*IEU = 1 – the physical interrupt pin (7) will follow an unlatched response if the motion interrupt feature is enabled*



**± 2g / 4g / 8g Tri-axis Digital  
Accelerometer Specifications**

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

**SPI3E** sets SPI protocol to 3-wire or 4-wire SPI.  
*SPI3E = 0 – 4-wire SPI enabled*  
*SPI3E = 1 – 3-wire SPI enabled*

## INT\_CTRL\_REG2

This register controls motion detection axis enabling. Per Table 18, if an axis' bit is set to one (1), a motion on that axis will generate an interrupt. If it is set to zero (0), a motion on that axis will not generate an interrupt. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to "0".

|      |      |      |      |      |                          |      |      |             |
|------|------|------|------|------|--------------------------|------|------|-------------|
| R/W  | R/W  | R/W  | R/W  | R/W  | R/W                      | R/W  | R/W  |             |
| XBW  | YBW  | ZBW  | 0    | 0    | 0                        | 0    | 0    | Reset Value |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2                     | Bit1 | Bit0 | 11100000    |
|      |      |      |      |      | SPI Write Address: 0x1Fh |      |      |             |
|      |      |      |      |      | SPI Read Address: 0x9Fh  |      |      |             |

| Bit | Description   |
|-----|---------------|
| XBW | X-Axis Motion |
| YBW | Y-Axis Motion |
| ZBW | Z-Axis Motion |

**Table 18.** Motion Detection Axis Enabling



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## INT\_CTRL\_REG3

This register controls the tap detection direction axis enabling. Per Table 14, if a direction's bit is set to one (1), a single or double tap in that direction will generate an interrupt. If it is set to zero (0), a single or double tap in that direction will not generate an interrupt. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to "0".

| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| 0    | TMEN | TLEM | TRIM | TDOM | TUPM | TFDM | TFUM | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00111111                 |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x20h |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xA0h  |

| Bit  | Description     |
|------|-----------------|
| TLEM | X Negative (X-) |
| TRIM | X Positive (X+) |
| TDOM | Y Negative (Y-) |
| TUPM | Y Positive (Y+) |
| TFDM | Z Negative (Z-) |
| TFUM | Z Positive (Z+) |

**Table 19.** Directional Tap™ Axis Mask

**TMEN** enables/disables alternate tap masking scheme  
*TMEN = 0 – alternate tap masking scheme disabled*  
*TMEN = 1 – alternate tap masking scheme enabled*



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## DATA\_CTRL\_REG

Read/write control register that configures the acceleration outputs. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to "0".

| R/W  | R/W  | R/W    | R/W   | R/W  | R/W  | R/W  | R/W  |                          |
|------|------|--------|-------|------|------|------|------|--------------------------|
| 0    | 0    | HPFROA | HPROB | 0    | OSAA | OSAB | OSAC | Reset Value              |
| Bit7 | Bit6 | Bit5   | Bit4  | Bit3 | Bit2 | Bit1 | Bit0 | 00000010                 |
|      |      |        |       |      |      |      |      | SPI Write Address: 0x21h |
|      |      |        |       |      |      |      |      | SPI Read Address: 0xA1h  |

**HPFROA, HPROB** sets the roll-off frequency for the first-order high-pass filter in conjunction with the output data rate (OWUFA, OWUFB) that is chosen for the HPF acceleration outputs that are used in the Motion Wake Up (WUF) application per Table 20. Note that this roll-off frequency is also applied to the X, Y and Z high-pass filtered outputs.

| High-Pass Filter Configuration |       |       |                   |
|--------------------------------|-------|-------|-------------------|
| HPFROA                         | HPROB | Beta  | HPF Roll-Off (Hz) |
| 0                              | 0     | 7/8   | ODR / 50          |
| 0                              | 1     | 15/16 | ODR / 100         |
| 1                              | 0     | 31/32 | ODR / 200         |
| 1                              | 1     | 63/64 | ODR / 400         |

Table 20. High-Pass Filter Roll-Off Frequency

**OSAA, OSAB, OSAC** sets the output data rate (ODR) for the low-pass filtered acceleration outputs per Table 21.

| OSAA | OSAB | OSAC | Output Data Rate | LPF Roll-Off   |
|------|------|------|------------------|----------------|
| 0    | 0    | 0    | 12.5Hz           | 6.25Hz         |
| 0    | 0    | 1    | 25Hz             | 12.5Hz         |
| 0    | 1    | 0    | 50Hz             | 25Hz           |
| 0    | 1    | 1    | 100Hz            | 50Hz           |
| 1    | 0    | 0    | 200Hz            | 100Hz          |
| 1    | 0    | 1    | 400Hz            | 200Hz          |
| 1    | 1    | 0    | 800Hz            | 400Hz          |
| 1    | 1    | 1    | Does Not Exist   | Does Not Exist |

Table 21. LPF Acceleration Output Data Rate (ODR)



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## TILT\_TIMER

This register is the initial count register for the tilt position state timer (0 to 255 counts). Every count is calculated as 1/ODR delay period, where the Tilt Position ODR is user-defined per Table 15. A new state must be valid as many measurement periods before the change is accepted. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

|      |      |      |      |      |      |      |      |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |                          |
| TSC7 | TSC6 | TSC5 | TSC4 | TSC3 | TSC2 | TSC1 | TSC0 | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00000000                 |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x28h |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xA8h  |

## WUF\_TIMER

This register is the initial count register for the motion detection timer (0 to 255 counts). Every count is calculated as 1/ODR delay period, where the Motion Wake Up ODR is user-defined per Table 17. A new state must be valid as many measurement periods before the change is accepted. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

|       |       |       |       |       |       |       |       |                          |
|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------|
| R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |                          |
| WUFC7 | WUFC6 | WUFC5 | WUFC4 | WUFC3 | WUFC2 | WUFC1 | WUFC0 | Reset Value              |
| Bit7  | Bit6  | Bit5  | Bit4  | Bit3  | Bit2  | Bit1  | Bit0  | 00000000                 |
|       |       |       |       |       |       |       |       | SPI Write Address: 0x29h |
|       |       |       |       |       |       |       |       | SPI Read Address: 0xA9h  |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## TDT\_TIMER

This register contains counter information for the detection of a double tap event. When the Directional Tap™ ODR is 400Hz or less, every count is calculated as 1/ODR delay period. When the Directional Tap™ ODR is 800Hz, every count is calculated as 2/ODR delay period. When the Directional Tap™ ODR is 1600Hz, every count is calculated as 4/ODR delay period. The Directional Tap™ ODR is user-defined per Table 16. TDT\_TIMER represents the minimum time separation between the first tap and the second tap in a double tap event. The Kionix recommended default value is 0.3 seconds (0x78h). Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

| R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | Reset Value              |
|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------|
| TDTC7 | TDTC6 | TDTC5 | TDTC4 | TDTC3 | TDTC2 | TDTC1 | TDTC0 | 01111000                 |
| Bit7  | Bit6  | Bit5  | Bit4  | Bit3  | Bit2  | Bit1  | Bit0  |                          |
|       |       |       |       |       |       |       |       | SPI Write Address: 0x2Bh |
|       |       |       |       |       |       |       |       | SPI Read Address: 0xABh  |

## TDT\_H\_THRESH

This register represents the 8-bit jerk high threshold to determine if a tap is detected. Though this is an 8-bit register, the KXTIA internally multiplies the register value by two in order to set the high threshold. This multiplication results in a range of 0d to 510d with a resolution of two counts. The Performance Index (PI) is the jerk signal that is expected to be less than this threshold, but greater than the TDT\_L\_THRESH threshold during single and double tap events. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”. The Kionix recommended default value is 203 (0xCBh) and the Performance Index is calculated as:

$$\begin{aligned}
 X' &= X(\text{current}) - X(\text{previous}) \\
 Y' &= Y(\text{current}) - Y(\text{previous}) \\
 Z' &= Z(\text{current}) - Z(\text{previous})
 \end{aligned}$$

$$PI = |X'| + |Y'| + |Z'|$$

**Equation 1. Performance Index**

| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | Reset Value              |
|------|------|------|------|------|------|------|------|--------------------------|
| TTH7 | TTH6 | TTH5 | TTH4 | TTH3 | TTH2 | TTH1 | TTH0 | 11001011                 |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |                          |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x2Ch |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xACh  |





# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## TDT\_L\_THRESH

This register represents the 8-bit (0d– 255d) jerk low threshold to determine if a tap is detected. The Performance Index (PI) is the jerk signal that is expected to be greater than this threshold and less than the TDT\_H\_THRESH threshold during single and double tap events. This register also contains the LSB of the TDT\_H\_THRESH threshold. The Kionix recommended default value is 26 (0x1Ah). Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | Reset Value              |
|------|------|------|------|------|------|------|------|--------------------------|
| TTH7 | TTL6 | TTL5 | TTL4 | TTL3 | TTL2 | TTL1 | TTL0 | 00011010                 |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |                          |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x2Dh |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xADh  |

## TDT\_TAP\_TIMER

This register contains counter information for the detection of any tap event. When the Directional Tap™ ODR is 400Hz or less, every count is calculated as 1/ODR delay period. When the Directional Tap™ ODR is 800Hz, every count is calculated as 2/ODR delay period. When the Directional Tap™ ODR is 1600Hz, every count is calculated as 4/ODR delay period. The Directional Tap™ ODR is user-defined per Table 16. In order to ensure that only tap events are detected, these time limits are used. A tap event must be above the performance index threshold (TDT\_THRESH) for at least the low limit (FTDL0 – FTDL2) and no more than the high limit (FTDH0 – FTDH4). The Kionix recommended default value for the high limit is 0.05 seconds and for the low limit is 0.005 seconds (0xA2h). Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

| R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | Reset Value              |
|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------|
| FTDH4 | FTDH3 | FTDH2 | FTDH1 | FTDH0 | FTDL2 | FTDL1 | FTDL0 | 10100010                 |
| Bit7  | Bit6  | Bit5  | Bit4  | Bit3  | Bit2  | Bit1  | Bit0  |                          |
|       |       |       |       |       |       |       |       | SPI Write Address: 0x2Eh |
|       |       |       |       |       |       |       |       | SPI Read Address: 0xAEh  |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## TDT\_TOTAL\_TIMER

This register contains counter information for the detection of a double tap event. When the Directional Tap™ ODR is 400Hz or less, every count is calculated as 1/ODR delay period. When the Directional Tap™ ODR is 800Hz, every count is calculated as 2/ODR delay period. When the Directional Tap™ ODR is 1600Hz, every count is calculated as 4/ODR delay period. The Directional Tap™ ODR is user-defined per Table 16. In order to ensure that only tap events are detected, this time limit is used. This register sets the total amount of time that the two taps in a double tap event can be above the PI threshold (TDT\_L\_THRESH). The Kionix recommended default value for TDT\_TOTAL\_TIMER is 0.09 seconds (0x24h). Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

|      |      |      |      |      |      |      |      |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |                          |
| STD7 | STD6 | STD5 | STD4 | STD3 | STD2 | STD1 | STD0 | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00100100                 |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x2Fh |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xAFh  |

## TDT\_LATENCY\_TIMER

This register contains counter information for the detection of a tap event. When the Directional Tap™ ODR is 400Hz or less, every count is calculated as 1/ODR delay period. When the Directional Tap™ ODR is 800Hz, every count is calculated as 2/ODR delay period. When the Directional Tap™ ODR is 1600Hz, every count is calculated as 4/ODR delay period. The Directional Tap™ ODR is user-defined per Table 16. In order to ensure that only tap events are detected, this time limit is used. This register sets the total amount of time that the tap algorithm will count samples that are above the PI threshold (TDT\_L\_THRESH) during a potential tap event. It is used during both single and double tap events. However, reporting of single taps on the physical interrupt pin (7) will occur at the end of the TDT\_WINDOW\_TIMER. The Kionix recommended default value for TDT\_LATENCY\_TIMER is 0.1 seconds (0x28h). Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

|      |      |      |      |      |      |      |      |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |                          |
| TLT7 | TLT6 | TLT5 | TLT4 | TLT3 | TLT2 | TLT1 | TLT0 | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00101000                 |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x30h |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xB0h  |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## TDT\_WINDOW\_TIMER

This register contains counter information for the detection of single and double taps. When the Directional Tap™ ODR is 400Hz or less, every count is calculated as 1/ODR delay period. When the Directional Tap™ ODR is 800Hz, every count is calculated as 2/ODR delay period. When the Directional Tap™ ODR is 1600Hz, every count is calculated as 4/ODR delay period. The Directional Tap™ ODR is user-defined per Table 16. It defines the time window for the entire tap event, single or double, to occur. Reporting of single taps on the physical interrupt pin (7) will occur at the end of this tap window. The Kionix recommended default value for TDT\_WINDOW\_TIMER is 0.4 seconds (0xA0h). Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to “0”.

|      |      |      |      |      |      |      |      |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | Reset Value              |
| TWS7 | TWS6 | TWS5 | TWS4 | TWS3 | TWS2 | TWS1 | TWS0 | 10100000                 |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |                          |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x31h |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xB1h  |

## BUF\_CTRL1

Read/write control register that controls the buffer sample threshold.

|      |         |         |         |         |         |         |         |                          |
|------|---------|---------|---------|---------|---------|---------|---------|--------------------------|
| R/W  | R/W     | R/W     | R/W     | R/W     | R/W     | R/W     | R/W     | Reset Value              |
| -    | SMP_TH6 | SMP_TH5 | SMP_TH4 | SMP_TH3 | SMP_TH2 | SMP_TH1 | SMP_TH0 | 00000000                 |
| Bit7 | Bit6    | Bit5    | Bit4    | Bit3    | Bit2    | Bit1    | Bit0    |                          |
|      |         |         |         |         |         |         |         | SPI Write Address: 0x32h |
|      |         |         |         |         |         |         |         | SPI Read Address: 0xB2h  |

**SMP\_TH[6:0] Sample Threshold;** determines the number of samples that will trigger a watermark interrupt or will be saved prior to a trigger event. When BUF\_RES=1, the maximum number of samples is 41; when BUF\_RES=0, the maximum number of samples is 84.

| Buffer Model | Sample Function  |
|--------------|--|
| Bypass       | None   |
| FIFO         | Specifies how many buffer sample are needed to trigger a watermark interrupt.          |
| Stream       | Specifies how many buffer samples are needed to trigger a watermark interrupt.         |
| Trigger      | Specifies how many buffer samples before the trigger event are retained in the buffer. |
| FILO         | Specifies how many buffer samples are needed to trigger a watermark interrupt.         |

**Table 22.** Sample Threshold Operation by Buffer Mode



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## BUF\_CTRL2

Read/write control register that controls sample buffer operation.

|      |         |      |      |      |      |        |                          |             |
|------|---------|------|------|------|------|--------|--------------------------|-------------|
| R/W  | R/W     | R/W  | R/W  | R/W  | R/W  | R/W    | R/W                      |             |
| BUFE | BUF_RES | 0    | 0    | 0    | 0    | BUF_M1 | BUF_M0                   | Reset Value |
| Bit7 | Bit6    | Bit5 | Bit4 | Bit3 | Bit2 | Bit1   | Bit0                     | 00000000    |
|      |         |      |      |      |      |        | SPI Write Address: 0x33h |             |
|      |         |      |      |      |      |        | SPI Read Address: 0xB3h  |             |

**BUFE** controls activation of the sample buffer.

*BUFE = 0 – sample buffer inactive*

*BUFE = 1 – sample buffer active*

**BUF\_RES** determines the resolution of the acceleration data samples collected by the sample buffer.

*BUF\_RES = 0 – 8-bit samples are accumulated in the buffer*

*BUF\_RES = 1 – 12-bit samples are accumulated in the buffer*

**BUF\_M1, BUF\_M0** selects the operating mode of the sample buffer per Table 23.

| BUF_M1 | BUF_M0 | Mode    | Description  |
|--------|--------|---------|--|
| 0      | 0      | FIFO    | The buffer collects 84 sets of 8-bit low resolution values or 41 sets of 12bit high resolution values and then stops collecting data, collecting new data only when the buffer is not full.  |
| 0      | 1      | Stream  | The buffer holds the last 84 sets of 8-bit low resolution values or 41 sets of 12bit high resolution values. Once the buffer is full, the oldest data is discarded to make room for newer data.  |
| 1      | 0      | Trigger | When a trigger event occurs, the buffer holds the last data set of SMP[6:0] samples before the trigger event and then continues to collect data until full. New data is collected only when the buffer is not full.  |
| 1      | 1      | FILO    | The buffer holds the last 84 sets of 8-bit low resolution values or 41 sets of 12bit high resolution values. Once the buffer is full, the oldest data is discarded to make room for newer data. Reading from the buffer in this mode will return the most recent data first. |

**Table 23.** Selected Buffer Mode



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## BUF\_STATUS\_REG1

This register reports the status of the sample buffer.

| R/W      | R/W      | R/W      | R/W      | R/W      | R/W                      | R/W      | R/W      |
|----------|----------|----------|----------|----------|--------------------------|----------|----------|
| SMP_LEV7 | SMP_LEV6 | SMP_LEV5 | SMP_LEV4 | SMP_LEV3 | SMP_LEV2                 | SMP_LEV1 | SMP_LEV0 |
| Bit7     | Bit6     | Bit5     | Bit4     | Bit3     | Bit2                     | Bit1     | Bit0     |
|          |          |          |          |          | SPI Write Address: 0x34h |          |          |
|          |          |          |          |          | SPI Read Address: 0xB4h  |          |          |

**SMP\_LEV[7:0] Sample Level;** reports the number of data bytes that have been stored in the sample buffer. When *BUF\_RES=1*, this count will increase by 6 for each 3-axis sample in the buffer; when *BUF\_RES=0*, the count will increase by 3 for each 3-axis sample. If this register reads 0, no data has been stored in the buffer.

## BUF\_STATUS\_REG2

This register reports the status of the sample buffer trigger function.

| R/W      | R/W  | R/W  | R/W  | R/W  | R/W                      | R/W  | R/W  |
|----------|------|------|------|------|--------------------------|------|------|
| BUF_TRIG | 0    | 0    | 0    | 0    | 0                        | 0    | 0    |
| Bit7     | Bit6 | Bit5 | Bit4 | Bit3 | Bit2                     | Bit1 | Bit0 |
|          |      |      |      |      | SPI Write Address: 0x35h |      |      |
|          |      |      |      |      | SPI Read Address: 0xB5h  |      |      |

**BUF\_TRIG** reports the status of the buffer's trigger function if this mode has been selected. When using trigger mode, a buffer read should only be performed after a trigger event.

## BUF\_CLEAR

Latched buffer status information and the entire sample buffer are cleared when any data is written to this register.

| R/W  | R/W  | R/W  | R/W  | R/W  | R/W                      | R/W  | R/W  |
|------|------|------|------|------|--------------------------|------|------|
| X    | X    | X    | X    | X    | X                        | X    | X    |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2                     | Bit1 | Bit0 |
|      |      |      |      |      | SPI Write Address: 0x36h |      |      |
|      |      |      |      |      | SPI Read Address: 0xB6h  |      |      |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## SELF\_TEST

When 0xCA is written to this register, the MEMS self-test function is enabled. Electrostatic-actuation of the accelerometer, results in a DC shift of the X, Y and Z axis outputs. Writing 0x00 to this register will return the accelerometer to normal operation.

| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| 1    | 1    | 0    | 0    | 1    | 0    | 1    | 0    | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00000000                 |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x3Ah |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xBAh  |

## WUF\_THRESH

This register sets the acceleration threshold, WUF Threshold that is used to detect a general motion input. WUF\_THRESH scales with GSEL1-GSEL0 in CTRL\_REG1, and the KXTIA will ship from the factory with this value set to correspond to a change in acceleration of 0.5g when configured to +/- 8g. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to "0".

| R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |                          |
|--------|--------|--------|--------|--------|--------|--------|--------|--------------------------|
| WUFTH7 | WUFTH6 | WUFTH5 | WUFTH4 | WUFTH3 | WUFTH2 | WUFTH1 | WUFTH0 | Reset Value              |
| Bit7   | Bit6   | Bit5   | Bit4   | Bit3   | Bit2   | Bit1   | Bit0   | 00001000                 |
|        |        |        |        |        |        |        |        | SPI Write Address: 0x5Ah |
|        |        |        |        |        |        |        |        | SPI Read Address: 0xDAh  |

## TILT\_ANGLE

This register sets the tilt angle that is used to detect the transition from Face-up/Face-down states to Screen Rotation states. The KXTIA ships from the factory with tilt angle set to a low threshold of 26° from horizontal. A different default tilt angle can be requested from the factory. Note that the minimum suggested tilt angle is 10°. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to "0".

| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |                          |
|------|------|------|------|------|------|------|------|--------------------------|
| TA7  | TA6  | TA5  | TA4  | TA3  | TA2  | TA1  | TA0  | Reset Value              |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | 00001100                 |
|      |      |      |      |      |      |      |      | SPI Write Address: 0x5Ch |
|      |      |      |      |      |      |      |      | SPI Read Address: 0xDCh  |



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

## HYST\_SET

This register sets the Hysteresis that is placed in between the Screen Rotation states. The KXTIA ships from the factory with HYST\_SET set to +/-15° of hysteresis. A different default hysteresis can be requested from the factory. Note that when writing a new value to this register the current values of RES0, RES1 and RES2 must be preserved. These values are set at the factory and must not change. Note that to properly change the value of this register, the PC1 bit in CTRL\_REG1 must first be set to "0".

| R/W  | R/W  | R/W  | R/W   | R/W   | R/W                      | R/W   | R/W   | Reset Value |
|------|------|------|-------|-------|--------------------------|-------|-------|-------------|
| RES2 | RES1 | RES0 | HYST4 | HYST3 | HYST2                    | HYST1 | HYST0 | ---10100    |
| Bit7 | Bit6 | Bit5 | Bit4  | Bit3  | Bit2                     | Bit1  | Bit0  |             |
|      |      |      |       |       | SPI Write Address: 0x6Fh |       |       |             |
|      |      |      |       |       | SPI Read Address: 0xEFh  |       |       |             |

## BUF\_READ

Data in the buffer can be read according to the BUF\_RES and BUF\_M settings in BUF\_CTRL2 by executing this command. More samples can be retrieved by continuing to toggle SCL after the read command is executed. Data should only be read by set (6 bytes for high-resolution samples and 3 bytes for low-resolution samples) and by using auto-increment. Additional samples cannot be written to the buffer while data is being read from the buffer using auto-increment mode. Output data is in 2's Complement format.

| R/W  | R/W  | R/W  | R/W  | R/W  | R/W                      | R/W  | R/W  |
|------|------|------|------|------|--------------------------|------|------|
| X    | X    | X    | X    | X    | X                        | X    | X    |
| Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2                     | Bit1 | Bit0 |
|      |      |      |      |      | SPI Write Address: 0x7Fh |      |      |
|      |      |      |      |      | SPI Read Address: 0xFFh  |      |      |



## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

### KXTIA Embedded Applications

#### Orientation Detection Feature

The orientation detection feature of the KXTIA will report changes in face up, face down, +/- vertical and +/- horizontal orientation. This intelligent embedded algorithm considers very important factors that provide accurate orientation detection from low cost tri-axis accelerometers. Factors such as: hysteresis, device orientation angle and delay time are described below as these techniques are utilized inside the KXTIA.

#### Hysteresis

A 45° tilt angle threshold seems like a good choice because it is halfway between 0° and 90°. However, a problem arises when the user holds the device near 45°. Slight vibrations, noise and inherent sensor error will cause the acceleration to go above and below the threshold rapidly and randomly, so the screen will quickly flip back and forth between the 0° and the 90° orientations. This problem is avoided in the KXTIA by choosing a 30° threshold angle. With a 30° threshold, the screen will not rotate from 0° to 90° until the device is tilted to 60° (30° from 90°). To rotate back to 0°, the user must tilt back to 30°, thus avoiding the screen flipping problem. This example essentially applies +/- 15° of hysteresis in between the four screen rotation states. Table 24 shows the acceleration limits implemented for  $\phi_T = 30^\circ$ .

| Orientation | X Acceleration (g) | Y Acceleration (g) |
|-------------|--------------------|--------------------|
| 0°/360°     | $-0.5 < a_x < 0.5$ | $a_y > 0.866$      |
| 90°         | $a_x > 0.866$      | $-0.5 < a_y < 0.5$ |
| 180°        | $-0.5 < a_x < 0.5$ | $a_y < -0.866$     |
| 270°        | $a_x < -0.866$     | $-0.5 < a_y < 0.5$ |

**Table 24.** Acceleration at the four orientations with +/- 15° of hysteresis

The KXTIA allows the user to change the amount of hysteresis in between the four screen rotation states. By simply writing to the HYST\_SET register, the user can adjust the amount of hysteresis up to +/- 45°. The plot in Figure 9 shows the typical amount of hysteresis applied for a given digital count value of HYST\_SET.





# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

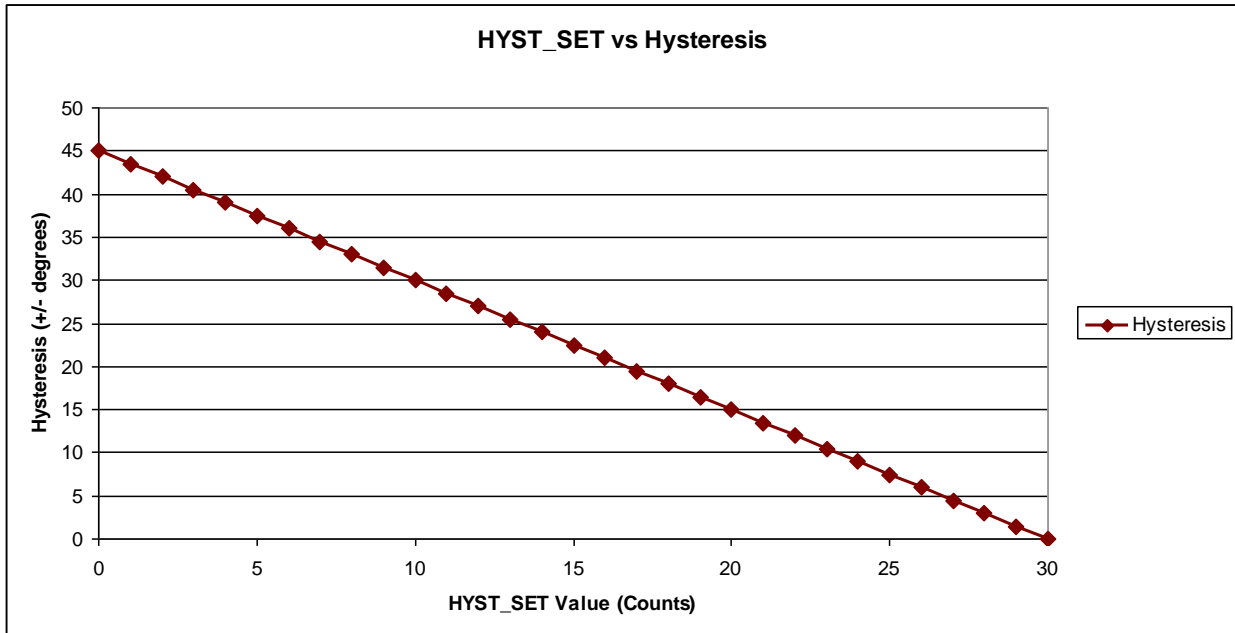


Figure 9. HYST\_SET vs Hysteresis

## Device Orientation Angle (aka Tilt Angle)

To ensure that horizontal and vertical device orientation changes are detected, even when it isn't in the ideal vertical orientation – where the angle  $\theta$  in Figure 10 is  $90^\circ$ , the KXTIA considers device orientation angle in its algorithm.




Figure 10. Device Orientation Angle

As the angle in Figure 2 is decreased, the maximum gravitational acceleration on the X-axis or Y-axis will also decrease. Therefore, when the angle becomes small enough, the user will not be able to make



## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

the screen orientation change. When the device orientation angle approaches  $0^\circ$  (device is flat on a desk or table),  $a_x = a_y = 0g$ ,  $a_z = +1g$ , and there is no way to determine which way the screen should be oriented, the internal algorithm determines that the device is in either the face-up or face-down orientation, depending on the sign of the z-axis. The KXTIA will only change the screen orientation when the orientation angle is above the factory-defaulted/user-defined threshold set in the TILT\_ANGLE register. Equation 2 can be used to determine what value to write to the TILT\_ANGLE register to set the device orientation angle.

$$\text{TILT\_ANGLE (counts)} = \sin \theta * (32 \text{ (counts/g)})$$

**Equation 2.** Tilt Angle Threshold

### Tilt Timer

The 8-bit register, TILT\_TIMER can be used to qualify changes in orientation. The KXTIA does this by incrementing a counter with a size that is specified by the value in TILT\_TIMER for each set of acceleration samples to verify that a change to a new orientation state is maintained. A user defined output data rate (ODR) determines the time period for each sample. Equation 3 shows how to calculate the TILT\_TIMER register value for a desired delay time.

$$\text{TILT\_TIMER (counts)} = \text{Delay Time (sec)} \times \text{ODR (Hz)}$$

**Equation 3.** Tilt Position Delay Time

### Motion Interrupt Feature Description

The Motion interrupt feature of the KXTIA reports qualified changes in the high-pass filtered acceleration based on the Wake Up (WUF) threshold. If the high-pass filtered acceleration on any axis is greater than the user-defined wake up threshold (WUF\_THRESH), the device has transitioned from an inactive state to an active state. When configured in the unlatched mode, the KXTIA will report when the motion event finished and the device has returned to an inactive state. Equation 4 shows how to calculate the WUF\_THRESH register value for a desired wake up threshold. Note that this calculation varies based on the configured g-range of the part.

$$\text{WUF\_THRESH (counts)} = \text{Wake Up Threshold (g)} \times \text{Sensitivity (counts/g)}$$

**Equation 4.** Wake Up Threshold

|   |   |  |
|---|---|--|
|  | <b>± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications</b> | <b>PART NUMBER:</b><br><br><b>KXTIA-1006</b><br><b>Rev. 4</b><br><b>Dec-2012</b> |
|---|---|--|


A WUF (WUF\_TIMER) 8-bit raw unsigned value represents a counter that permits the user to qualify each active/inactive state change. Note that each WUF Timer count qualifies 1 (one) user-defined ODR period (OWUF). Equation 5 shows how to calculate the WUF\_TIMER register value for a desired wake up delay time.

$$\text{WUF\_TIMER (counts)} = \text{Wake Up Delay Time (sec)} \times \text{OWUF (Hz)}$$

**Equation 5. Wake Up Delay Time**

Figure 11 below shows the latched response of the motion detection algorithm with WUF Timer = 10 counts.

### Typical Motion Interrupt Example

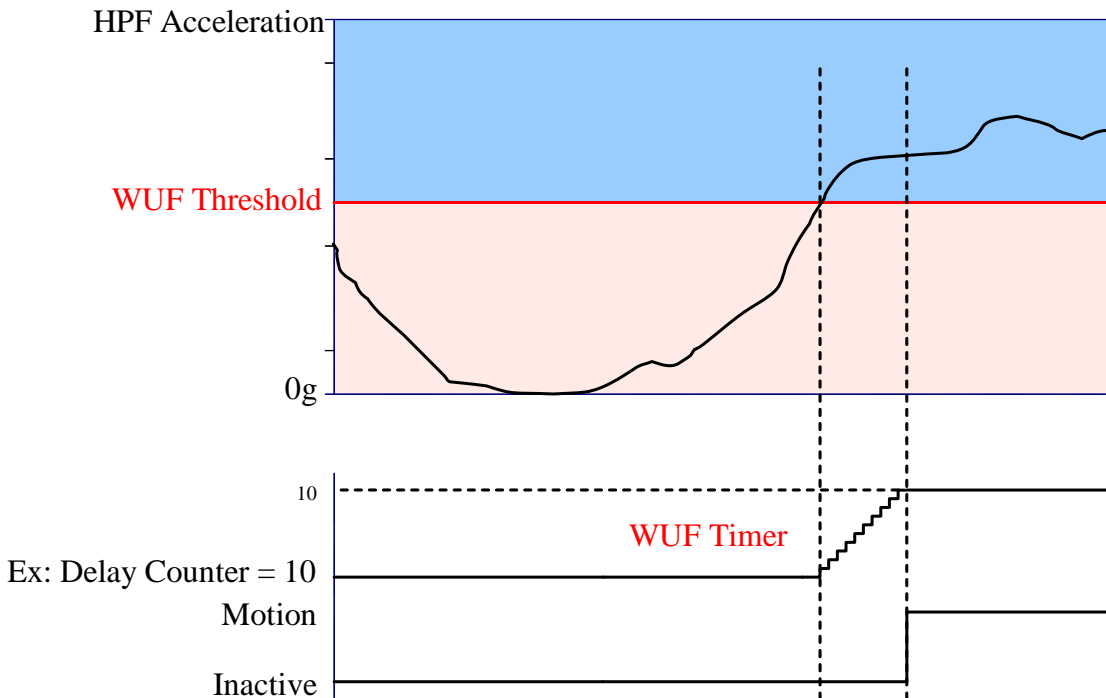

**Figure 11. Latched Motion Interrupt Response**

Figure 12 below shows the unlatched response of the motion detection algorithm with WUF Timer = 10 counts.



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Typical Motion Interrupt Example

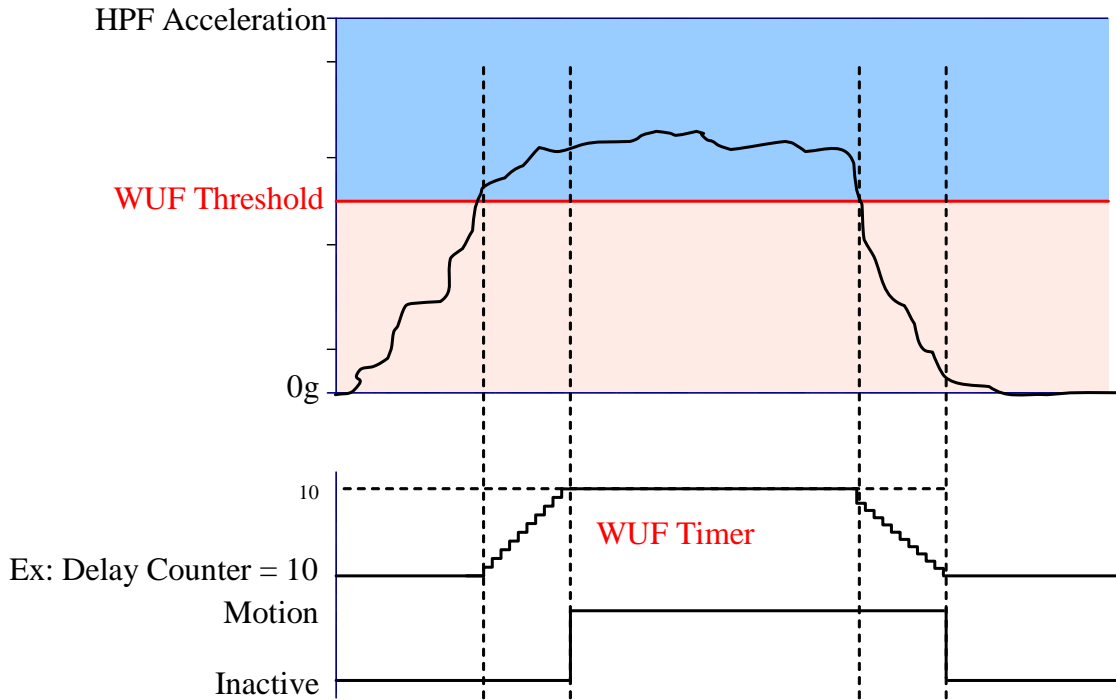


Figure 12. Unlatched Motion Interrupt Response



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Directional Tap Detection Feature Description

The Directional Tap Detection feature of the KXTIA recognizes single and double tap inputs and reports the acceleration axis and direction that each tap occurred. Eight performance parameters, as well as a user-selectable ODR are used to configure the KXTIA for a desired tap detection response.

### Performance Index

The Directional Tap™ detection algorithm uses low and high thresholds to help determine when a tap event has occurred. A tap event is detected when the previously described jerk summation exceeds the low threshold (TDT\_L\_THRESH) for more than the tap detection low limit, but less than the tap detection high limit as contained in TDT\_TAP\_TIMER. Samples that exceed the high limit (TDT\_H\_THRESH) will be ignored. Figure 13 shows an example of a single tap event meeting the performance index criteria.

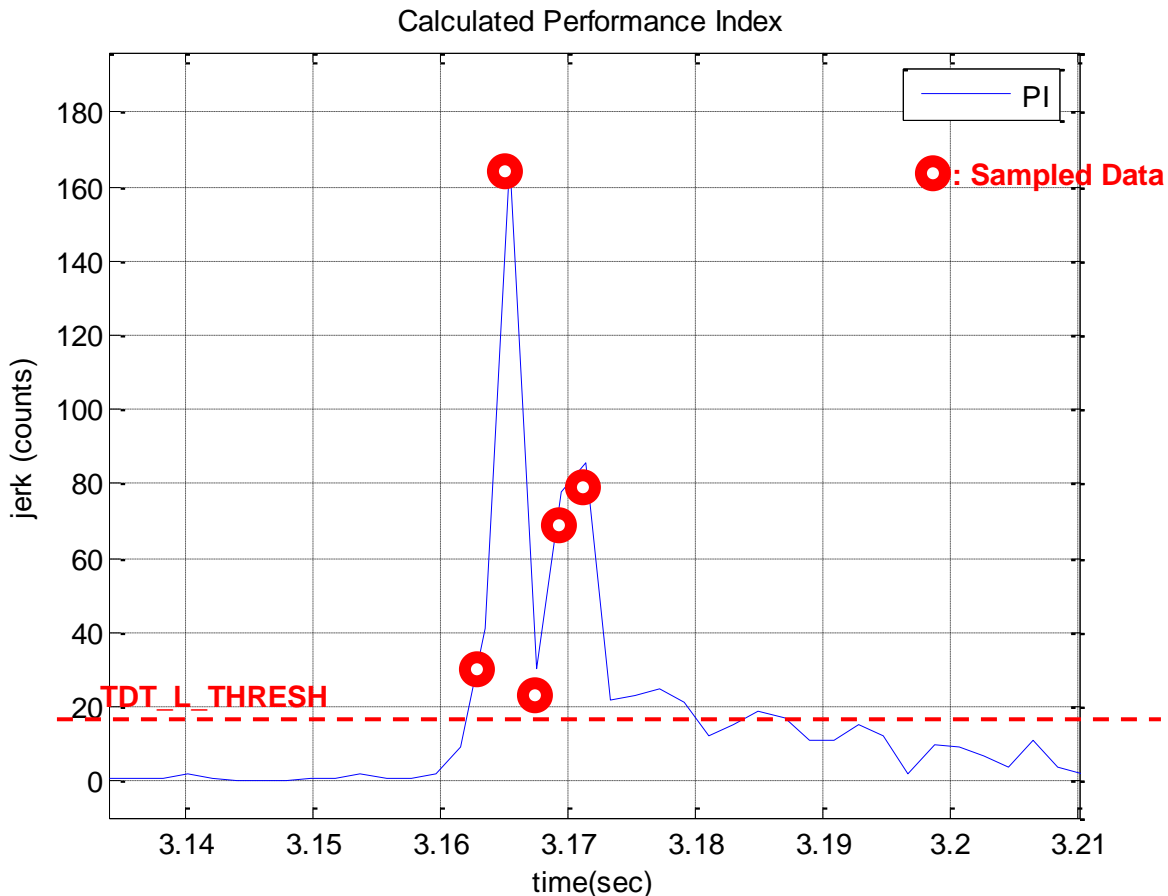


Figure 13. Jerk Summation vs Threshold



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Single Tap Detection

The latency timer (TDT\_LATENCY\_TIMER) sets the time period that a tap event will only be characterized as a single tap. A second tap has to occur outside of the latency timer. If a second tap occurs inside the latency time, it will be ignored as it occurred too quickly. The single tap will be reported at the end of the TDT\_WINDOW\_TIMER. Figure 14 shows a single tap event meeting the PI, latency and window requirements.

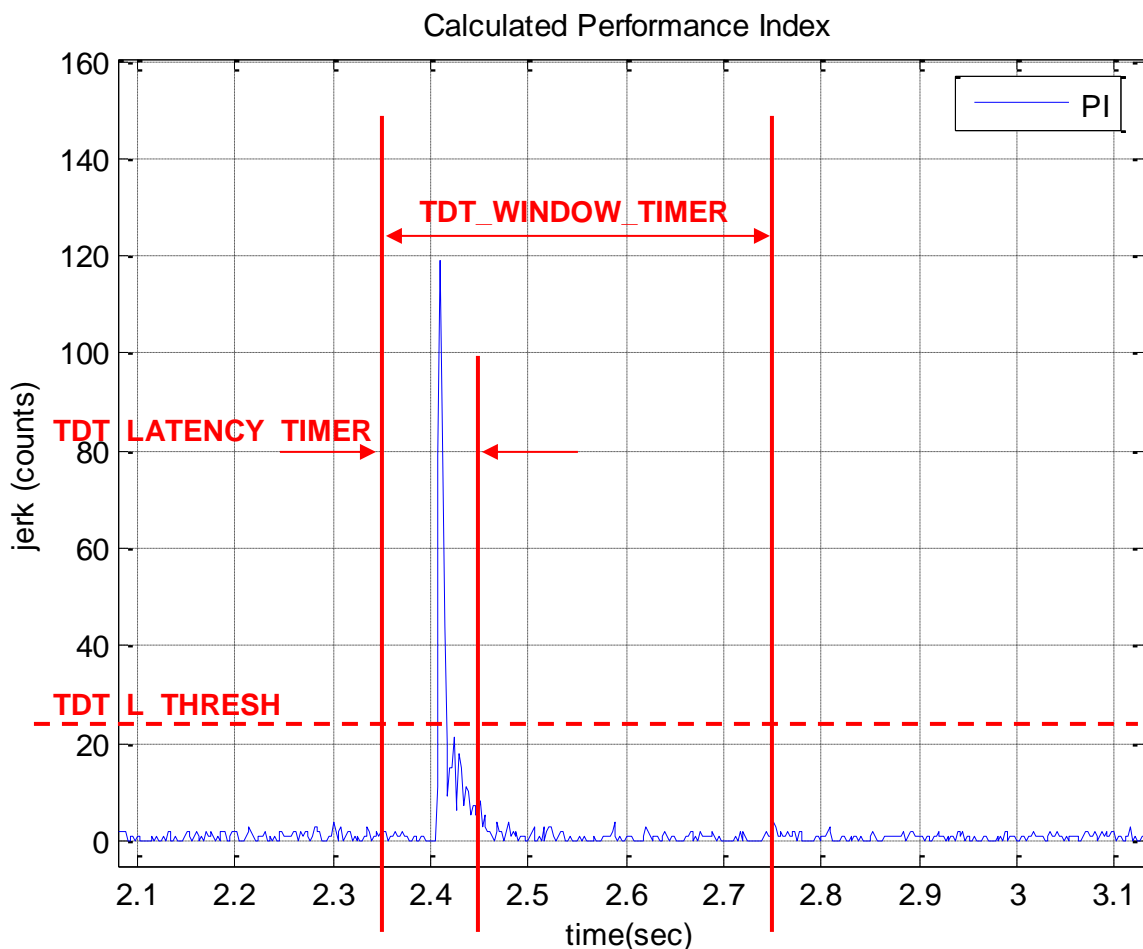


Figure 14. Single Directional Tap™ Timing



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

## Double Tap Detection

An event can be characterized as a double tap only if the second tap crosses the performance index (TDT\_L\_THRESH) outside the TDT\_TIMER. This means that the TDT\_TIMER determines the minimum time separation that must exist between the two taps of a double tap event. Similar to the single tap, the second tap event must exceed the performance index for the time limit contained in TDT\_TAP\_TIMER. The double tap will be reported at the end of the second TDT\_LATENCY\_TIMER. Figure 15 shows a double tap event meeting the PI, latency and window requirements.

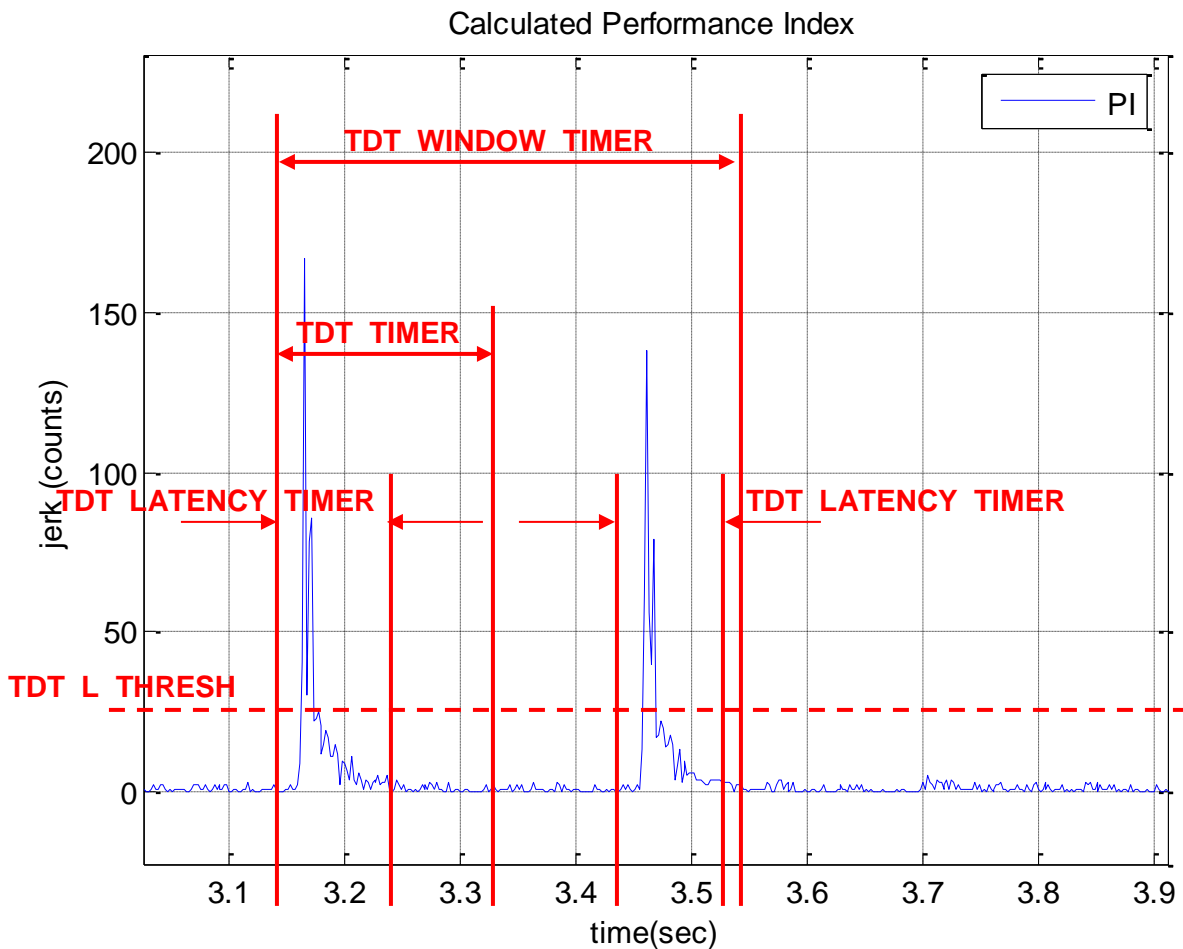


Figure 15. Double Directional Tap™ Timing



## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

### Sample Buffer Feature Description

The sample buffer feature of the KXTIA accumulates and outputs acceleration data based on how it is configured. There are 4 buffer modes available, and samples can be accumulated at either low (8-bit) or high (12-bit) resolution. Acceleration data is collected at the ODR specified by OSAA:OSAD in the Output Data Control Register. Each buffer mode accumulates data, reports data, and interacts with status indicators in a slightly different way.

#### FIFO Mode

##### Data Accumulation

Sample collection stops when the buffer is full.

##### Data Reporting

Data is reported with the oldest byte of the oldest sample first (X<sub>L</sub> or X based on resolution).

##### Status Indicators

A watermark interrupt occurs when the number of samples in the buffer reaches the Sample Threshold. The watermark interrupt stays active until the buffer contains less than this number of samples. This can be accomplished through clearing the buffer or explicitly reading greater than SMPX samples (calculated with Equation 6).

BUF\_RES=0:

$$\text{SMPX} = \text{SMP\_LEV}[7:0] / 3 - \text{SMP\_TH}[6:0]$$

BUF\_RES=1:

$$\text{SMPX} = \text{SMP\_LEV}[7:0] / 6 - \text{SMP\_TH}[6:0]$$

**Equation 6.** Samples Above Sample Threshold

#### Stream Mode

##### Data Accumulation

Sample collection continues when the buffer is full; older data is discarded to make room for newer data.

##### Data Reporting

Data is reported with the oldest sample first (uses FIFO read pointer).

##### Status Indicators

A watermark interrupt occurs when the number of samples in the buffer reaches the Sample Threshold. The watermark interrupt stays active until the buffer contains less than this number of samples. This can be accomplished through clearing the buffer or explicitly reading greater than SMPX samples (calculated with Equation 1).





## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

PART NUMBER:

KXTIA-1006  
Rev. 4  
Dec-2012

### Trigger Mode

#### Data Accumulation

When a physical interrupt is caused by one of the digital engines, the trigger event is asserted and SMP[6:0] samples prior to the event are retained. Sample collection continues until the buffer is full.

#### Data Reporting

Data is reported with the oldest sample first (uses FIFO read pointer).

#### Status Indicators

When a physical interrupt occurs and there are at least SMP[6:0] samples in the buffer, BUF\_TRIG in BUF\_STATUS\_REG2 is asserted.

### FILO Mode

#### Data Accumulation

Sample collection continues when the buffer is full; older data is discarded to make room for newer data.

#### Data Reporting

Data is reported with the newest byte of the newest sample first (Z\_H or Z based on resolution).

#### Status Indicators

A watermark interrupt occurs when the number of samples in the buffer reaches the Sample Threshold. The watermark interrupt stays active until the buffer contains less than this number of samples. This can be accomplished through clearing the buffer or explicitly reading greater than SMPX samples (calculated with Equation 1).

### Buffer Operation

The following diagrams illustrate the operation of the buffer conceptually. Actual physical implementation has been abstracted to offer a simplified explanation of how the different buffer modes operate. Figure 1 represents a high-resolution 3-axis sample within the buffer. Figures 2-10 represent a 10-sample version of the buffer (for simplicity), with Sample Threshold set to 8.


Regardless of the selected mode, the buffer fills sequentially, one byte at a time. Figure 16 shows one 6-byte data sample. Note the location of the FILO read pointer versus that of the FIFO read pointer.



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications


**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

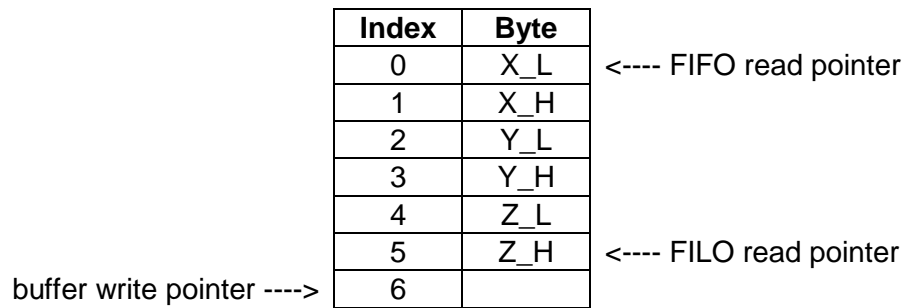

**Figure 16. One Buffer Sample**

Regardless of the selected mode, the buffer fills sequentially, one sample at a time. Note in Figure 17 the location of the FILO read pointer versus that of the FIFO read pointer. The buffer write pointer shows where the next sample will be written to the buffer.

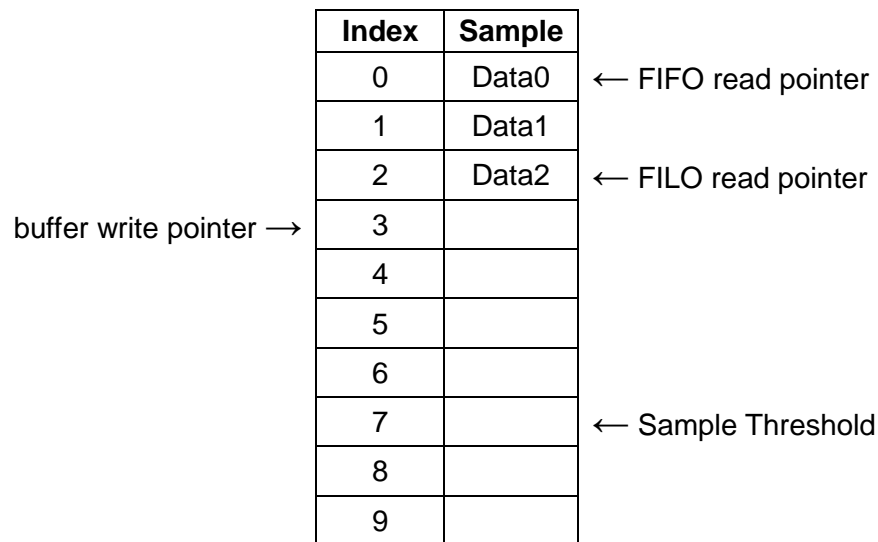

**Figure 17. Buffer Filling**




# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**


**KXTIA-1006  
Rev. 4  
Dec-2012**

The buffer continues to fill sequentially until the Sample Threshold is reached. Note in Figure 18 the location of the FILO read pointer versus that of the FIFO read pointer.

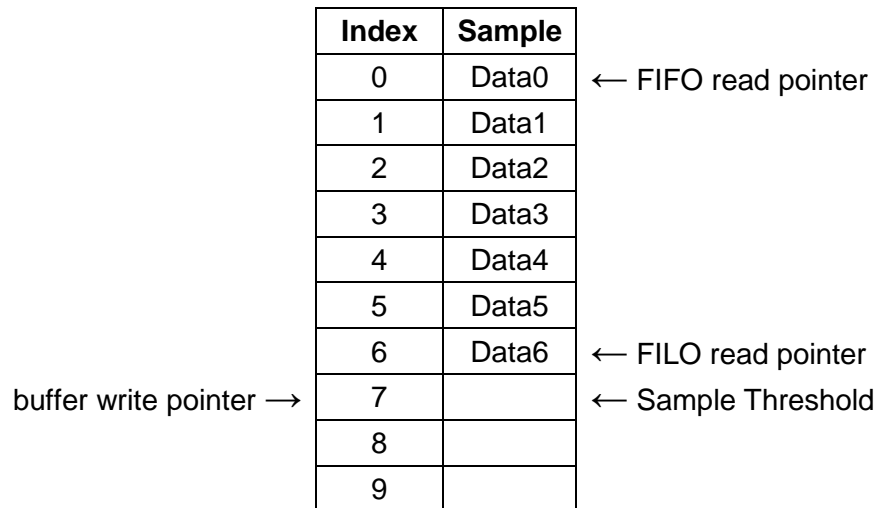

**Figure 18.** Buffer Approaching Sample Threshold

In FIFO, Stream, and FILO modes, a watermark interrupt is issued when the number of samples in the buffer reaches the Sample Threshold. In trigger mode, this is the point where the oldest data in the buffer is discarded to make room for newer data.

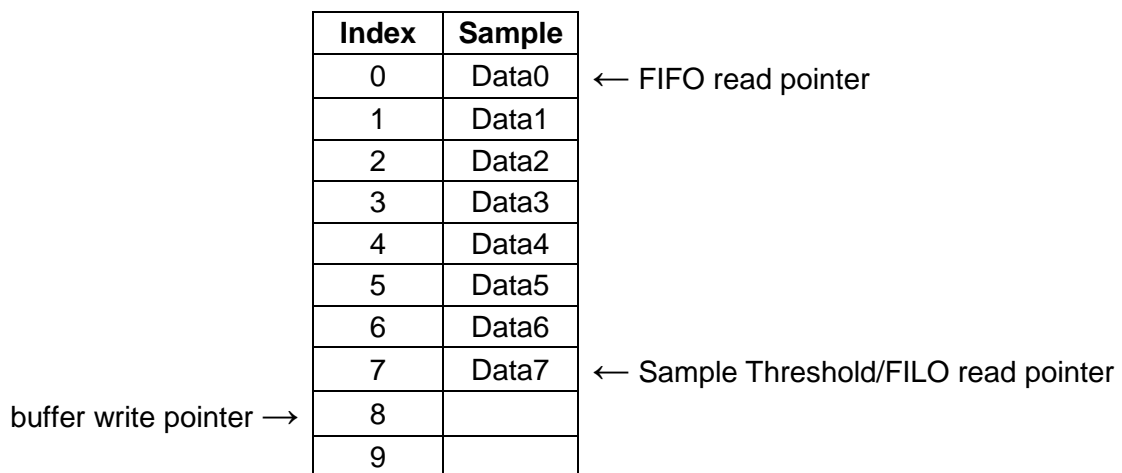

**Figure 19.** Buffer at Sample Threshold




## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**


**KXTIA-1006  
Rev. 4  
Dec-2012**

In trigger mode, data is accumulated in the buffer sequentially until the Sample Threshold is reached. Once the Sample Threshold is reached, the oldest samples are discarded when new samples are collected. Note in Figure 20 how Data0 was thrown out to make room for Data8.

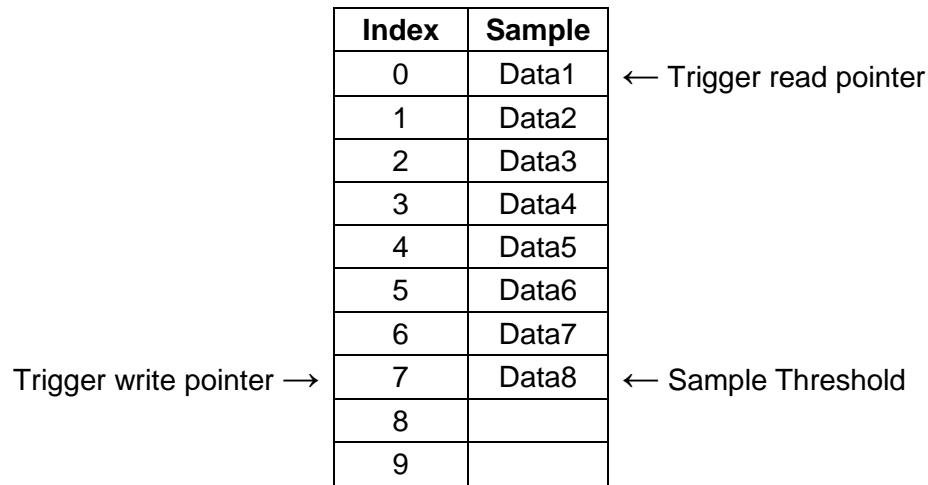

**Figure 20.** Additional Data Prior to Trigger Event

After a trigger event occurs, the buffer no longer discards the oldest samples, and instead begins accumulating samples sequentially until full. The buffer then stops collecting samples, as seen in Figure 21. This results in the buffer holding SMP\_TH[6:0] samples prior to the trigger event, and SMPX samples after the trigger event.

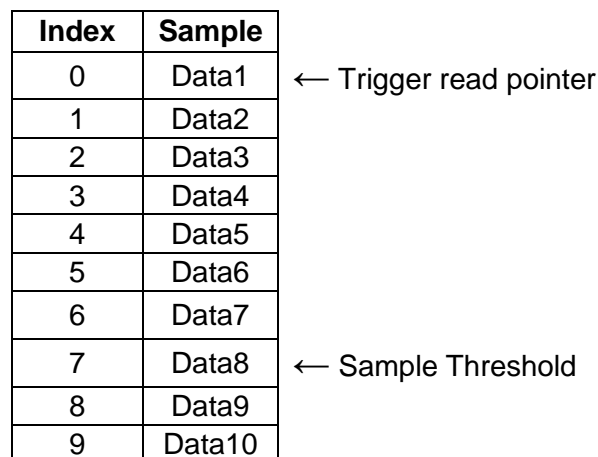

**Figure 21.** Additional Data After Trigger Event



# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

In FIFO, Stream, FILO, and Trigger (after a trigger event has occurred) modes, the buffer continues filling sequentially after the Sample Threshold is reached. Sample accumulation after the buffer is full depends on the selected operation mode. FIFO and Trigger modes stop accumulating samples when the buffer is full, and Stream and FILO modes begin discarding the oldest data when new samples are accumulated.

| Index | Sample |                     |
|-------|--------|---------------------|
| 0     | Data0  | ← FIFO read pointer |
| 1     | Data1  |                     |
| 2     | Data2  |                     |
| 3     | Data3  |                     |
| 4     | Data4  |                     |
| 5     | Data5  |                     |
| 6     | Data6  |                     |
| 7     | Data7  | ← Sample Threshold  |
| 8     | Data8  |                     |
| 9     | Data9  | ← FILO read pointer |

**Figure 22.** Buffer Full

After the buffer has been filled in FILO or Stream mode, the oldest samples are discarded when new samples are collected. Note in Figure 23 how Data0 was thrown out to make room for Data10.

| Index | Sample |                     |
|-------|--------|---------------------|
| 0     | Data1  | ← FIFO read pointer |
| 1     | Data2  |                     |
| 2     | Data3  |                     |
| 3     | Data4  |                     |
| 4     | Data5  |                     |
| 5     | Data6  |                     |
| 6     | Data7  |                     |
| 7     | Data8  | ← Sample Threshold  |
| 8     | Data9  |                     |
| 9     | Data10 | ← FILO read pointer |

**Figure 23.** Buffer Full – Additional Sample Accumulation in Stream or FILO Mode




# ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**


**KXTIA-1006  
Rev. 4  
Dec-2012**

In FIFO, Stream, or Trigger mode, reading one sample from the buffer will remove the oldest sample and effectively shift the entire buffer contents up, as seen in Figure 24.

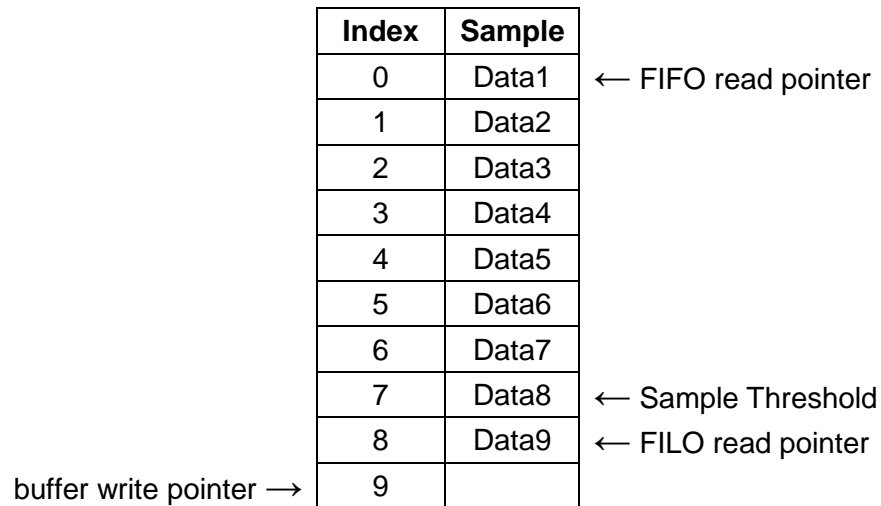

**Figure 24.** FIFO Read from Full Buffer

In FILO mode, reading one sample from the buffer will remove the newest sample and leave the older samples untouched, as seen in Figure 25.

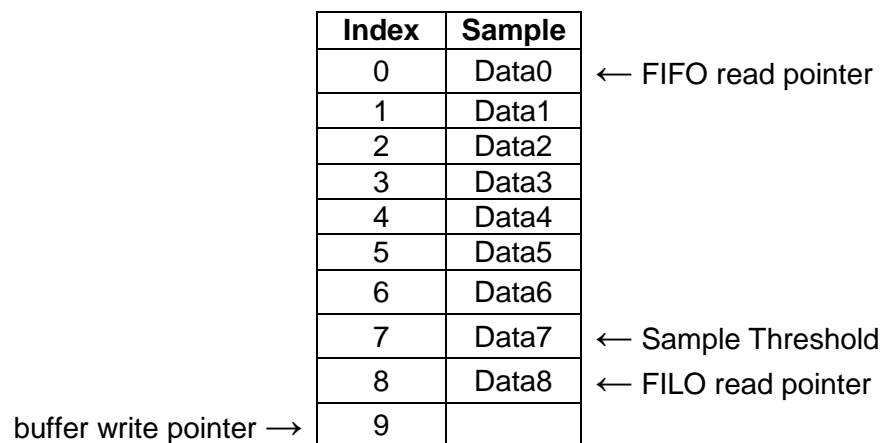

**Figure 25.** FILO Read from Full Buffer



## ± 2g / 4g / 8g Tri-axis Digital Accelerometer Specifications

**PART NUMBER:**

**KXTIA-1006  
Rev. 4  
Dec-2012**

### Revision History

| REVISION | DESCRIPTION                                | DATE        |
|----------|--|-------------|
| 1        | Initial Product Release                    | 19-Jul-2011 |
| 2        | Updated SPI Timing Diagrams                | 02-Apr-2012 |
| 3        | Updated Dimension Drawing                  | 29-Jun-2012 |
| 4        | Included WUF description into INT_SRC_REG2 | 20-Dec-2012 |

"Kionix" is a registered trademark of Kionix, Inc. Products described herein are protected by patents issued or pending. No license is granted by implication or otherwise under any patent or other rights of Kionix. The information contained herein is believed to be accurate and reliable but is not guaranteed. Kionix does not assume responsibility for its use or distribution. Kionix also reserves the right to change product specifications or discontinue this product at any time without prior notice. This publication supersedes and replaces all information previously supplied.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Accelerometers](#) category:*

*Click to view products by [Kionix](#) manufacturer:*

Other Similar products are found below :

[AD22372Z-RL7](#) [ADXL313WACPZ-RL](#) [805M1-0050-01](#) [MXC6655XA](#) [MMA7455LT](#) [805M1-0200-01](#) [810M1-0025X](#) [832M1-0200](#)  
[AIS328DQTR](#) [832M1-0050](#) [805-0050](#) [AD22301](#) [BMA253](#) [ADXL354BEZ](#) [SCA620-EF8H1A-1](#) [MC3413](#) [MXC6244AU](#) [3038-0500](#) [ACH-](#)  
[01-04/10](#) [4692](#) [ADXL372BCCZ-RL7](#) [735T](#) [787-500](#) [787AM8](#) [793-6](#) [793L](#) [997-M4](#) [HV101](#) [HV102](#) [HV200](#) [PC420VP-50](#) [PC420VR-10](#)  
[786A](#) [786A-IS](#) [787A](#) [787A-IS](#) [HT786A](#) [HT787A](#) [PC420VP-10](#) [ADCMXL1021-1BMLZ](#) [ADIS16003CCCZ](#) [ADIS16006CCCZ](#)  
[ADIS16228CMLZ](#) [ADXL700WBRWZ-RL](#) [ADXL1003BCPZ](#) [ADXL103CE-REEL](#) [ADXL203CE-REEL](#) [ADXL206HDZ](#) [ADXL213AE](#)  
[ADXL213AE-REEL](#)