

**NEW**



Quality and reliability is our tradition

**KYORITSU**

## VOLTAGE DETECTOR VOLT STICK KEW 5711

# Non-Contact Voltage Detector with LED Light

Actual Size

- **Beep sound and red LED indicate AC voltage presence**
- **Bright white LED light integrated into the tip**
- **Auto check function for battery and internal circuit**
- **Dual sensitivity**



### Voltage detection:

Tip glows red and buzzer sounds when voltage is detected.

The simplest way to know if voltage is present!



KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.


<http://www.kew-ltd.co.jp>

## ● KEW 5711 Specifications

Operating voltage	AC 90-1000 V (Lo sensitivity)
	AC 20-1000 V (Hi sensitivity)
Frequency range	50/60Hz
Operating temp. range	-10 to 50°C
Storage temp. range	-20 to 60°C
Safety Standard	IEC 61010-1 CAT IV 600V /CAT III 1000V Pollution degree 2
Power source	R03/LR03 (AAA) (1.5V) x 2
Low battery warning	Glow tip quickly flashes in red five times.
Dimension	153(L) x Φ20mm
Weight	Approx. 40g (including batteries)
Accessories	LR03(AAA) x 2, Instruction manual


## Designed to meet IEC61010-1

The unit is designed to CAT IV 600V and CAT III 1000V and can be used in various locations safely.

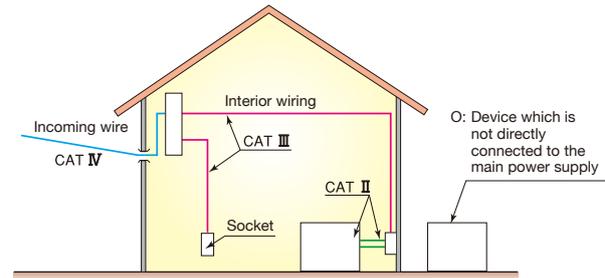

## Dual sensitivity

Low(Lo) sensitivity helps to recognise the Phase from Neutral in sockets.  
High(Hi) sensitivity for checking the presence of voltage from a further distance.

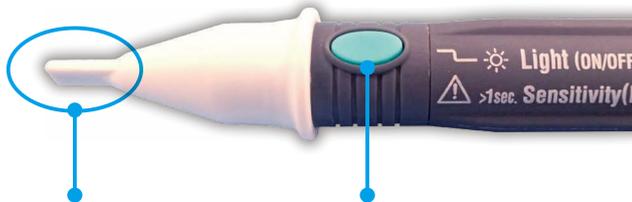

Detector tip

Short press: LED Light ON/ OFF  
Long press: Switches sensitivity



High(Hi) sensitivity may be useful for locating wires behind walls.

## Powerful flashlight



## Ready to use without power-on

KEW 5711 is always ON = ready to use. This is a big safety advantage because you do not have to remember to switch it ON and it always indicates the dangerous presence of voltage.

Always ON does not affect the battery duration because it uses a special low power circuit. Battery life > 1 year (standby).

**\*Always check the unit on a known live source before use.**

## Self-Function test

KEW 5711 performs self-function test when button is pressed. When abnormality is found at the test, it gives 3 short beeps, 3 long beeps, 3 short beeps (Morse code for SOS); the abnormality may be either temporary or permanent.

**! Safety Warnings :** Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

■ For inquires or orders :



**KYORITSU ELECTRICAL  
INSTRUMENTS  
WORKS, LTD.**

2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan

Phone:+81-3-3723-0131

Fax:+81-3-3723-0152

E-mail:info-eng@kew-ltd.co.jp

<http://www.kew-ltd.co.jp>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Battery Testers](#) category:*

*Click to view products by [Kyoritsu](#) manufacturer:*

Other Similar products are found below :

[1013-189](#) [2100-DELTA](#) [2100-GAMMA PRO](#) [BA6010](#) [TLKB1](#) [BA6011](#) [44309](#) [44319](#) [9072-D](#) [BATTEST](#) [DUSPOL ANALOG 1000](#)  
[DUSPOL DIGITAL 1000](#) [DUSPOL EXPERT 1000](#) [KEW5711](#) [METRAVOLT 12D +L](#) [P 1030](#) [P 1031](#) [P 1032](#) [P 1090](#) [P 1095](#) [P 1096](#)  
[PROFISAFE 690L](#) [RB-02](#) [RB-03](#) [RB-15C](#) [RB-168](#) [SEFRAM12](#) [SEFRAM40](#) [SEFRAM62](#) [SEFRAM66](#) [T6-1000PRO/EU](#) [UT12D-EU](#)  
[UT12M-EU](#) [UT15B](#) [UT15C](#) [UT658DUAL](#) [VTTEST21](#) [WMGBP4](#) [WMGBP5](#) [WMGBP6](#) [BAT-200](#) [600B](#) [601](#) [601B](#) [603B](#) [106990329](#)