

FEATURES


- Low current.(max.100mA).
- Low voltage..

APPLICATIONS

- General purpose switching and amplification.

ORDERING INFORMATION

Type No.	Marking	Package Code
BC856A/B	3A/3B	SOT-23
BC857A/B/C	3E/3F/3G	SOT-23
BC858A/B/C	3J/3K/3L	SOT-23



SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	1.0 Typical	
D	0.4 Typical	
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.1 Typical	
K	2.20	2.60


All Dimensions in mm

MAXIMUM RATING @ $T_a=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	BC856 -80	V
		BC857 -50	
		BC858 -30	
V_{CEO}	Collector-Emitter Voltage	BC856 -65	V
		BC857 -45	
		BC858 -30	
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-0.1	A
P_c	Collector Dissipation	250	mW
T_j, T_{stg}	Junction and Storage Temperature	-65 to +150	°C


ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage BC856 BC857 BC858	$V_{(BR)CBO}$	$I_C=-10\mu\text{A}, I_E=0$	-80			V
			-50			
			-30			
Collector-emitter breakdown voltage BC856 BC857 BC858	$V_{(BR)CEO}$	$I_C=-10\text{mA}, I_B=0$	-65			V
			-45			
			-30			
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-1\mu\text{A}, I_C=0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB}=-30\text{V}, I_E=0$		-1	-15	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=-5\text{V}, I_C=0$			-0.1	μA
DC current gain	BC856A,857A,858A BC856B,857B,858B BC857C,858C		h_{FE}	$V_{CE}=-5\text{V}, I_C=-2\text{mA}$	125 220 420	250 475 800
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-100\text{mA}, I_B=-5\text{mA}$ $I_C=-10\text{mA}, I_B=-0.5\text{mA}$			-0.65 -0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=-10\text{mA}, I_B=-0.5\text{mA}$ $I_C=-100\text{mA}, I_B=-5\text{mA}$		-0.7 -0.85		V
Base-emitter voltage	$V_{BE(on)}$	$I_C=-2\text{mA}, V_{CE}=-5\text{V}$ $I_C=-10\text{mA}, V_{CE}=-5\text{V}$	-0.6	-0.65	-0.75 -0.82	V
collector capacitance	C_c	$V_{CB}=-10\text{V}, I_e=0$ $f=1\text{MHz}$		4.5		pF
Transition frequency	F	$I_C=-200\mu\text{A}, V_{CE}=-5\text{V}$, $R_s=2\text{k}\Omega, f=1\text{kHz}$, $B=200\text{Hz}$		2	10	dB
Transition frequency	f_T	$V_{CE}=-5\text{V}, I_C= -10\text{mA}$ $f=100\text{MHz}$	100			MHz

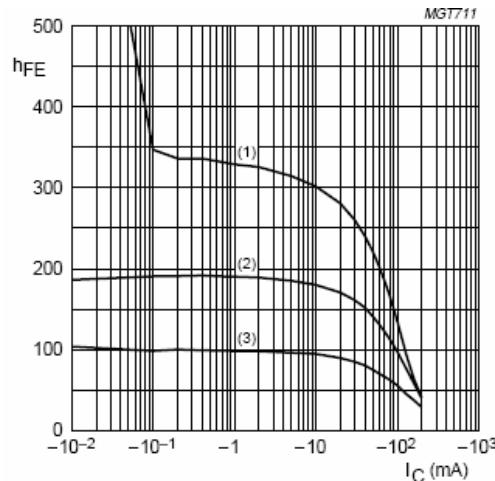TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

BC857A; $V_{CE} = -5 \text{ V}$.


- (1) $T_{\text{amb}} = 150^\circ\text{C}$.
- (2) $T_{\text{amb}} = 25^\circ\text{C}$.
- (3) $T_{\text{amb}} = -55^\circ\text{C}$.

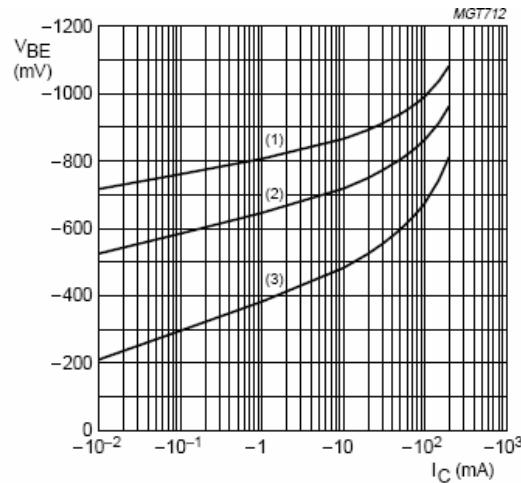Fig.1 DC current gain as a function of collector current; typical values.


BC857A; $V_{CE} = -5 \text{ V}$.


- (1) $T_{\text{amb}} = -55^\circ\text{C}$.
- (2) $T_{\text{amb}} = 25^\circ\text{C}$.
- (3) $T_{\text{amb}} = 150^\circ\text{C}$.

Fig.2 Base-emitter voltage as a function of collector current; typical values.

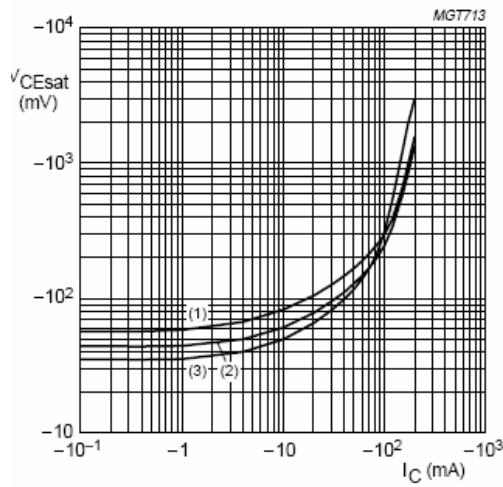
BC857A; $I_C/I_B = 20$.


- (1) $T_{\text{amb}} = 150^\circ\text{C}$.
- (2) $T_{\text{amb}} = 25^\circ\text{C}$.
- (3) $T_{\text{amb}} = -55^\circ\text{C}$.

Fig.3 Collector-emitter saturation voltage as a function of collector current; typical values.

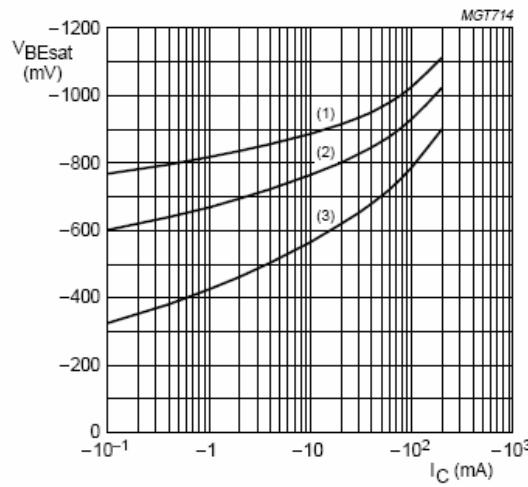
BC857A; $I_C/I_B = 20$.


- (1) $T_{\text{amb}} = -55^\circ\text{C}$.
- (2) $T_{\text{amb}} = 25^\circ\text{C}$.
- (3) $T_{\text{amb}} = 150^\circ\text{C}$.

Fig.4 Base-emitter saturation voltage as a function of collector current; typical values.

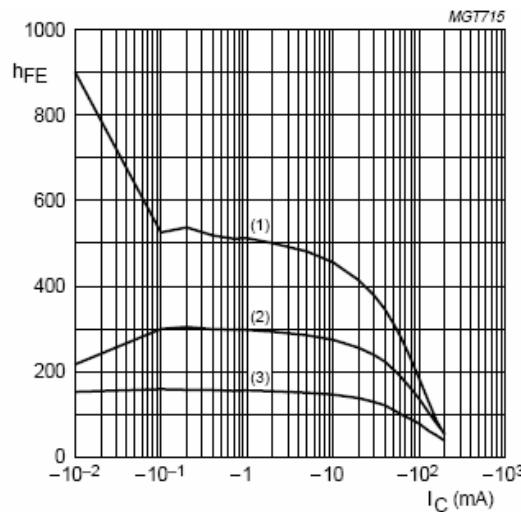


BC857B; $V_{CE} = -5$ V.
(1) $T_{amb} = 150$ °C.
(2) $T_{amb} = 25$ °C.
(3) $T_{amb} = -55$ °C.

Fig.5 DC current gain as a function of collector current; typical values.

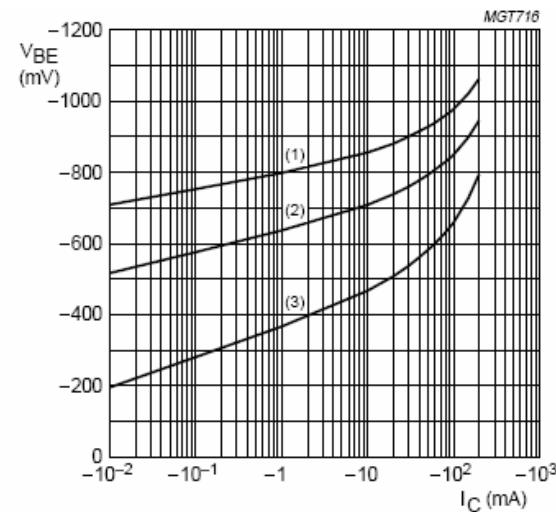


BC857B; $V_{CE} = -5$ V.
(1) $T_{amb} = -55$ °C.
(2) $T_{amb} = 25$ °C.
(3) $T_{amb} = 150$ °C.

Fig.6 Base-emitter voltage as a function of collector current; typical values.

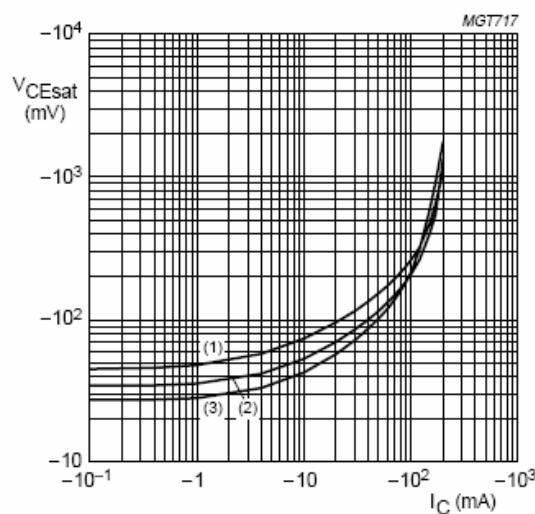


BC857B; $I_C/I_B = 20$.
(1) $T_{amb} = 150$ °C.
(2) $T_{amb} = 25$ °C.
(3) $T_{amb} = -55$ °C.

Fig.7 Collector-emitter saturation voltage as a

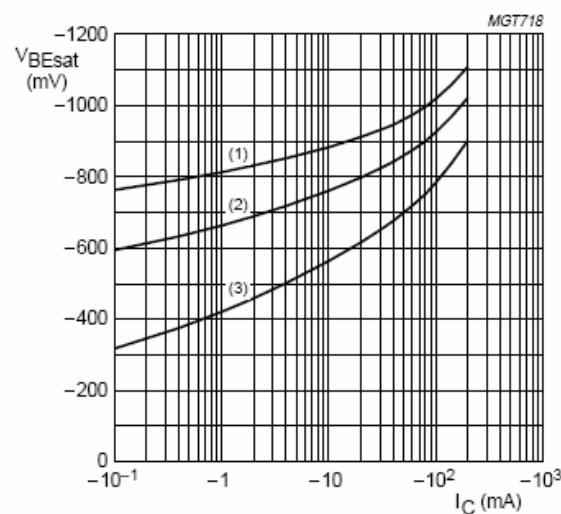

BC857B; $I_C/I_B = 20$.
(1) $T_{amb} = -55$ °C.
(2) $T_{amb} = 25$ °C.
(3) $T_{amb} = 150$ °C.


Fig.8 Base-emitter saturation voltage as a

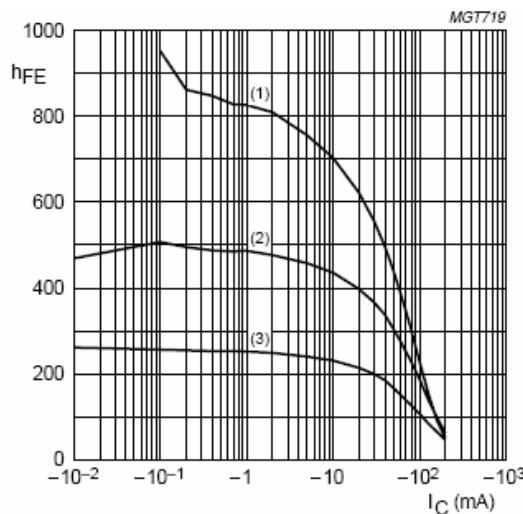

BC857C; $V_{CE} = -5$ V.

- (1) $T_{amb} = 150$ °C.
- (2) $T_{amb} = 25$ °C.
- (3) $T_{amb} = -55$ °C.


Fig.9 DC current gain as a function of collector current; typical values.

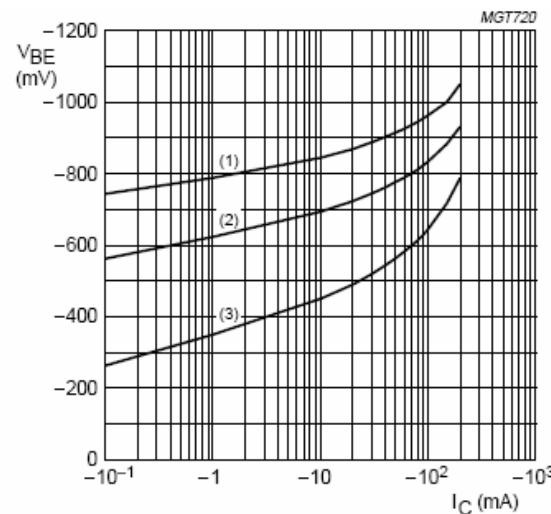

BC857C; $V_{CE} = -5$ V.

- (1) $T_{amb} = -55$ °C.
- (2) $T_{amb} = 25$ °C.
- (3) $T_{amb} = 150$ °C.


Fig.10 Base-emitter voltage as a function of collector current; typical values.

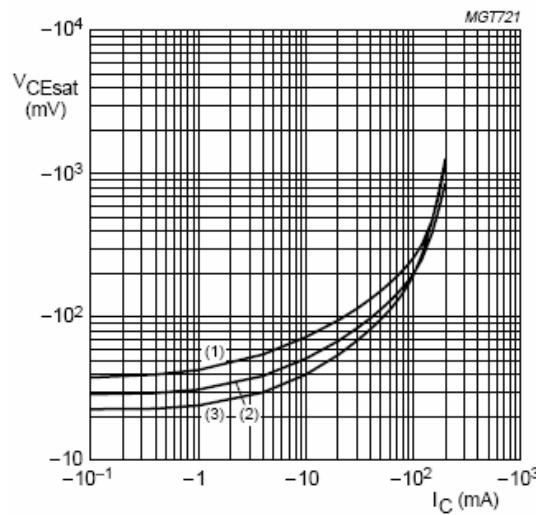

BC857C; $I_C/I_B = 20$.

- (1) $T_{amb} = 150$ °C.
- (2) $T_{amb} = 25$ °C.
- (3) $T_{amb} = -55$ °C.

Fig.11 Collector-emitter saturation voltage as a function of collector current; typical values.

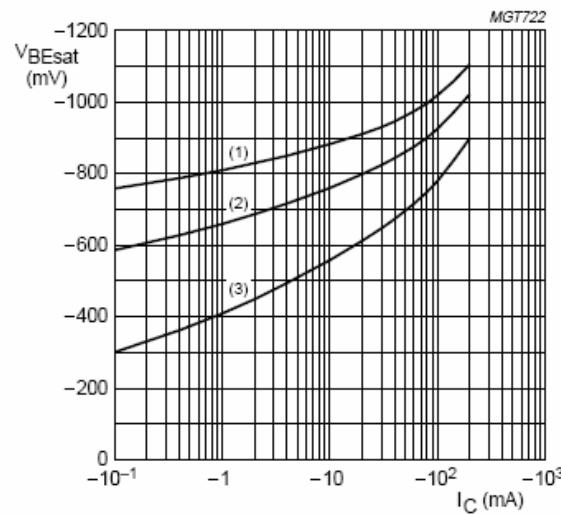

BC857C; $I_C/I_B = 20$.

- (1) $T_{amb} = -55$ °C.
- (2) $T_{amb} = 25$ °C.
- (3) $T_{amb} = 150$ °C.

Fig.12 Base-emitter saturation voltage as a function of collector current; typical values

Device	Package	Shipping
BC856/857/858	SOT-23	3000/Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by LGE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)