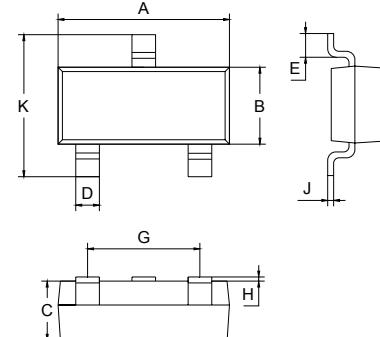


FEATURES

- High breakdown voltage.
- Complementary PNP type available (MMBTA55/MMBTA56).
- Low collector-emitter saturation voltage.

APPLICATIONS

- Ideal for medium power amplification and switching.



SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	1.0 Typical	
D	0.4 Typical	
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.1 Typical	
K	2.20	2.60

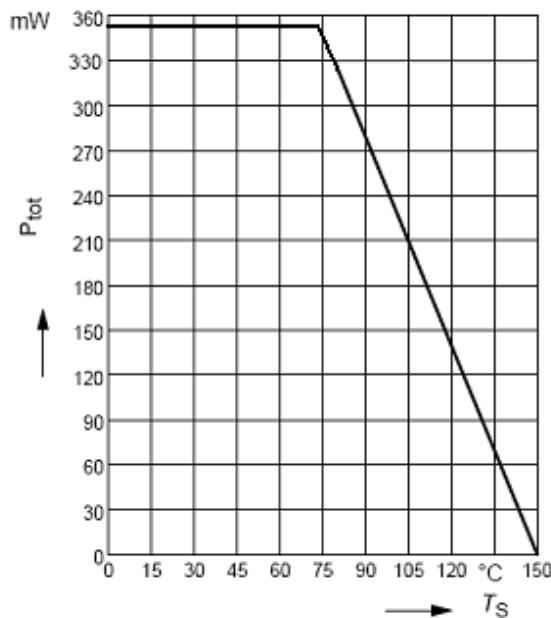
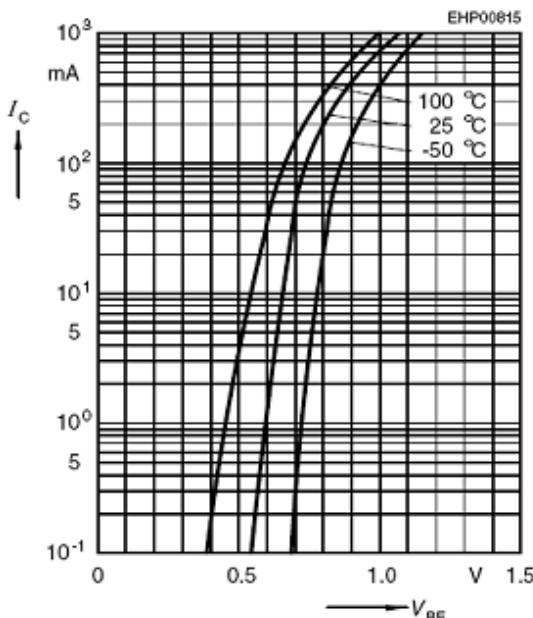
All Dimensions in mm

MAXIMUM RATING @ $T_a=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Value	UNIT
V_{CBO}	collector-base voltage MMBTA05	60	V
	MMBTA06	80	
V_{CEO}	collector-emitter voltage MMBTA05	60	V
	MMBTA06	80	
V_{EBO}	emitter-base voltage	4	V
I_C	collector current (DC)	0.5	A
P_C	Collector dissipation	350	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	357	°C/W
T_j, T_{stg}	junction and storage temperature	-55 to +150	°C

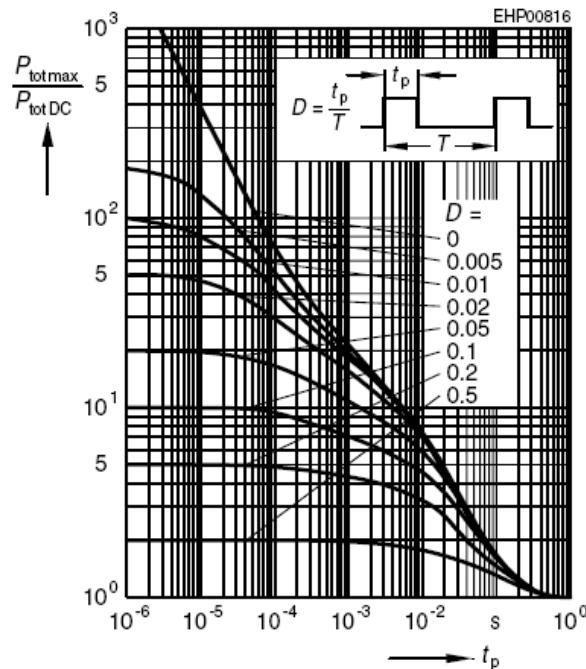
ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Symbol	Parameter	Test conditions	MIN.	MAX.	UNIT
V _{(BR)CBO}	Collector-base breakdown voltage MMBTA05 MMBTA06	I _C =100µA,I _E =0	60 80		V
V _{(BR)CEO}	Collector-emitter breakdown voltage MMBTA05 MMBTA06	I _C =1.0mA,I _B =0	60 80		V
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =10µA,I _C =0	4		V
I _{CBO}	Collector cut-off current MMBTA05 MMBTA06	I _E = 0; V _{CB} = 60V I _E = 0; V _{CB} = 80V	-	0.1	µA
I _{CEO}	Collector cut-off current MMBTA05 MMBTA06	I _B = 0; V _{CE} = 60V I _B = 0; V _{CE} = 60V	-	0.1	µA
h _{FE}	DC current gain	V _{CE} = 1V; I _C = 10mA V _{CE} = 1V; I _C = 100mA	100 100	-	
V _{CE(sat)}	Collector-emitter saturation voltage	I _C = 100mA; I _B = 10mA	-	0.25	V
V _{BE(ON)}	Base-emitter voltage	I _C =100mA,V _{CE} =1.0V	-	1.2	V
f _T	Transition frequency	I _C = 20mA; V _{CE} = 5V; f = 20MHz	100	-	MHz

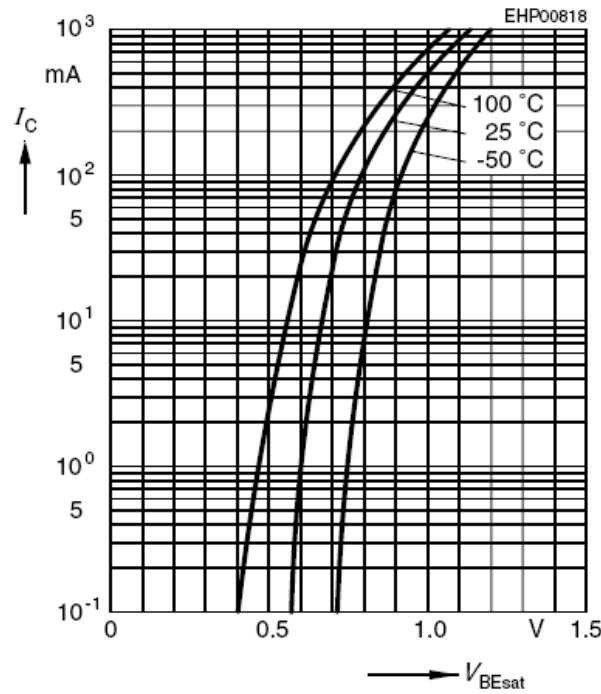
TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified
Total power dissipation $P_{\text{tot}} = f(T_S)$

Collector current $I_C = f(V_{BE})$
 $V_{CE} = 1V$


Permissible pulse load

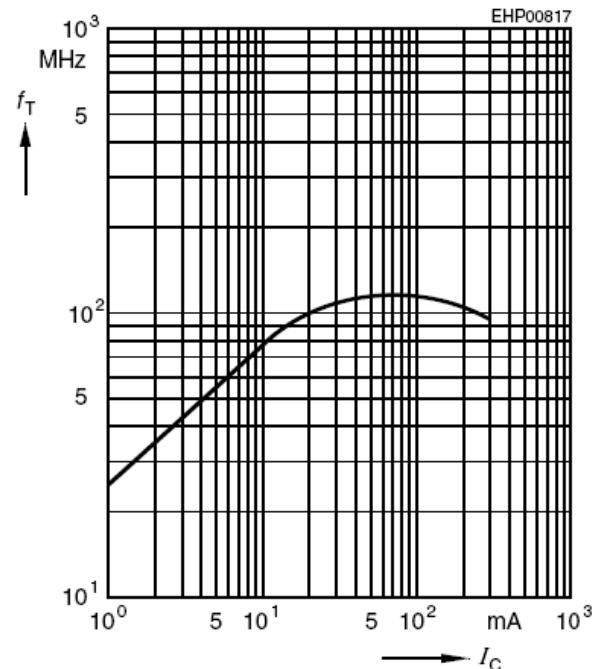
$$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$$


Base-emitter saturation voltage

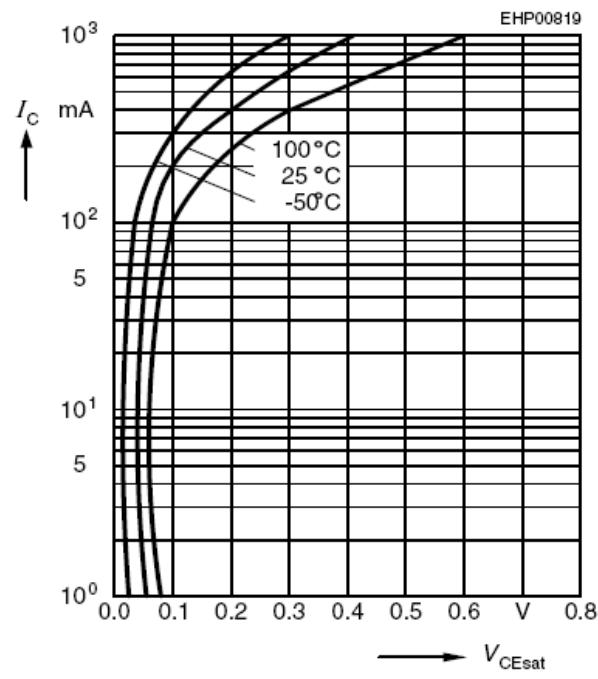
$$I_C = f(V_{BE\text{sat}}), h_{FE} = 10$$


Transition frequency $f_T = f(I_C)$

$$V_{CE} = 5V$$

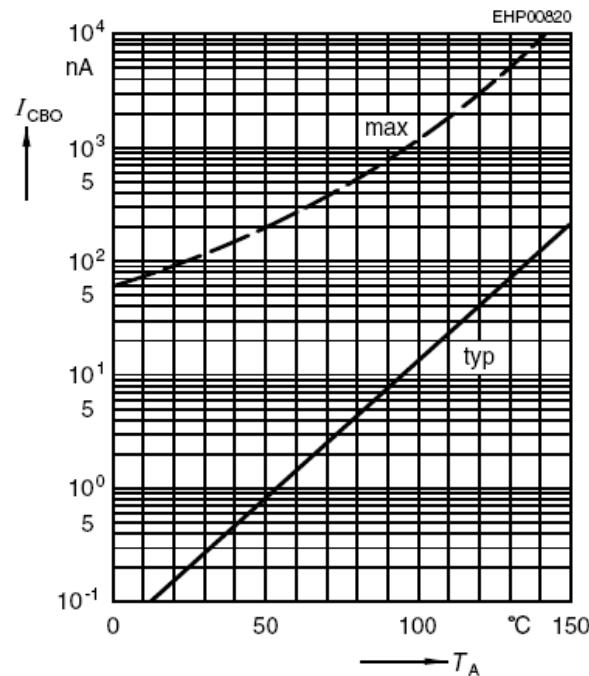

Collector-emitter saturation voltage

$$I_C = f(V_{CE\text{sat}}), h_{FE} = 10$$



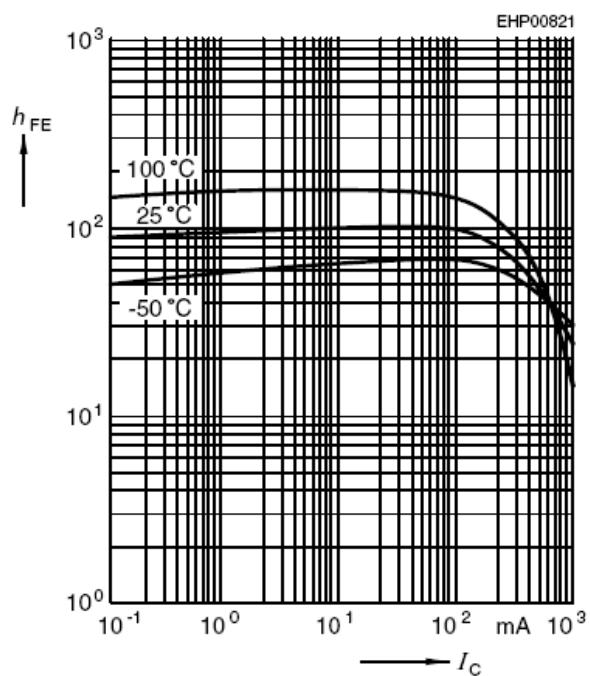
Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 80V$



DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 1V$



Device	Package	Shipping
MMBTA05/MMBTA06	SOT-23	3000/Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by LGE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)