

This 'shield' allows Arduino™ boards to communicate wirelessly using proprietary LPRS 'easyRadio' technology operating in the 433MHz or 868/915MHz (Industrial Scientific & Medical (ISM) bands.

The essence of these devices is 'easy'. Host Arduino™ boards can send and receive (half duplex) up to 250 Bytes of data per packet that will be seamlessly delivered and presented to all other hosts within range. There is no need for any complicated 'bit balancing' or elaborate coding schemes. 'Easy': Data In and Data Out !

These devices provide considerably greater range (typically 200m) and less power consumption than similar WiFi or Bluetooth dongles operating in the overcrowded 2.4GHz bands.

Frequency, bandwidth, power output and data rate can (optionally) be configured to allow multiple devices to communicate free from interference from each other and any other RF devices.

Features	Benefits
LPRS easyRadio RF Transceiver technology	Bi-directional link, no 'RF protocol' software required
Transmit, Receive, Busy and Power LEDs	Diagnostics
Integral SMA Antenna connector	Allows use of extension cable for optimal antenna position in product
Configurable RF parameters (optional)	Fine tune for optimum performance
Up to 250 Bytes per packet	Ideal for 'Sense & Control' applications
Built-in Temperature Sensor	Usable by host program

Addressing and implementation of networking (point to point, peer to peer, mesh) can be handled by Arduino™ application software thus providing flexibility and simplicity.

An optional on-board 4 pin header allows connection of an external FT232 USB adapter device to configure the easyRadio module should need be.

Specifications


Supply: +5V ± 5%, Temperature 20°C

Parameter	Min	Typical /Default	Max	Units	Notes
Supply Voltage		5V		Volts	Powered by host Arduino™
Supply Current		25		mA	Receive (Idle state)
		35		mA	Transmit
Data Rate	2.4	19.2	115.2	Kbps	Configurable - See Note 1 below
Packet Size	1		250	Bytes	Auto detect end of packet
Frequency (Default)		434		MHz	Configurable
		868		MHz	Version
		915		MHz	Version
Receive Sensitivity		-107	-117	dBm	Configurable
RF Output Power	-5	+9	+10	dBm	Configurable
Antenna		50		Ω	Via SMA Connector
Range		200		m	Dependant on conditions/terrain
Operating Temperature	-40	20	85	°C	
Mechanical					
Size	68 x 52 x 10			mm	Excluding connectors & antenna
Weight	24			g	Without antenna

Notes

- Parameters can be configured using 'easyRadio Companion' software available from: www.lprs.co.uk
- Please read this datasheet in conjunction with the easyRadio eRIC datasheet available from: www.lprs.co.uk
- The board is supplied with either an eRIC4 or eRIC9 module fitted together with a matching 434MHz or 868/915 MHz antenna.

Jumper Pin Configuration

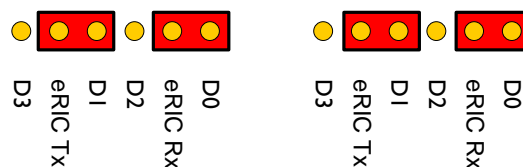

Hardware Serial:
Connects eRIC to Arduino hardware serial port (UART) on D0 and D1

Software Serial:
Connects eRIC to Arduino software serial port on D2 and D3

Other Serial: Alternatively remove the shorting jumpers and use male to female jumper wires. Connect the female ends of jumper wires to eRIC Rx and Tx pins and connect the male end to corresponding/preferred serial-enabled pins on Arduino™.

Frequency Select

When the two solder pads labelled 'FRQ' are bridged (solder blob) they enable operation of eRIC9 modules on the US 915MHz frequency band and restrict operation to meet FCC (USA) requirements.

Product includes: eRIC400/900 RF Transceiver & matching antenna.

2 x 6-pin Stackable Headers, 2 x 8-pin Stackable Headers and 4-pin to pin Header

Requires an Arduino™ board (not included)

External USB to UART adapter for optional on-board configuration of easyRadio.

Acknowledgements

Arduino™ is a trademark of the Arduino team: <http://www.arduino.cc/>

The shield design is 'Open Hardware' designed and published by Rick Winscot. Details: www.quilix.com/radius

Product Order Codes

Name	Description	Frequency	Order Code
eRIC400 Arduino	UK/European Transceiver Module (Can Marked '4')	433MHz	eRIC-Duino
eRIC900 Arduino	Europe/US Transceiver Module (Can Marked '9')	868/915MHz	eRIC-Duino
Antenna	UK & Europe	433MHz	ANTSR433
Antenna	Europe & USA	868/915MHz	ANTST900

Document History

Issue	Date	Notes/Comments
VI.0	May 2015	This version

Copyright

The information contained in this data sheet is the property of Low Power Radio Solutions Ltd and copyright is vested in them with all rights reserved. Under copyright law this documentation may not be copied, photocopied, reproduced, translated or reduced to any electronic medium or machine readable form in whole or in part without the written consent of Low Power Radio Solutions Ltd. The circuitry and design of the modules are also protected by copyright law.

Disclaimer

Low Power Radio Solutions Ltd has an on-going policy to improve the performance and reliability of their products; we therefore reserve the right to make changes without notice. The information contained in this data sheet is believed to be accurate however we do not assume any responsibility for errors or any liability arising from the application or use of any product or circuit described herein. This data sheet neither states nor implies warranty of any kind, including fitness for any particular application.

easyRadio modules are a component part of an end system product and should be treated as such. Testing to fitness is the sole responsibility of the manufacturer of the device into which easyRadio products are fitted, and is expected BEFORE deployment into the field.

Any liability from defect or malfunction is limited to the replacement of product ONLY, and does not include labour or other incurred corrective expenses.

Using or continuing to use these devices hereby binds the user to these terms

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Daughter Cards & OEM Boards](#) category:

Click to view products by [LPRS](#) manufacturer:

Other Similar products are found below :

[ADZS-21262-1-EZEXT](#) [27911](#) [MPC5777C-416DS](#) [KITMPC5744DBEVM](#) [SPC56ELADPT144S](#) [TMDXRM46CNCD](#) [DM160216](#) [EV-ADUCM350GPIOTHZ](#) [EV-ADUCM350-BIO3Z](#) [ATSTK521](#) [1130](#) [MA160015](#) [MA240013](#) [MA240026](#) [MA320014](#) [MA330014](#) [MA330017](#) [TMDSCNCD28054MISO](#) [MIKROE-2152](#) [MIKROE-2154](#) [MIKROE-2381](#) [TSSOP20EV](#) [MIKROE-1108](#) [MIKROE-1516](#) [SPS-READER-GEVK](#) [AC244049](#) [AC244050](#) [AC320004-3](#) [2077](#) [ATSMARTCARD-XPRO](#) [EIC - Q600 -230](#) [ATZB-212B-XPRO](#) [SPC560PADPT100S](#) [SPC560BADPT64S](#) [MA180018](#) [EIC - Q600 -220](#) [AC164134-1](#) [BOB-12035](#) [STM8/128-D/RAIS](#) [AC164127-6](#) [AC164127-4](#) [AC164134-3](#) [AC164156](#) [MA320021](#) [MA320024](#) [DFR0285](#) [DFR0312](#) [DFR0356](#) [MA320023](#) [MIKROE-2564](#)