

FEATURES


- Provides a simple, low-cost interface to an RS232C COM Port for reading and writing *i*Button™ devices (DS9097E required for programming DS198x Add-Only *i*Buttons)
 - Adapter is powered entirely from an RS232 interface (DS9097E may require optional auxiliary 12V supply)
 - Standard DB-9 (DS9097) or DB-25 (DS9097E) female connector for mating the adapter to the COM Port of a computer and RJ-11 connector for easy attachment of a probe such as the DS9092GT
 - DS9097E has an additional 2.1 mm male power jack to allow for an auxiliary 12V DC supply for programming Add-Only *i*Buttons
- Pin assignment DS9097, DB-9**
TXD (3), RXD (2), DTR (4), PC-Ground (5); all other pins not connected
- Pin assignment DS9097E, DB-25**
TXD (2), RXD (3), DTR (20), RTS (4), PC-Ground (7); all other pins not connected

Auxiliary supply should be a regulated 12V @ 10 mA minimum, center=GND, outer ring=V+ (Newark Electronics Stock No. 84F2081, Allied Electronics Stock No. 928-9895, Stancor Model STA-300R, or equivalent)

DESCRIPTION

The DS9097 COM Port Adapter is a simple, low-cost passive adapter which performs RS232C ($\pm 12V$) level conversion, allowing an *i*Button probe to be connected to the serial port of a computer so that a non-EPROM *i*Button can be read and written directly. It can also read all EPROM-based *i*Buttons. The serial port must support a data transmission rate of 115.2 kbits/s in order to create the 1-Wire™ time slots correctly. Nearly all PCs support the required data rate and are fully compatible with the DS9097. Since an 8-bit character (6 data bits plus start and stop bit) on the RS232 port operating at 115.2 kbits/s is used to form a single 1-Wire time slot, the maximum effective 1-Wire transfer rate is 14.4 kbits/s (regular speed). Details on the operation of the DS9097 are found in Application Note 214, Using a UART to Implement a 1-Wire Bus Master.

*i*Button is a trademark of Maxim Integrated Products, Inc.

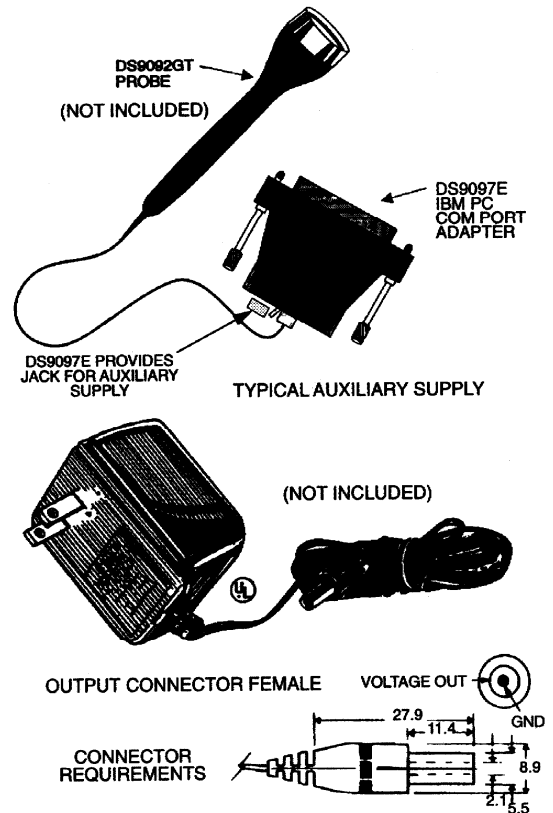

All dimensions are in millimeters.

ORDERING INFORMATION

DS9097# DB-9 Version
 DS9097E# DB-25 Version, EPROM upgraded
 # Denotes an RoHS-compliant device that may include lead(Pb) that is exempt under the RoHS requirements.

The DS9097E is an upgraded version of the DS9097 that is capable of supplying the 12 volts necessary to program the EPROM-based *i*Button products (DS198x Add-Only *i*Buttons) in addition to reading and writing SRAM and EEPROM-based devices (DS199x, DS196x, DS197x). When combined with the appropriate software, the DS9097E can be used in a standalone mode where all of the programming current is supplied by the serial port itself. In this configuration, the maximum number of EPROM bits that can be programmed simultaneously is four on a typical serial port. For higher performance, the above mentioned 12V auxiliary supply can be plugged into the power jack on the DS9097E and with proper software enable the serial port to program up to eight EPROM bits simultaneously.

REVISION HISTORY

| REVISION DATE | DESCRIPTION | PAGES CHANGED |
|--------------------------|---|--------------------------|
| 8/09 | <ul style="list-style-type: none">• Added an <i>Ordering Information</i> table.• Changed the reference to Application Note 74 to Application Note 214 in the <i>Description</i> section. | 1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [iButtons & Accessories](#) category:

Click to view products by [Maxim](#) manufacturer:

Other Similar products are found below :

[DS9094F+](#) [DS9092+](#) [DS9092L+](#) [DS9093A+](#) [DS9093AB+](#) [DS9093AG+](#) [DS9093AY+](#) [DS9093S+](#) [DS9094FS+](#) [DS9098P-TRL+](#) [DS9100-](#)
[B+](#) [DS9100-C+](#) [DS9106L-0G0+](#) [DS9106L-GN0](#) [DS9093AR+](#) [DS9105-00C#](#)