

## CD TYPE

### FEATURES 特性

Various high power inductors are superior be high saturation for surface mounting.  
 具有高功率、高饱和电流、低阻抗、小型化之特点。

### APPLICATIONS 用途

Power supply for VTR,OA equipment Digital camera,LCD television set notebook PC,  
 portable communication equipments,DC/DC converters,etc.  
 录影机，OA仪器，数码相机，液晶电视，笔记型电脑，小型通信机器，DC/DC变压器  
 之电源供应器等。

### DIMENSIONS 尺寸



| PART NO. | A       | B       | C        | D(Ref) |
|----------|---------|---------|----------|--------|
| XRCD32   | 3.0±0.3 | 2.1±0.3 | 3.5±0.3  | 1.0    |
| XRCD43   | 4.0±0.3 | 3.2±0.3 | 4.5±0.3  | 1.4    |
| XRCD52   | 5.2±0.3 | 2.1±0.3 | 5.8±0.3  | 1.6    |
| XRCD53   | 5.2±0.3 | 3.2±0.3 | 5.8±0.3  | 1.6    |
| XRCD54   | 5.2±0.3 | 4.5±0.3 | 5.8±0.3  | 1.6    |
| XRCD73   | 7.0±0.3 | 3.5±0.4 | 7.8±0.3  | 2.4    |
| XRCD75   | 7.0±0.3 | 5.0±0.4 | 7.8±0.3  | 2.4    |
| XRCD104  | 9.0±0.3 | 4.0±0.5 | 10.0±0.3 | 3.1    |
| XRCD105  | 9.0±0.3 | 5.4±0.5 | 10.0±0.3 | 3.1    |
| XRCD106  | 9.0±0.3 | 6.6±0.5 | 10.0±0.3 | 3.1    |

### IDENTIFICATION 产品标记说明

105      470      K      I  
XRCD  
 1      2      3      4      5

1. product ID 产品代号
2. Dimensions 尺寸
3. Inductance 电感量 (470:47uH,471:470uH)
4. Tolerance 精度 (J:±5%,K:±10%,L:±15% M:±20%,P:±25%,N:±30%)
5. Packaging Style 包装 (T:Tape and reel;B:Bulk)

**SPECIFICATION TABLE:**
**XRCD32 TYPE**

| PART NUMBER<br>品名 | INDUCTANCE<br>E (μH)<br>电感值 | DCR (max)<br>(Ω)<br>直流电阻 | IDC (A)(max)<br>ΔL/L=-10%;Δt=40℃<br>定格电流 | TEST FREQ.<br>测试频率 |
|-------------------|-----------------------------|--------------------------|--|--------------------|
| XRCD32-100K       | 10                          | 0.23                     | 0.760                                    | 100KHz             |
| XRCD32-120K       | 12                          | 0.27                     | 0.685                                    | 100KHz             |
| XRCD32-150K       | 15                          | 0.31                     | 0.635                                    | 100KHz             |
| XRCD32-180K       | 18                          | 0.41                     | 0.525                                    | 100KHz             |
| XRCD32-220K       | 22                          | 0.47                     | 0.500                                    | 100KHz             |
| XRCD32-270K       | 27                          | 0.66                     | 0.405                                    | 100KHz             |
| XRCD32-330K       | 33                          | 0.76                     | 0.380                                    | 100KHz             |
| XRCD32-390K       | 39                          | 0.85                     | 0.355                                    | 100KHz             |
| XRCD32-470K       | 47                          | 0.97                     | 0.330                                    | 100KHz             |
| XRCD32-560K       | 56                          | 1.25                     | 0.290                                    | 100KHz             |
| XRCD32-680K       | 68                          | 1.45                     | 0.275                                    | 100KHz             |
| XRCD32-820K       | 82                          | 1.85                     | 0.235                                    | 100KHz             |
| XRCD32-101K       | 100                         | 2.20                     | 0.220                                    | 100KHz             |
| XRCD32-121K       | 120                         | 2.90                     | 0.185                                    | 100KHz             |
| XRCD32-151K       | 150                         | 3.40                     | 0.170                                    | 100KHz             |
| XRCD32-181K       | 180                         | 3.90                     | 0.165                                    | 100KHz             |
| XRCD32-221K       | 220                         | 4.50                     | 0.155                                    | 100KHz             |
| XRCD32-271K       | 270                         | 6.00                     | 0.135                                    | 100KHz             |
| XRCD32-331K       | 330                         | 7.00                     | 0.125                                    | 100KHz             |
| XRCD32-391K       | 390                         | 7.80                     | 0.115                                    | 100KHz             |

## XRCD43 TYPE

| PART NUMBER<br>品名 | INDUCTANC E (μH)<br>电感值 | DCR (max) (Ω)<br>直流电阻 | IDC (A)(max)<br>ΔL/L=-10%;Δt=40℃<br>定格电流 | TEST FREQ.<br>测试频率 |
|-------------------|-------------------------|-----------------------|--|--------------------|
| XRCD43-1R0M       | 1.0                     | 0.033                 | 3.80                                     | 7.96MHz            |
| XRCD43-1R5M       | 1.5                     | 0.038                 | 3.30                                     | 7.96MHz            |
| XRCD43-1R8M       | 1.8                     | 0.042                 | 2.91                                     | 7.96MHz            |
| XRCD43-2R2M       | 2.2                     | 0.047                 | 2.60                                     | 7.96MHz            |
| XRCD43-2R7M       | 2.7                     | 0.052                 | 2.43                                     | 7.96MHz            |
| XRCD43-3R3M       | 3.3                     | 0.058                 | 2.15                                     | 7.96MHz            |
| XRCD43-3R9M       | 3.9                     | 0.076                 | 1.98                                     | 7.96MHz            |
| XRCD43-4R7M       | 4.7                     | 0.094                 | 1.70                                     | 7.96MHz            |
| XRCD43-5R6M       | 5.6                     | 0.101                 | 1.60                                     | 7.96MHz            |
| XRCD43-6R8M       | 6.8                     | 0.117                 | 1.40                                     | 7.96MHz            |
| XRCD43-8R2M       | 8.2                     | 0.132                 | 1.26                                     | 7.96MHz            |
| XRCD43-100M       | 10                      | 0.182                 | 1.15                                     | 2.25MHz            |
| XRCD43-120M       | 12                      | 0.210                 | 1.05                                     | 2.25MHz            |
| XRCD43-150M       | 15                      | 0.235                 | 0.92                                     | 2.25MHz            |
| XRCD43-180M       | 18                      | 0.338                 | 0.84                                     | 2.25MHz            |
| XRCD43-220M       | 22                      | 0.378                 | 0.76                                     | 2.25MHz            |
| XRCD43-270M       | 27                      | 0.522                 | 0.71                                     | 2.25MHz            |
| XRCD43-330M       | 33                      | 0.540                 | 0.64                                     | 2.25MHz            |
| XRCD43-390M       | 39                      | 0.587                 | 0.59                                     | 2.25MHz            |
| XRCD43-470M       | 47                      | 0.844                 | 0.54                                     | 2.25MHz            |
| XRCD43-560M       | 56                      | 0.937                 | 0.50                                     | 2.25MHz            |
| XRCD43-680M       | 68                      | 1.17                  | 0.46                                     | 2.25MHz            |
| XRCD43-820M       | 82                      | 1.20                  | 0.48                                     | 2.25MHz            |
| XRCD43-121M       | 120                     | 1.04                  | 0.30                                     | 1KHz               |
| XRCD43-152K       | 1500                    | 15.00                 | 0.05                                     | 1KHz               |
| XRCD43-182K       | 1800                    | 16.00                 | 0.04                                     | 1KHz               |

## XRCD52TYPE

| PART NUMBER<br>品名 | INDUCTANC E (μH)<br>电感值 | DCR (max) (Ω)<br>直流电阻 | IDC (A)(max)<br>ΔL/L=-10%;Δt=40℃<br>定格电流 | TEST FREQ.<br>测试频率 |
|-------------------|-------------------------|-----------------------|--|--------------------|
| XRCD52-2R2M       | 2.2                     | 0.039                 | 2.16                                     | 7.96MHz            |
| XRCD52-2R7M       | 2.7                     | 0.044                 | 2.08                                     | 7.96MHz            |
| XRCD52-3R3M       | 3.3                     | 0.049                 | 1.90                                     | 7.96MHz            |
| XRCD52-3R9M       | 3.9                     | 0.056                 | 1.84                                     | 7.96MHz            |
| XRCD52-4R7M       | 4.7                     | 0.062                 | 1.60                                     | 7.96MHz            |
| XRCD52-5R6M       | 5.6                     | 0.078                 | 1.44                                     | 7.96MHz            |
| XRCD52-6R8M       | 6.8                     | 0.091                 | 1.36                                     | 7.96MHz            |
| XRCD52-8R2M       | 8.2                     | 0.103                 | 1.12                                     | 7.96MHz            |
| XRCD52-100K       | 10                      | 0.133                 | 1.04                                     | 2.52MHz            |
| XRCD52-120K       | 12                      | 0.148                 | 0.96                                     | 2.52MHz            |
| XRCD52-150K       | 15                      | 0.166                 | 0.88                                     | 2.52MHz            |
| XRCD52-180K       | 18                      | 0.213                 | 0.77                                     | 2.52MHz            |
| XRCD52-220K       | 22                      | 0.248                 | 0.73                                     | 2.52MHz            |
| XRCD52-270K       | 27                      | 0.328                 | 0.64                                     | 2.52MHz            |
| XRCD52-330K       | 33                      | 0.378                 | 0.58                                     | 2.52MHz            |
| XRCD52-390K       | 39                      | 0.438                 | 0.54                                     | 2.52MHz            |
| XRCD52-470K       | 47                      | 0.546                 | 0.49                                     | 2.52MHz            |
| XRCD52-560K       | 56                      | 0.621                 | 0.45                                     | 2.52MHz            |
| XRCD52-680K       | 68                      | 0.715                 | 0.41                                     | 2.52MHz            |
| XRCD52-820K       | 82                      | 1.00                  | 0.35                                     | 2.52MHz            |
| XRCD52-101K       | 100                     | 1.07                  | 0.35                                     | 1KHz               |
| XRCD52-121K       | 120                     | 1.25                  | 0.32                                     | 1KHz               |
| XRCD52-151K       | 150                     | 1.66                  | 0.26                                     | 1KHz               |
| XRCD52-181K       | 180                     | 1.90                  | 0.23                                     | 1KHz               |
| XRCD52-221K       | 220                     | 2.44                  | 0.21                                     | 1KHz               |
| XRCD52-271K       | 270                     | 2.73                  | 0.19                                     | 1KHz               |

### XRCD53 TYPE

| PART NUMBER<br>品名 | INDUCTANCE<br>( $\mu$ H)<br>电感值 | DCR (max)<br>( $\Omega$ )<br>直流电阻 | IDC (A)(max)<br>$\Delta L/L=-10\%;\Delta t=40^{\circ}\text{C}$<br>定格电流 | TEST FREQ.<br>测试频率 |
|-------------------|---------------------------------|-----------------------------------|--|--------------------|
| XRCD53-1R0M       | 1.0                             | 0.03                              | 4.50   | 7.96MHz            |
| XRCD53-1R2M       | 1.2                             | 0.03                              | 4.20   | 7.96MHz            |
| XRCD53-1R5M       | 1.5                             | 0.03                              | 4.10   | 7.96MHz            |
| XRCD53-1R8M       | 1.8                             | 0.03                              | 3.70   | 7.96MHz            |
| XRCD53-2R2M       | 2.2                             | 0.03                              | 3.50   | 7.96MHz            |
| XRCD53-2R7M       | 2.7                             | 0.04                              | 3.20   | 7.96MHz            |
| XRCD53-3R3M       | 3.3                             | 0.05                              | 2.80   | 7.96MHz            |
| XRCD53-3R9M       | 3.9                             | 0.06                              | 2.60   | 7.96MHz            |
| XRCD53-4R7M       | 4.7                             | 0.07                              | 2.50   | 7.96MHz            |
| XRCD53-5R6M       | 5.6                             | 0.08                              | 2.40   | 7.96MHz            |
| XRCD53-6R8M       | 6.8                             | 0.09                              | 2.20   | 7.96MHz            |
| XRCD53-8R2M       | 8.2                             | 0.10                              | 2.00   | 7.96MHz            |
| XRCD53-100K       | 10                              | 0.12                              | 1.80   | 2.52MHz            |
| XRCD53-120K       | 12                              | 0.13                              | 1.75   | 2.52MHz            |
| XRCD53-150K       | 15                              | 0.15                              | 1.70   | 2.52MHz            |
| XRCD53-180K       | 18                              | 0.18                              | 1.60   | 2.52MHz            |
| XRCD53-220K       | 22                              | 0.22                              | 1.50   | 2.52MHz            |
| XRCD53-270K       | 27                              | 0.24                              | 1.40   | 2.52MHz            |
| XRCD53-330K       | 33                              | 0.30                              | 1.10   | 2.52MHz            |
| XRCD53-390K       | 39                              | 0.40                              | 1.00   | 2.52MHz            |
| XRCD53-470K       | 47                              | 0.43                              | 0.90   | 2.52MHz            |
| XRCD53-560K       | 56                              | 0.50                              | 0.85   | 2.52MHz            |
| XRCD53-680K       | 68                              | 0.60                              | 0.80   | 2.52MHz            |
| XRCD53-820K       | 82                              | 0.80                              | 0.65   | 2.52MHz            |
| XRCD53-101K       | 100                             | 0.90                              | 0.60   | 1KHz               |
| XRCD53-121K       | 120                             | 1.00                              | 0.58   | 1KHz               |
| XRCD53-151K       | 150                             | 1.30                              | 0.43   | 1KHz               |
| XRCD53-181K       | 180                             | 1.50                              | 0.41   | 1KHz               |
| XRCD53-221K       | 220                             | 2.00                              | 0.38   | 1KHz               |
| XRCD53-271K       | 270                             | 2.50                              | 0.35   | 1KHz               |
| XRCD53-331K       | 330                             | 3.20                              | 0.28   | 1KHz               |
| XRCD53-391K       | 390                             | 3.50                              | 0.26   | 1KHz               |
| XRCD53-471K       | 470                             | 4.20                              | 0.20   | 1KHz               |
| XRCD53-561K       | 560                             | 4.50                              | 0.19   | 1KHz               |
| XRCD53-681K       | 680                             | 6.00                              | 0.18   | 1KHz               |
| XRCD53-821K       | 820                             | 6.50                              | 0.15   | 1KHz               |
| XRCD53-102K       | 1000                            | 8.00                              | 0.13   | 1KHz               |

### XRCD54 TYPE

| PART NUMBER<br>品名 | INDUCTANCE<br>( $\mu$ H)<br>电感值 | DCR (max)<br>( $\Omega$ )<br>直流电阻 | IDC (A)(max)<br>$\Delta L/L=-10\%;\Delta t=40^{\circ}\text{C}$<br>定格电流 | TEST FREQ.<br>测试频率 |
|-------------------|---------------------------------|-----------------------------------|--|--------------------|
| XRCD54-1R0M       | 1.0                             | 0.015                             | 5.90   | 7.96MHz            |
| XRCD54-1R2M       | 1.2                             | 0.020                             | 5.20   | 7.96MHz            |
| XRCD54-1R5M       | 1.5                             | 0.025                             | 4.70   | 7.96MHz            |
| XRCD54-1R8M       | 1.8                             | 0.030                             | 4.00   | 7.96MHz            |
| XRCD54-2R2M       | 2.2                             | 0.035                             | 3.80   | 7.96MHz            |
| XRCD54-2R7M       | 2.7                             | 0.040                             | 3.40   | 7.96MHz            |
| XRCD54-3R3M       | 3.3                             | 0.045                             | 3.30   | 7.96MHz            |
| XRCD54-3R9M       | 3.9                             | 0.050                             | 2.90   | 7.96MHz            |
| XRCD54-4R7M       | 4.7                             | 0.060                             | 2.80   | 7.96MHz            |
| XRCD54-5R6M       | 5.6                             | 0.070                             | 2.40   | 7.96MHz            |
| XRCD54-6R8M       | 6.8                             | 0.080                             | 2.10   | 7.96MHz            |
| XRCD54-8R2M       | 8.2                             | 0.090                             | 2.00   | 7.96MHz            |
| XRCD54-100M       | 10                              | 0.10                              | 1.44   | 2.52MHz            |
| XRCD54-120M       | 12                              | 0.12                              | 1.40   | 2.52MHz            |
| XRCD54-150M       | 15                              | 0.14                              | 1.30   | 2.52MHz            |
| XRCD54-180M       | 18                              | 0.15                              | 1.23   | 2.52MHz            |
| XRCD54-220M       | 22                              | 0.18                              | 1.11   | 2.52MHz            |
| XRCD54-270M       | 27                              | 0.20                              | 0.97   | 2.52MHz            |
| XRCD54-330L       | 33                              | 0.23                              | 0.88   | 2.52MHz            |
| XRCD54-390L       | 39                              | 0.32                              | 0.80   | 2.52MHz            |
| XRCD54-470L       | 47                              | 0.37                              | 0.72   | 2.52MHz            |
| XRCD54-560K       | 56                              | 0.42                              | 0.68   | 2.52MHz            |
| XRCD54-680K       | 68                              | 0.46                              | 0.61   | 2.52MHz            |
| XRCD54-820K       | 82                              | 0.60                              | 0.58   | 2.52MHz            |
| XRCD54-101K       | 100                             | 0.70                              | 0.52   | 1KHz               |
| XRCD54-121K       | 120                             | 0.93                              | 0.48   | 1KHz               |
| XRCD54-151K       | 150                             | 1.10                              | 0.40   | 1KHz               |
| XRCD54-181K       | 180                             | 1.38                              | 0.38   | 1KHz               |
| XRCD54-221K       | 220                             | 1.57                              | 0.35   | 1KHz               |
| XRCD54-271K       | 270                             | 1.65                              | 0.32   | 1KHz               |
| XRCD54-331K       | 330                             | 1.70                              | 0.28   | 1KHz               |
| XRCD54-391K       | 390                             | 1.80                              | 0.26   | 1KHz               |
| XRCD54-471K       | 470                             | 2.30                              | 0.23   | 1KHz               |
| XRCD54-561K       | 560                             | 2.50                              | 0.20   | 1KHz               |
| XRCD54-681K       | 680                             | 3.00                              | 0.19   | 1KHz               |
| XRCD54-821K       | 820                             | 4.50                              | 0.16   | 1KHz               |
| XRCD54-102K       | 1000                            | 4.80                              | 0.14   | 1KHz               |
| XRCD54-152K       | 1500                            | 6.10                              | 0.10   | 1KHz               |
| XRCD54-222K       | 2200                            | 7.40                              | 0.06   | 1KHz               |

**XRCD73 TYPE**

| PART NUMBER<br>品名 | INDUCTANCE<br>E (μH)<br>电感值 | DCR (max)<br>(Ω)<br>直流电阻 | IDC (A)(max)<br>ΔL/L=-10%;Δt=40℃<br>定格电流 | TEST FREQ.<br>测试频率 |
|-------------------|-----------------------------|--------------------------|--|--------------------|
| XRCD73-100M       | 10                          | 0.08                     | 1.44                                     | 2.52MHz            |
| XRCD73-120M       | 12                          | 0.09                     | 1.39                                     | 2.52MHz            |
| XRCD73-150M       | 15                          | 0.10                     | 1.24                                     | 2.52MHz            |
| XRCD73-180M       | 18                          | 0.11                     | 1.12                                     | 2.52MHz            |
| XRCD73-220M       | 22                          | 0.13                     | 1.07                                     | 2.52MHz            |
| XRCD73-270M       | 27                          | 0.15                     | 0.94                                     | 2.52MHz            |
| XRCD73-330L       | 33                          | 0.17                     | 0.85                                     | 2.52MHz            |
| XRCD73-390L       | 39                          | 0.22                     | 0.74                                     | 2.52MHz            |
| XRCD73-470L       | 47                          | 0.25                     | 0.68                                     | 2.52MHz            |
| XRCD73-560K       | 56                          | 0.28                     | 0.64                                     | 2.52MHz            |
| XRCD73-680K       | 68                          | 0.33                     | 0.59                                     | 2.52MHz            |
| XRCD73-820K       | 82                          | 0.41                     | 0.54                                     | 2.52MHz            |
| XRCD73-101K       | 100                         | 0.48                     | 0.51                                     | 1KHz               |
| XRCD73-121K       | 120                         | 0.54                     | 0.49                                     | 1KHz               |
| XRCD73-151K       | 150                         | 0.75                     | 0.40                                     | 1KHz               |
| XRCD73-181K       | 180                         | 1.02                     | 0.36                                     | 1KHz               |
| XRCD73-221K       | 220                         | 1.20                     | 0.31                                     | 1KHz               |
| XRCD73-271K       | 270                         | 1.31                     | 0.29                                     | 1KHz               |
| XRCD73-331K       | 330                         | 1.50                     | 0.28                                     | 1KHz               |

## XRCD75 TYPE


| PART NUMBER<br>品名 | INDUCTANCE<br>E (μH)<br>电感值 | DCR (max)<br>(Ω)<br>直流电阻 | IDC (A)(max)<br>ΔL/L=-10%;Δt=40℃<br>定格电流 | TEST FREQ.<br>测试频率 |
|-------------------|-----------------------------|--------------------------|--|--------------------|
| XRCD75-100M       | 10                          | 0.07                     | 2.30                                     | 2.52MHz            |
| XRCD75-120M       | 12                          | 0.08                     | 2.00                                     | 2.52MHz            |
| XRCD75-150M       | 15                          | 0.09                     | 1.80                                     | 2.52MHz            |
| XRCD75-180M       | 18                          | 0.10                     | 1.60                                     | 2.52MHz            |
| XRCD75-220M       | 22                          | 0.11                     | 1.50                                     | 2.52MHz            |
| XRCD75-270M       | 27                          | 0.12                     | 1.30                                     | 2.52MHz            |
| XRCD75-330M       | 33                          | 0.13                     | 1.20                                     | 2.52MHz            |
| XRCD75-390M       | 39                          | 0.16                     | 1.10                                     | 2.52MHz            |
| XRCD75-470M       | 47                          | 0.18                     | 1.10                                     | 2.52MHz            |
| XRCD75-560K       | 56                          | 0.24                     | 0.94                                     | 2.52MHz            |
| XRCD75-680K       | 68                          | 0.28                     | 0.85                                     | 2.52MHz            |
| XRCD75-820K       | 82                          | 0.37                     | 0.78                                     | 2.52MHz            |
| XRCD75-101K       | 100                         | 0.43                     | 0.72                                     | 1KHz               |
| XRCD75-121K       | 120                         | 0.47                     | 0.66                                     | 1KHz               |
| XRCD75-151K       | 150                         | 0.64                     | 0.58                                     | 1KHz               |
| XRCD75-181K       | 180                         | 0.71                     | 0.51                                     | 1KHz               |
| XRCD75-221K       | 220                         | 0.96                     | 0.49                                     | 1KHz               |
| XRCD75-271K       | 270                         | 1.11                     | 0.42                                     | 1KHz               |
| XRCD75-331K       | 330                         | 1.26                     | 0.40                                     | 1KHz               |
| XRCD75-391K       | 390                         | 1.77                     | 0.36                                     | 1KHz               |
| XRCD75-471K       | 470                         | 1.96                     | 0.34                                     | 1KHz               |
| XRCD75-561K       | 560                         | 2.90                     | 0.33                                     | 1KHz               |
| XRCD75-681K       | 680                         | 3.44                     | 0.30                                     | 1KHz               |
| XRCD75-821K       | 820                         | 4.90                     | 0.27                                     | 1KHz               |
| XRCD75-102K       | 1000                        | 5.24                     | 0.23                                     | 1KHz               |
| XRCD75-152K       | 1500                        | 6.50                     | 0.18                                     | 1KHz               |
| XRCD75-222K       | 2200                        | 7.84                     | 0.15                                     | 1KHz               |
| XRCD75-332K       | 3300                        | 8.30                     | 0.11                                     | 1KHz               |



**XRCD105 TYPE**

| PART NUMBER<br>品名 | INDUCTANCE<br>E (μH)<br>电感值 | DCR (max)<br>(Ω)<br>直流电阻 | IDC (A)(max)<br>ΔL/L=-10%;Δt=40℃<br>定格电流 | TEST FREQ.<br>测试频率 |
|-------------------|-----------------------------|--------------------------|--|--------------------|
| XRCD105-100M      | 10                          | 0.06                     | 2.60                                     | 2.52MHz            |
| XRCD105-120M      | 12                          | 0.07                     | 2.45                                     | 2.52MHz            |
| XRCD105-150M      | 15                          | 0.08                     | 2.27                                     | 2.52MHz            |
| XRCD105-180M      | 18                          | 0.09                     | 2.15                                     | 2.52MHz            |
| XRCD105-220M      | 22                          | 0.10                     | 1.95                                     | 2.52MHz            |
| XRCD105-270M      | 27                          | 0.11                     | 1.76                                     | 2.52MHz            |
| XRCD105-330L      | 33                          | 0.12                     | 1.50                                     | 2.52MHz            |
| XRCD105-390L      | 39                          | 0.14                     | 1.37                                     | 2.52MHz            |
| XRCD105-470L      | 47                          | 0.17                     | 1.28                                     | 2.52MHz            |
| XRCD105-560K      | 56                          | 0.19                     | 1.17                                     | 2.52MHz            |
| XRCD105-680K      | 68                          | 0.22                     | 1.11                                     | 2.52MHz            |
| XRCD105-820K      | 82                          | 0.25                     | 1.00                                     | 2.52MHz            |
| XRCD105-101K      | 100                         | 0.35                     | 0.97                                     | 1KHz               |
| XRCD105-121K      | 120                         | 0.40                     | 0.89                                     | 1KHz               |
| XRCD105-151K      | 150                         | 0.47                     | 0.78                                     | 1KHz               |
| XRCD105-181K      | 180                         | 0.63                     | 0.72                                     | 1KHz               |
| XRCD105-221K      | 220                         | 0.73                     | 0.66                                     | 1KHz               |
| XRCD105-271K      | 270                         | 0.97                     | 0.57                                     | 1KHz               |
| XRCD105-331K      | 330                         | 1.15                     | 0.52                                     | 1KHz               |
| XRCD105-391K      | 390                         | 1.30                     | 0.48                                     | 1KHz               |
| XRCD105-471K      | 470                         | 1.48                     | 0.42                                     | 1KHz               |
| XRCD105-561K      | 560                         | 1.90                     | 0.33                                     | 1KHz               |
| XRCD105-681K      | 680                         | 2.25                     | 0.28                                     | 1KHz               |
| XRCD105-821K      | 820                         | 2.55                     | 0.24                                     | 1KHz               |
| XRCD75-102K       | 1000                        | 3.80                     | 0.23                                     | 1KHz               |
| XRCD75-152K       | 1500                        | 6.10                     | 0.21                                     | 1KHz               |
| XRCD75-222K       | 2200                        | 7.40                     | 0.17                                     | 1KHz               |
| XRCD75-332K       | 3300                        | 7.90                     | 0.15                                     | 1KHz               |


## 包装

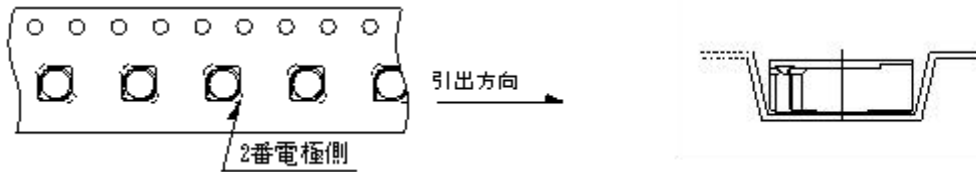

### 包装方式

|         |                      |         |
|---------|----------------------|---------|
| LEADER部 | SEAL TAPE 尺寸         | 10cm以上  |
|         | START CARRIER TAPE尺寸 | 20cm以上  |
|         | TRATLER部尺寸           | 10cm以上  |
|         | 数量                   | 1500pcs |

纸卷

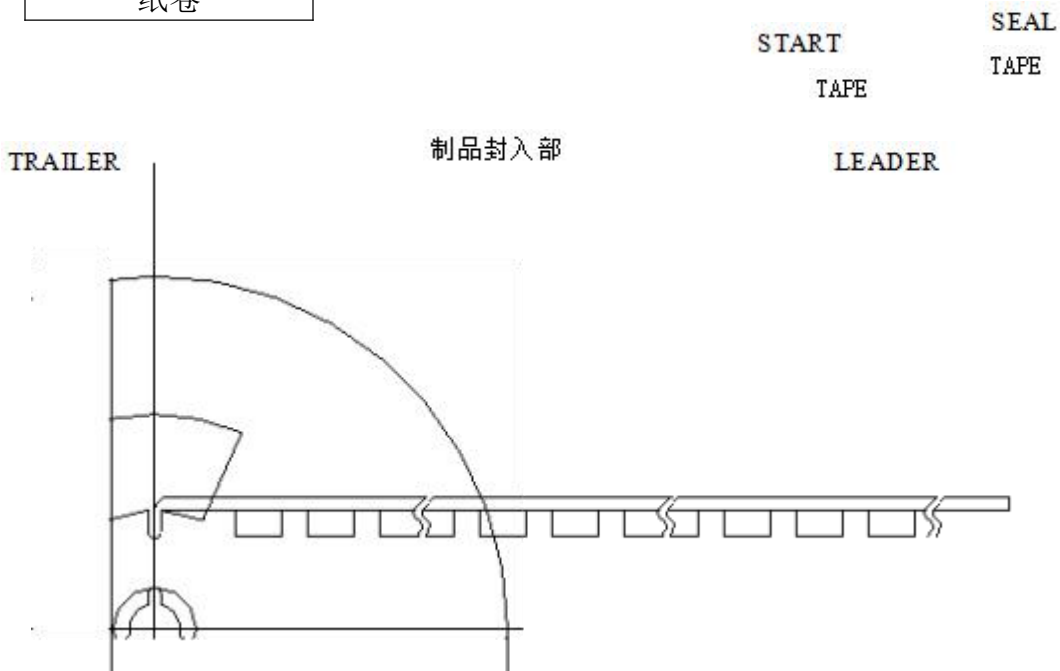

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [MaxLinear](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)  
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-](#)  
[53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-](#)  
[471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-](#)  
[4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#)  
[ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)