

# PIC24FJ128GL306 General Purpose Plug-In Module (PIM) Information Sheet

## Americas

Atlanta - 678-957-9614  
Austin - 512-257-3370  
Boston - 774-760-0087  
Chicago - 630-285-0071  
Dallas - 972-818-7423  
Detroit - 248-848-4000  
Houston - 281-894-5983  
Indianapolis - 317-773-8323  
Los Angeles - 949-462-9523  
New York - 631-435-6000  
Phoenix - 480-792-7200  
Raleigh - 919-844-7510  
San Jose - 408-735-9110  
Toronto - 905-695-1980

## Europe

Austria - Wels - 43-7242-2244-39  
Denmark - Copenhagen - 45-4450-2828  
Finland - Espoo - 358-9-4520-820  
France - Paris - 33-1-69-53-63-20  
Germany - Garching - 49-8931-9700  
Germany - Haan - 49-2129-3766400  
Germany - Heilbronn - 49-7131-72400  
Germany - Karlsruhe - 49-721-625370  
Germany - Munich - 49-89-627-144-0  
Germany - Rosenheim - 49-8031-354-560  
Israel - Ra'anana - 972-9-744-7705  
Italy - Milan - 39-0331-742611  
Italy - Padova - 39-049-7625286  
Netherlands - Drunen - 31-416-690399  
Norway - Trondheim - 47-7288-4388  
Poland - Warsaw - 48-22-3325737  
Romania - Bucharest - 40-21-407-87-50  
Spain - Madrid - 34-91-708-08-90  
Sweden - Gothenberg - 46-31-704-60-40  
Sweden - Stockholm - 46-8-5090-4654  
UK - Wokingham - 44-118-921-5800

## Asia/Pacific

Australia - Sydney - 61-2-9868-6733  
China - Beijing - 86-10-8569-7000  
China - Chengdu - 86-28-8665-5511  
China - Chongqing - 86-23-8980-9588  
China - Dongguan - 86-769-8702-9880  
China - Guangzhou - 86-20-8755-8029  
China - Hangzhou - 86-571-8792-8115  
China - Hong Kong SAR - 852-2943-5100  
China - Nanjing - 86-25-8473-2460  
China - Qingdao - 86-532-8502-7355  
China - Shanghai - 86-21-3326-8000  
China - Shenyang - 86-24-2334-2829  
China - Shenzhen - 86-755-8864-2200  
China - Suzhou - 86-186-6233-1526  
China - Wuhan - 86-27-5980-5300  
China - Xiamen - 86-592-2388138  
China - Xian - 86-29-8833-7252  
China - Zhuhai - 86-756-3210040  
India - Bangalore - 91-80-3090-4444  
India - New Delhi - 91-11-4160-8631  
India - Pune - 91-20-4121-0141  
Japan - Osaka - 81-6-6152-7160  
Japan - Tokyo - 81-3-6880-3770  
Korea - Daegu - 82-53-744-4301  
Korea - Seoul - 82-2-554-7200  
Malaysia - Kuala Lumpur - 60-3-7651-7906  
Malaysia - Penang - 60-4-227-8870  
Philippines - Manila - 63-2-634-9065  
Singapore - 65-6334-8870  
Taiwan - Hsin Chu - 886-3-577-8366  
Taiwan - Kaohsiung - 886-7-213-7830  
Taiwan - Taipei - 886-2-2508-8600  
Thailand - Bangkok - 66-2-694-1351  
Vietnam - Ho Chi Minh - 84-28-5448-2100

## Overview

The PIC24FJ128GL306 General Purpose Plug-In Module (MA240040) is designed to demonstrate the capabilities of the PIC24FJ128GL306 family, including the LCD controller, using the Explorer 16/32 Development Board. Refer to [Table 1](#) and [Table 2](#) for the mapping of the physical pins on the PIC24FJ128GL306 to the 100-pin PIM connector.

Not all predefined PIM signals found on the Explorer 16/32 are connected due to the limited number of I/O pins available.

5/14/19



Microchip Technology Inc. • 2355 West Chandler Blvd. • Chandler, AZ 85224-6199

[www.microchip.com](http://www.microchip.com)

The Microchip name and logo, the Microchip logo and PIC are registered trademarks of Microchip Technology Inc. in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies. © 2019, Microchip Technology Incorporated, Printed in the U.S.A. All Rights Reserved. 9/19

DS50002906A

**Table 1: PIC24FJ128GL306 PIM Mapping**

PIM Pin #	Device Pin #	PIC24FJ128GL306 I/Os	Function	Explorer 16/32 Net Name
1	—	—	—	P1_VBUS
2	10, 19, 26, 38	VDD + AVDD	VDD	VDD_PIM
3	24	TDO/AN11/RB11	LCD D5	P3_LCDD5__RB11
4	27	TCK/SEG18/AN12/RB12	LCD D6	P4_LCDD6__RB12
5	28	TDI/SEG19/AN13/RB13	LCD D7	P5_LCDD7__RB13
6	—	—	—	P6
7	—	—	—	P7
8	—	—	—	P8
9	—	—	—	P9
10	52	SEG23/RP25/RD4	mikroBUS™ A SPI SCK	P10_SCKA__RD4
11	50	SEG21/RP23/RD2	mikroBUS A SPI MISO	P11_MISOA__RD2
12	51	SEG22/RP22/RD3	mikroBUS A SPI MOSI	P12_MOSIA__RD3
13	7	MCLR	MCLR	P13_MCLR__MCLR
14	18	PGED2/AN7/RP7/T1CK/RB7	mikroBUS A Chip Select	P14_CSA__RB7
15	9, 20, 25, 41	Vss + AVss	Vss	Vss
16	10, 19, 26, 38	VDD + AVDD	VDD	VDD_PIM
17	60	COM3/RE0	LED D3	P17_LED3__RE0
18	42	SEG13/RP2/RD8	mikroBUS B Interrupt	P18_INTB__RD8
19	55	SEG26/C3INA/RD7	mikroBUS B Reset	P19_RSTB__RD7
20	57	AN16/RA0	10k Potentiometer	P20_POT__RA0
21	14	SEG5/AN2/C2INB/RP13/RB2	TC1047A Temp. Sensor	P21_TEMP__RB2
22	—	—	—	P22
23	45	SEG16/C3INC/RP12/RD11	mikroBUS B Chip Select	P23_CSB__RD11
24	30	SEG9/AN15/RP29/OCM1D/RB15	mikroBUS B Analog	P24_ANB__RB15
25	29	SEG8/AN14/RP14/OCM1C/RB14	General Purpose I/O	P25_ANA__USBOC__RB14
26	15	PGEC1/SEG6/CVREF-/AN1/AN1-/RP1/RB1	ICSP™ Prog/Debug PGC2	P26_PGC3__RB1
27	16	PGED1/SEG7/VREF+/CVREF+/AN0/RP0/RB0	ICSP Prog/Debug PGD2	P27_PGD3__RB0
28	—	—	—	P28
29	—	—	—	P29
30	10, 19, 26, 38	VDD + AVDD	VDD	VDD_PIM
31	9, 20, 25, 41	Vss + AVss	Vss	Vss
32	21	COM7/SEG31/AN8/RP8/RB8	General Purpose I/O	P32_CC2__RB8
33	22	COM6/SEG30/AN9/RP9/RB9	General Purpose I/O	P33_CC1__RB9
34	—	—	—	P34
35	—	—	—	P35
36	9, 20, 25, 41	Vss + AVss	Vss	Vss
37	10, 19, 26, 38	VDD + AVDD	VDD	VDD_PIM
38	61	COM2/RE1	LED D4	P38_LED4__RE1
39	—	—	—	P39
40	—	—	—	P40
41	—	—	—	P41
42	—	—	—	P42
43	—	—	—	P43
44	58	SEG27/RFO	LCD Register Select	P44_LCDRS__RFO
45	9, 20, 25, 41	Vss + AVss	Vss	Vss
46	10, 19, 26, 38	VDD + AVDD	VDD	VDD_PIM
47	13	SEG4/AN3/C2INA/RB3	General Purpose I/O	P47__RB3
48	4	SEG0/C1IND/RP21/RG6	General Purpose I/O	P48__RG6
49	34	SEG40/RP30/RF2	MCP2221A/mikroBUS B RX	P49_RXB__RF2
50	33	SEG12/RP16/RF3	MCP2221A/mikroBUS B TX	P50_TXB__RF3
51	44	SEG15/C3IND/RP3/RD10	mikroBUS A TX	P51_TXA__RD10
52	43	SEG14/RP4/RD9	mikroBUS A RX	P52_RXA__RD9

**Table 1: PIC24FJ128GL306 PIM Mapping (Continued)**

PIM Pin #	Device Pin #	PIC24FJ128GL306 I/Os	Function	Explorer 16/32 Net Name
53	8	SEG1/C2INC/RP27/RG9	General Purpose I/O	P53_MOSIB__RG9
54	53	SEG24/RP20/RD5	mikroBUS™ B SPI MISO	P54_MISOB__RD5
55	12	PGED3/SEG3/AN4/C1INB/RP28/ASDA1/OCM1B/RB4	General Purpose I/O	P55_SCKB__RB4
56	31	SEG10/RP10/SDA2/RF4	mikroBUS Shared I <sup>2</sup> C SDA	P56_SDA__RF4
57	32	SEG11/RP17/SCL2/RF5	mikroBUS Shared I <sup>2</sup> C SCL	P57_SCL__RF5
58	62	COM1/RE2	LED D5	P58_LED5__RE2
59	63	COM0/RE3	LED D6	P59_LED6__RE3
60	64	SEG63/HLVDIN/RE4	LED D7	P60_LED7__RE4
61	1	LCDBIAS2/RE5	LED D8	P61_LED8__RE5
62	10, 19, 26, 38	VDD + AVDD	VDD	VDD_PIM
63	39	OSCI/CLKI/RC12	Primary Oscillator In	P63_OSCI__RC12
64	40	OSCO/CLKO/RC15	Primary Oscillator Out	P64_OSOC__RC15
65	9, 20, 25, 41	Vss + AVss	Vss	Vss
66	—	—	—	P66
67	35	RP5/INT0/RF6	mikroBUS A Interrupt	P67_INTA__RF6
68	—	—	—	P68
69	—	—	—	P69
70	—	—	—	P70
71	—	—	—	P71
72	36	SEG47/RP31/SDA1/OCM1F/RG3	mikroBUS A PWM	P72_PWMA__RG3
73	—	—	—	P73_SOSCI
74	—	—	—	P74_SOSCO
75	9, 20, 25, 41	Vss + AVss	Vss	Vss
76	—	—	—	P76
77	—	—	—	P77
78	11	PGEC3/SEG2/AN5/C1INA/RP18/ASCL1/OCM1A/RB5	mikroBUS B PWM	P78_PWMB__RB5
79	17	PGEC2/LCDBIAS3/AN6/RP6/RB6	EEPROM Chip Select	P79_EECS__RB6
80	46	SEG17/RP11/RD0	Button 4	P80_S4__RD0
81	59	COM4/SEG48/OCM1E/RF1	LCD Enable	P81_LCDE__RF1
82	—	—	LCD R/W (pulled low by R4)	P82_LCDRW
83	37	SEG28/SCL1/RG2	Button 3	P83_S3__RG2
84	49	SEG20/RP24/RD1	Button 6	P84_S6__RD1
85	—	—	—	P85_VDDCORE
86	—	—	—	P86_ENVREG
87	—	—	—	P87
88	—	—	—	P88
89	5	VLCAP1/C1INC/C2INC/C3INC/RP26/RG7	General Purpose I/O	P89_USBDN__RG7
90	6	VLCAP2/C2IND/RP19/RG8	General Purpose I/O	P90_USBDP__RG8
91	2	LCDBIAS1/RE6	LED D9	P91_LED9__RE6
92	3	LCDBIAS0/RE7	Button 5/LED D10	P92_S5_LED10__RE7
93	—	—	—	P93_LCDD0
94	—	—	—	P94_LCDD1
95	54	SEG25/C3INB/RD6	mikroBUS A Reset	P95_RSTA__RD6
96	—	—	—	P96_VBUSON
97	—	—	—	P97
98	—	—	—	P98_LCDD2
99	—	—	—	P99_LCDD3
100	23	TMS/COM5/SEG29/CVREF/AN10/RP15/RB10	LCD D4	P100_LCDD4__RB10
—	47	SOSCI/RC13	Secondary Oscillator In	SOSCI
—	48	SOSCO/SCLKI/RP137/PWRLCLK/RC14	Secondary Oscillator Out	SOSCO
—	56	VCAP	VCAP	—

**Table 2: PIC24FJ128GL306 PIC® MCU Mapping**


Device Pin #	PIM Pin #	PIC24FJ128GL306 I/Os	Function	Explorer 16/32 Net Name
1	61	LCDBIAS2/RE5	LED D8	P61_LED8_RE5
2	91	LCDBIAS1/RE6	LED D9	P91_LED9_RE6
3	92	LCDBIAS0/RE7	Button 5/LED D10	P92_S5_LED10_RE7
4	48	SEG0/C1IND/RP21/RG6	General Purpose I/O	P48_RG6
5	89	VLAP1/C1INC/C2INC/C3INC/RP26/RG7	General Purpose I/O	P89_USBDN_RG7
6	90	VLAP2/C2IND/RP19/RG8	General Purpose I/O	P90_USBDP_RG8
7	13	MCLR	MCLR	P13_MCLR_MCLR
8	53	SEG1/C2INC/RP27/RG9	General Purpose I/O	P53_MOSIB_RG9
9, 20, 25, 41	15	Vss + AVss	Vss	Vss
10, 19, 26, 38	16	VDD + AVDD	VDD	VDD
11	78	PGEC3/SEG2/AN5/C1INA/RP18/ASCL1/OCM1A/RB5	mikroBUS™ B PWM	P78_PWMB_RB5
12	55	PGED3/SEG3/AN4/C1INB/RP28/ASDA1/OCM1B/RB4	General Purpose I/O	P55_SCKB_RB4
13	47	SEG4/AN3/C2INA/RB3	General Purpose I/O	P47_RB3
14	21	SEG5/AN2/C2INB/RP13/RB2	TC1047A Temp. Sensor	P21_TEMP_RB2
15	26	PGEC1/SEG6/CVREF-/AN1/AN1-/RP1/RB1	ICSP™ Prog/Debug PGC2	P26_PGC3_RB1
16	27	PGED1/SEG7/REF+/CVREF+/AN0/RP0/RB0	ICSP Prog/Debug PGD2	P27_PGD3_RB0
17	79	PGEC2/LCDBIAS3/AN6/RP6/RB6	EEPROM Chip Select	P79_EECS_RB6
18	14	PGED2/AN7/RP7/T1CK/RB7	mikroBUS A Chip Select	P14_CSA_RB7
21	32	COM7/SEG31/AN8/RP8/RB8	General Purpose I/O	P32_CC2_RB8
22	33	COM6/SEG30/AN9/RP9/RB9	General Purpose I/O	P33_CC1_RB9
23	100	TMS/COM5/SEG29/CVREF/AN10/RP15/RB10	LCD D4	P100_LCDD4_RB10
24	3	TDO/AN11/RB11	LCD D5	P3_LCDD5_RB11
27	4	TCK/SEG18/AN12/RB12	LCD D6	P4_LCDD6_RB12
28	5	TDI/SEG19/AN13/RB13	LCD D7	P5_LCDD7_RB13
29	25	SEG8/AN14/RP14/OCM1C/RB14	General Purpose I/O	P25_ANA_USBOC_RB14
30	24	SEG9/AN15/RP29/OCM1D/RB15	mikroBUS B Analog	P24_ANB_RB15
31	56	SEG10/RP10/SDA2/RF4	mikroBUS Shared I <sup>2</sup> C SDA	P56_SDA_RF4
32	57	SEG11/RP17/SCL2/RF5	mikroBUS Shared I <sup>2</sup> C SCL	P57_SCL_RF5

**Table 2: PIC24FJ128GL306 PIC® MCU Mapping (Continued)**

Device Pin #	PIM Pin #	PIC24FJ128GL306 I/Os	Function	Explorer 16/32 Net Name
33	50	SEG12/RP16/RF3	MCP2221A/mikroBUS™ B TX	P50_TXB_RF3
34	49	SEG40/RP30/RF2	MCP2221A/mikroBUS B RX	P49_RXB_RF2
35	67	RP5/INT0/RF6	mikroBUS A Interrupt	P67_INTA_RF6
36	72	SEG47/RP31/SDA1/OCM1F/RG3	mikroBUS A PWM	P72_PWMA_RG3
37	83	SEG28/SCL1/RG2	Button 3	P83_S3_RG2
39	63	OSCI/CLKI/RC12	Primary Oscillator In	P63_OSCI_RC12
40	64	OSCO/CLKO/RC15	Primary Oscillator Out	P64_OSOCO_RC15
42	18	SEG13/RP2/RD8	mikroBUS B Interrupt	P18_INTB_RD8
43	52	SEG14/RP4/RD9	mikroBUS A RX	P52_RXA_RD9
44	51	SEG15/C3IND/RP3/RD10	mikroBUS A TX	P51_TXA_RD10
45	23	SEG16/C3INC/RP12/RD11	mikroBUS B Chip Select	P23_CSB_RD11
46	80	SEG17/RP11/RD0	Button 4	P80_S4_RD0
47	—	SOSCI/RC13	Secondary Oscillator In	SOSCO
48	—	SOSCO/SCLKI/PI37/PWRLCLK/RC14	Secondary Oscillator Out	SOSCI
49	84	SEG20/RP24/RD1	Button 6	P84_S6_RD1
50	11	SEG21/RP23/RD2	mikroBUS A SPI MISO	P11_MISOA_RD2
51	12	SEG22/RP22/RD3	mikroBUS A SPI MOSI	P12_MOSIA_RD3
52	10	SEG23/RP25/RD4	mikroBUS A SPI SCK	P10_SCKA_RD4
53	54	SEG24/RP20/RD5	mikroBUS B SPI MISO	P54_MISOB_RD5
54	95	SEG25/C3INB/RD6	mikroBUS A Reset	P95_RSTA_RD6
55	19	SEG26/C3INA/RD7	MikroBUS B Reset	P19_RSTB_RD7
56	—	VCAP	—	—
57	20	AN16/RA0	10k Potentiometer	P20_POT_RA0
58	44	SEG27/RF0	LCD Register Select	P44_LCDRS_RF0
59	81	COM4/SEG48/OCM1E/RF1	LCD Enable	P81_LCDE_RF1
60	17	COM3/RE0	LED D3	P17_LED3_RE0
61	38	COM2/RE1	LED D4	P38_LED4_RE1
62	58	COM1/RE2	LED D5	P58_LED5_RE2
63	59	COM0/RE3	LED D6	P59_LED6_RE3
64	60	SEG63/HLVDIN/RE4	LED D7	P60_LED7_RE4

# PIC24FJ128GL306 General Purpose Plug-In Module (PIM) Information Sheet

## Schematic Revision 3.0

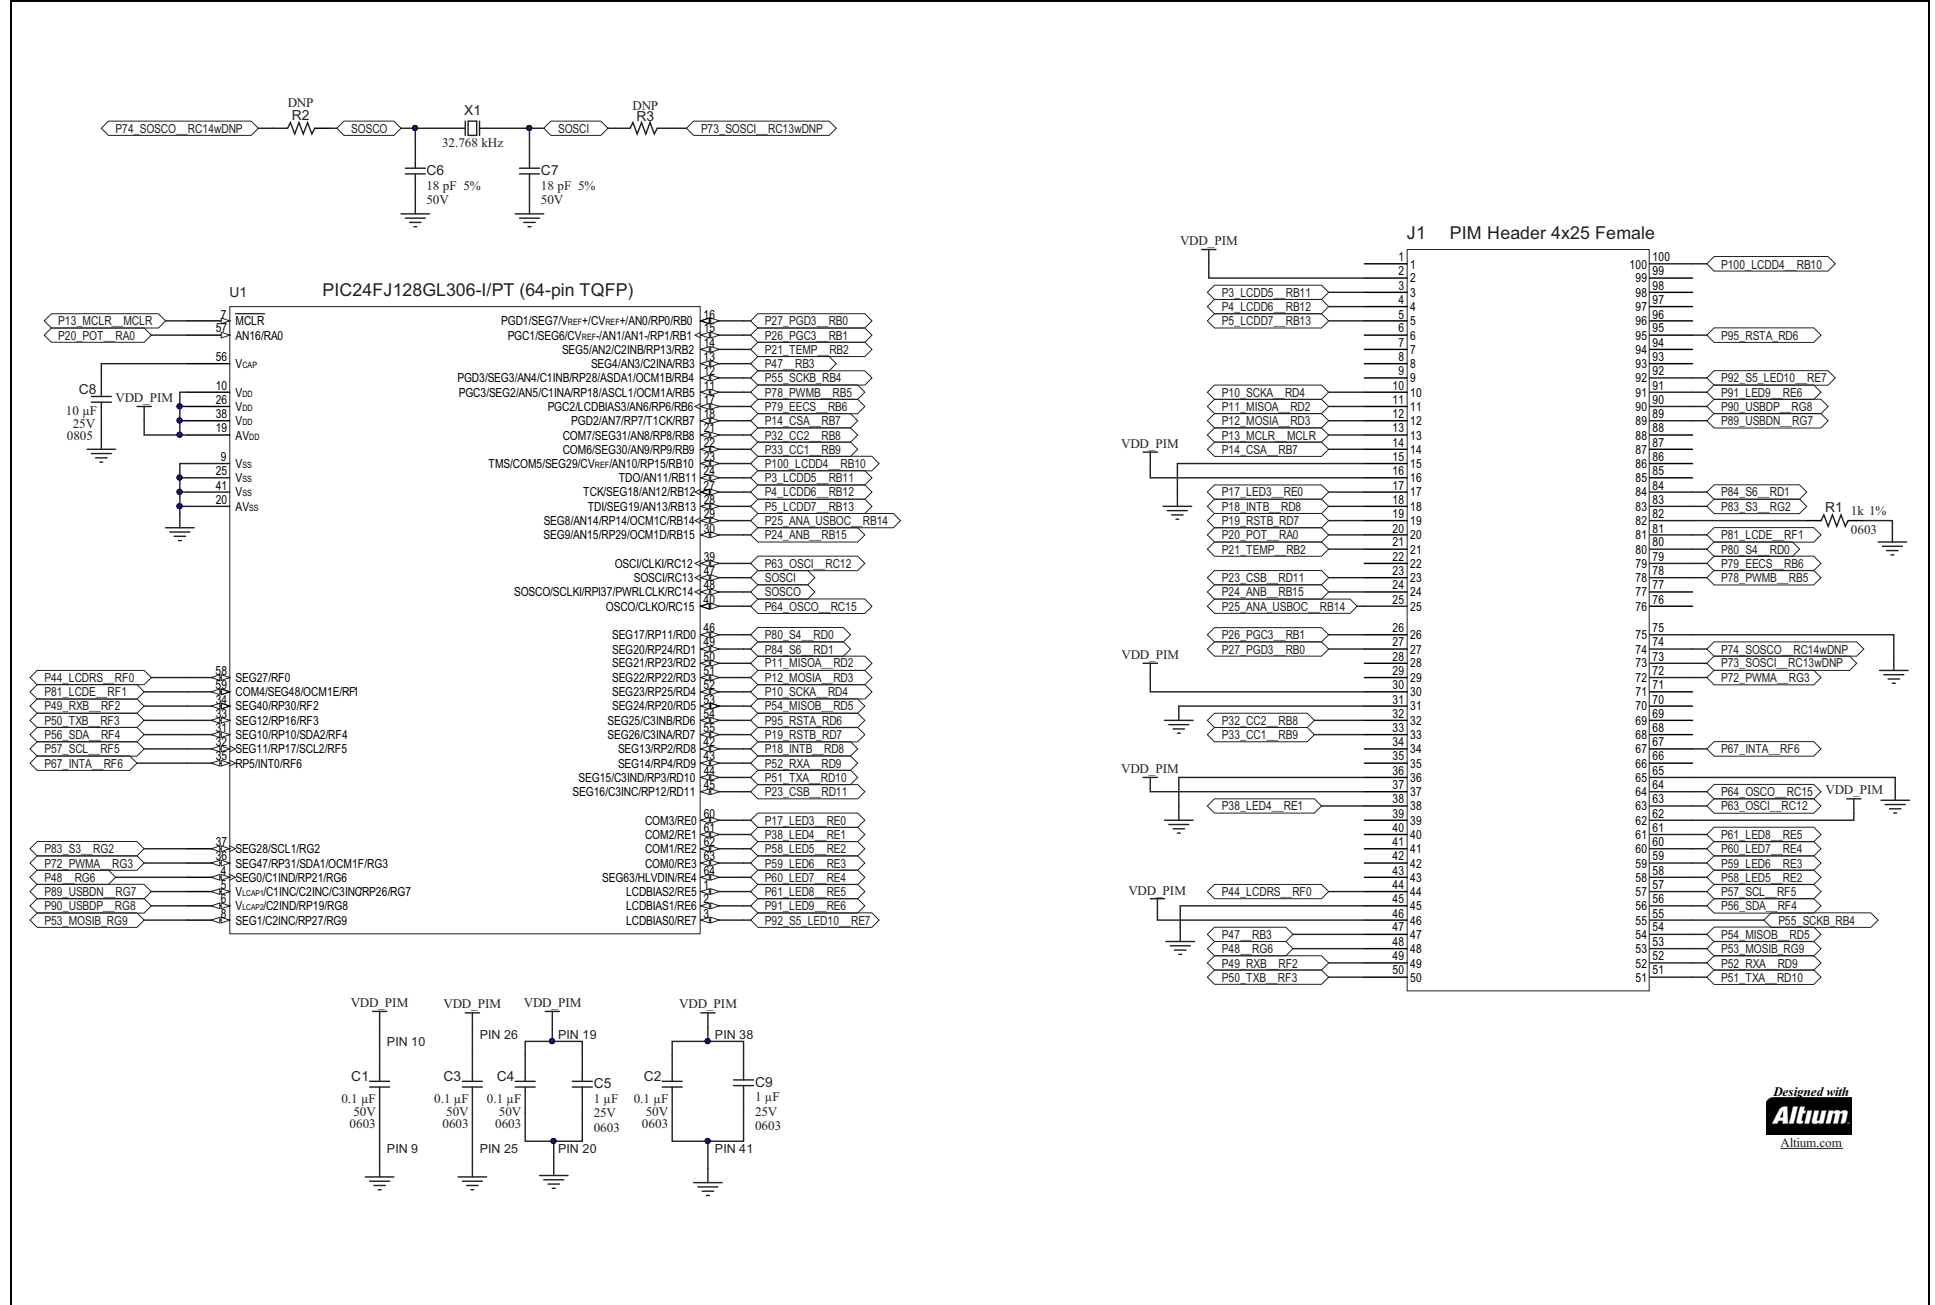

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Daughter Cards & OEM Boards](#) category:*

*Click to view products by [Microchip](#) manufacturer:*

Other Similar products are found below :

[MA320013](#) [MA320017](#) [ADZS-21262-1-EZEXT](#) [MPC574XG-176DS](#) [MPC5777C-516DS](#) [MPC5777M-512DS](#) [1585396-1](#) [1585939-1](#) [20-101-1254](#) [27911](#) [ADZS-USBLAN-EZEXT](#) [MA160016](#) [MPC5777C-416DS](#) [SPC56ELADPT144S](#) [TMDXRM46CNCD](#) [MPC574XG-324DS](#) [MIKROE-2051](#) [DM160216](#) [SPC560B64A100S](#) [MA180036](#) [MPC5777M-416DS](#) [SPC564AADPT324S](#) [KITMPC5643DBEVM](#) [Y-RH850-P1XC-100PIN-PB-T1-V1](#) [P0531](#) [P0431](#) [MIKROE-1289](#) [2711](#) [P0504](#) [EV-ADUCM350-BIO3Z](#) [IRAC1161-TO220](#) [QB-R5F104LE-TB](#) [1130](#) [MA160015](#) [MA180033](#) [MA240026](#) [MA320014](#) [MA330014](#) [MA330017](#) [TLK10034SMAEVM](#) [TMDSCNCD28054MISO](#) [TMDXSDV6467T](#) [TOOLSTICK330DC](#) [TOOLSTICK360DC](#) [MIKROE-2152](#) [MIKROE-2154](#) [MIKROE-2381](#) [MIKROE-2458](#) [TSSOP20EV](#) [DEV-11723](#)